

Turnitin Wahyudi, M.Si._C31_2

by W. Wahyudi

Submission date: 09-Mar-2022 01:26PM (UTC+0700)

Submission ID: 1780073620

File name: Susilawati_2018_J._Phys._Conf._Ser._1011_012009.pdf (437.32K)

Word count: 2910

Character count: 15050

PAPER • OPEN ACCESS

Electrical, Magnetic and Microwave Absorption Properties of M-type Barium Hexaferrites ($\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$)

To cite this article: Susilawati *et al* 2018 *J. Phys.: Conf. Ser.* **1011** 012009

8

View the [article online](#) for updates and enhancements.

You may also like

12

[Structural and magnetic properties of Cu-V substituted M-type barium hexaferrites](#)

Sami H Mahmood, Ahmad Awadallah, Yazan Maswadeh *et al.*

[Radiation Losses in the Microwave X Band in Al-Cr Substituted Y-Type Hexaferrites](#)

D. Basandral, R. K. Bedi, A. Dhimi *et al.*

[Tunable M-type nano barium hexaferrite](#)

[terial by \$\text{Zn}^{2+}/\text{Zr}^{4+}\$ co-doping](#)
Sachin Kumar Godara, Varinder Kaur, S B Narang *et al.*



The Electrochemical Society
Advancing solid state & electrochemical science & technology

242nd ECS Meeting

Oct 9 – 13, 2022 • Atlanta, GA, US

Abstract submission deadline: **April 8, 2022**

Connect. Engage. Champion. Empower. Accelerate.

MOVE SCIENCE FORWARD



Submit your abstract



Electrical, Magnetic and Microwave Absorption Properties of M-type Barium Hexaferrites ($\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$)

Susilawati¹, A Doyan¹, H Khair¹, M Taufik², Wahyudi²

¹Magister Science, Post Graduate of Mataram University, Mataram, Indonesia

²Faculty of Education and Teacher Training of Mataram University, Mataram, Indonesia

Email: susilawatihambali@yahoo.co.id

Abstract. M-type barium hexaferrites synthesis with Co-Ni doping ion $\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$ based on natural iron sand of Loang Balok beach, Lombok, Indonesia, to be applied as a microwave absorbent material using co-precipitation method. The materials used in the synthesis process are magnetite minerals (Fe_2O_3 and Fe_3O_4), 12M HCl, NH_4OH 37%, $\text{CoCl}_2 \cdot 6\text{H}_2\text{O}$ and $\text{NiCl}_2 \cdot 6\text{H}_2\text{O}$. This research to investigate the effect of doping ion concentration variation ($x = 0.0, 0.6$ and 1.0) and calcination temperature ($T = 80, 600,$ and 800°C) on electrical and magnetic properties and microwave absorption as well. The samples were characterized using Vibrating Sample Magnetometer (VSM) and Network Vector Analyzer (VNA). The result from VSM showed that the coercivity value decreased when doping ion concentration and calcination temperature increased (0.151 Tesla at 600°C for $x = 0.0$ and 0.044 Tesla at 800°C for $x = 1.0$). The value of magnetic saturation and the magnetic remanence increased with increasing ion concentration ($M_s = 0.327$ emu/g at $x = 0.0$ increased to 35.4 emu/g at $x = 1.0$) and $M_r = 0.148$ emu/g for $x = 0.0$ increased to 15.6 emu/g at $x = 1.0$, this indicates that the sample has been soft magnetic. The result from VNA showed that the electrical conductivity values measured in the range 8.0-15.0 GHz indicate that the sample is a semiconductor ($6.149 \times 10^{-6} - 5.975 \times 10^{-4}$ S/cm). It also showed that the microwave absorption properties increased at higher concentration of doping ions and the calcination temperature would increase the value of Reflection Loss (RL). The maximum RL value of the sample is -14.47 dB at 12.38 GHz, the absorption coefficient of 96.43%. These results indicate that the $\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$ sample can be applied as a microwave absorbent material on X-band to Ku-band frequency.

Keywords: Barium M-Hexaferrites, electrical and magnetic properties, natural iron sand, microwave absorber

1. Introduction

The rapid technological developments have an impact on increasing pollution of electromagnetic interferences (EMI) in the environment that can affect life, so research on microwave absorbent is an important topic. One of the materials that can be utilized as a microwave absorbent is Barium M-Hexaferrites (BaM). The ferrites (Fe) is basic material of synthesizing permanent magnet BaM, in which the iron element is obtained by separating the magnetite material from the natural iron sand. The utilization of natural iron sand is currently less optimal because it is only used as a mixture of cement. In fact, the natural iron sand contains iron oxide in the form of magnetite (Fe_3O_4), maghemite ($\text{Y-Fe}_2\text{O}_3$) and hematite ($\alpha\text{-Fe}_2\text{O}_3$) which has the potential to be processed into various products with higher economic value. The natural iron sand used in this study came from the Loang Balok beach in Sekarbela Sub-district, Mataram City, Lombok, Indonesia. The BaM has a hexagonal molecular structure ($\text{BaFe}_{12}\text{O}_{19}$), high saturation magnetization (78 emu/g), large coercivity field (6700 Oe), high Curie temperature (450°C), chemical stability and good corrosion resistance, with magnetic and electric properties adjustable



Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

according to the required application [1]. However, the high coercivity field causes weak absorption properties so it is less effective to use as microwaves absorbent material. To overcome this problem, need substitution of a Fe^{3+} ion with other metal cations of similar sizes, such as Al^{3+} , Ga^{3+} , and Cr^{3+} in order to decrease the magnetism of BaM from hard to soft magnetic [2]. A number of studies have been conducted to modify the magnetic properties of BaM such as the use of Co-Zn, Co- Mn, and Mn -Ni ions [3,4], Mn-Ti, Co-Ti, Ni-Ti, and Zn-Ti [5], As well as Co-Zn and Ni-Zn [6]. The substitution carried out in this study would use a combination of transition metal elements Co-Ni, because these two elements have radii and ionic configuration similar to Fe^{3+} (ionic radii $Fe = 0.077$ nm; $Co = 0.072$; and $Ni = 0.069$) was then analyzed for its effect on the electrical and magnetic properties of $BaFe_{12-2x}Co_xNi_xO_{19}$ based on natural iron sand produced to be applied as a microwave absorbent material.

2. Materials and Methods

The material used in sample synthesis was 368.937 grams of natural iron sand in magnetite compound (Fe_3O_4), $BaCO_3$ Merck KGaA 64271 Darmstadt. The solvent utilizes hydrochloric acid (HCl) 37% 12.063 M, NH_4OH solution 6.5 M and distilled water. The materials for doping Cobalt (II) Chloride Hexahydrate ($CoCl_2 \cdot 6H_2O$) PA and Nickel (II) Chloride Hexahydrate ($NiCl_2 \cdot 6H_2O$) PA. The synthesis process was carried out as follows. The separation of natural iron sand by using a permanent magnet (3.6 T) to separate the magnetite material from the sand. The Ferrite (Fe) content testing in a magnetic material with Atomic Absorption Microscopy (AAS) type Perkin Elmer Analyst 400 and X-Rays Fluorescent (XRF) Rigaku Supermini 200 type. The separation of Fe_3O_4 as the basic ingredient of synthesis. The sample synthesis using co-precipitation method [3]. The Vibrating Sample Magnetometer (VSM) Oxford type for its magnetic properties, the Network Vector Analyzer (VNA) Advantest R3770 in range frequency 300 kHz - 20 GHz at 220 volt and 1 ampere to measure the electrical properties and the microwave absorption.

3. Results and Discussion

The magnetic material obtained from 50.033 g of sand of Loang Balok Beach after separation using permanent magnet is 46.775 g. The analyzed using AAS was obtained iron 12.816 mg/g, the result from XRF show that iron element is 62.1% weight in the Fe_2O_3 compound of 51.5% weight. These results were reinforced by XRD show that the dominant phase generated is hematite (Fe_2O_3) and magnetite (Fe_3O_4) phases corresponding to the average crystal size of 574.5967 Å.

The magnetic properties of samples described in Table 1 and Figure 1. Theoretically BAM synthesized based $FeCl_3$ from the manufacturer has a value of M_s of 72 emu/ g and H_c value of 6.7 T. When compared with the results obtained have shown impaired H_c Which is very significant to 0.151 T for sample $BaFe_{12}O_{19}$ ($x = 0,0$); 0.060 T for samples $BaFe_{10,8}Co_{0,6}Ni_{0,6}O_{19}$ ($x = 0,6$) and 0,044 T for sample $BaFe_{10}Co-NiO_{19}$ ($x = 1,0$). It can be concluded that the samples $BaFe_{12-x}Co_xNi_xO_{19}$ made from iron sand nature doped by metal Co-Ni could reduce the magnetic properties of samples from hard into a soft magnetic that can be applied as a mineral absorber of microwaves. The other studies have shown that mineral absorbing radar waves most

Preferably at low coercive value of 0.0506 Tesla at $x = 0.3$ [7].

Table 1. The Magnetic properties of BaM with different concentration of ion doping Co-Ni.

x	Sample	H_c (T)	M_r (emu/g)	M_s (emu/g)
0	$BaFe_{12}O_{19}$	0,151	0,148	0,327
0,6	$BaFe_{10,8}(Co-Ni)_{0,6}O_{19}$	0,060	2,84	6,79
1,0	$BaFe_{10}(Co-Ni)_{1,0}O_{19}$	0,044	15,6	35,4

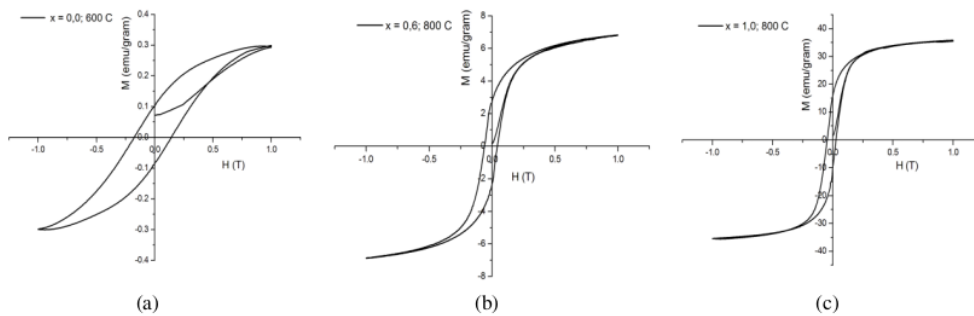


Fig. 1. The Hysteresis loops of a). $\text{BaFe}_{12}\text{O}_{19}$ b). $\text{BaFe}_{10.8}\text{Co-Ni}_{0.6}\text{O}_{19}$ c). $\text{BaFe}_{10}\text{Co-NiO}_{19}$

The electrical properties of the sample were characterized by using VNA, the conductivity value was in the range of 2.892E^{-05} - 8.059E^{-04} S/cm for sample $\text{BaFe}_{12}\text{O}_{19}$ ($x = 0.0$); 7.634E^{-05} - 8.078E^{-04} S/cm for sample $\text{BaFe}_{10.8}\text{Co}_{0.6}\text{-Ni}_{0.6}\text{O}_{19}$ ($x = 0.6$); and 7.318E^{-05} - 6.086E^{-04} S/cm for sample $\text{BaFe}_{10}\text{Co-NiO}_{19}$ ($x = 1.0$). These results indicate that the conductivity value is in the range of semiconductor properties since they are in the range of 10^{-7} - 10^3 S/cm [8]. As a microwave absorbent, the mineral must be semiconductor because it can convert microwave into heat energy, form an electric field on an absorbent surface. The current will flow as the surface current, when the current flows into the absorber, the microwave energy will be converted in the form of heat energy [9].

Figure 2(a) showed that the permittivity (ϵ) and permeability (μ) values of the samples in complex numbers. The real value indicates the magnitude of the microwave energy stored in the material and the imaginary one shows the amount of microwave energy which is dissipated in the form of energy loss [10]. This combination of real and imaginary values are the determinant of the frequency of microwave absorbent material. The real permittivity value (ϵ') for all three samples tended to be constant at frequency (10.0-11.8) GHz and to be increased at frequency (12.0-15.0) GHz. The value of ϵ' increases with the increase of the doping mole fraction and the calcination temperature (from 17.8 at $x = 0.0$ to 20.09 at $x = 1.0$), but does not apply to doping $x = 0.6$ with the decreasing ϵ' value. The increase in the value of ϵ' is due to the transformation of Fe^{3+} ions into Fe^{2+} ions due to doping causing polarization on the sample surface [11]. A decrease in the value of ϵ' occurring in the sample by doping $x = 0.6$ because the covering leads to the occurrence of lattice distortion thereby increasing electron scattering and resistivity [12].

Figure 2(b) showed that a graph of the relationship between the imaginary permittivity (ϵ'') of the sample at the measurement frequency range (10.0-15.0) GHz. Compared with the real permittivity value of the sample, the resulting imaginary permittivity value is lower. This means that the ability to form an electric field in the sample is higher when compared to the ability of samples in releasing electrical energy. The resulting permeability (μ) value (Figure 2b) decreases as the doping mole fraction and the calcination temperature increased. For the sample $x = 0.6$ it yields a real part of permeability (μ') lower than the sample $x = 0.1$ and results for imaginary part of permeability (μ'') higher than the sample $x = 0.1$ compared to $x = 0.6$.

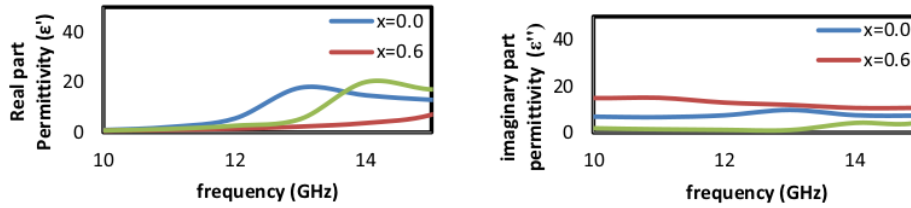


Fig.2(a). The Value of Sample Permittivity

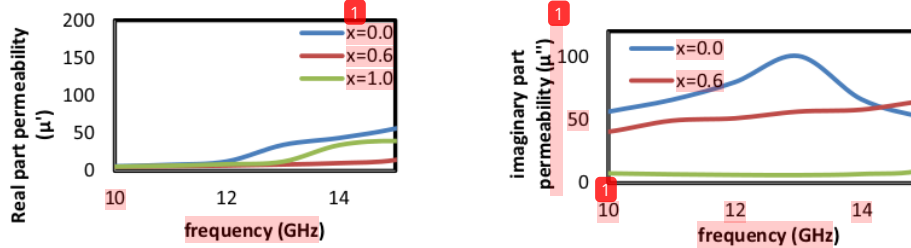


Fig. 2(b). The value of Permeability

The identification of microwave absorption properties was done through characterization using VNA resulting in data s parameters consisting of values S_{11} and S_{21} in the form of real and imaginary numbers used to determine the Reflection Loss (RL) value of the sample. The real and imaginary part of permittivity (ϵ) dan permeability (μ) was using equation (1) and (2)

$$\epsilon = \frac{\lambda_0^2}{\mu} \left\{ \frac{1}{\lambda_c^2} - \left[\frac{1}{2\pi L} \ln\left(\frac{1}{r}\right) \right]^2 \right\} \quad (1)$$

$$\mu = \frac{1-r}{\lambda^{(1-r)} \sqrt{\frac{1}{\lambda_0^2} - \frac{1}{\lambda_c^2}}} \quad (2)$$

$$Z_{in} = Z_0 \sqrt{\frac{\mu_r}{\epsilon_r}} \tanh \left(i \left[\frac{2\pi L}{\lambda_0} \right] \sqrt{\mu_r \epsilon_r} \right) \quad (3)$$

Where Z_{in} is impedance through to the sample and Z_0 is impedance free space $\sim 377 \Omega$. The value of reflection loss (RL) was calculated using equation (4).

$$RL = 20 \log \left| \frac{(Z_{in} - Z_0)}{(Z_{in} + Z_0)} \right| \quad (4)$$

Figure 3 shows the absorption intensity value (RL) in the frequency range (8.0-15.0 GHz) for each sample. The maximum RL value for the $\text{BaFe}_{10}\text{Co-NiO}_{19}$ sample at a frequency of 12.38 GHz was -14.47 dB with an absorbcency coefficient of 96.43%. The RL value and absorpcion coefficient indicate the ability of microwave absorption. The greater the negative RL value caused the greater the absorpcion capacity of the material to absorb microwave [13]. Based on the data it is found that the higher concentration of Co-Ni doping fraction and calcination temperature cause the higher RL value and the resulting absorpcion coefficient.

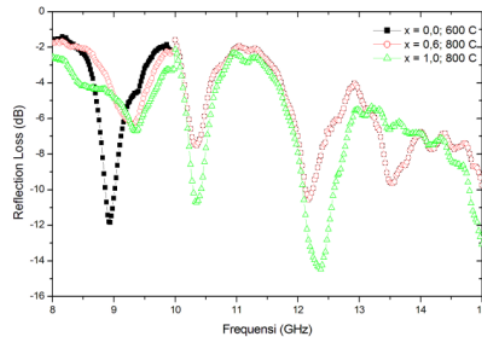


Fig. 3. The Value of Reflection Loss (RL) for Different Frequency and Concentration of Ion Doping

4. Conclusion

The $\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$ sample of the resulting natural iron sand has the dominant phase of Barium Iron Oxide and Hematite. The electrical properties of the sample show that the conductivity value in the range of 6.149×10^{-6} - 5.975×10^{-4} S/cm as a semiconductor. The magnetic properties of the samples indicate that soft magnetic, since the sample coercivity value has decreased significantly from 0.151 to 0.044 Tesla with an increase in the concentration of ion doping and temperature. The nature of microwave absorption yields a maximum RL value of -14.47 dB at 12.38 GHz frequency, and absorption coefficient of 96.43%. These results indicate that the $\text{BaFe}_{12-2x}\text{Co}_x\text{Ni}_x\text{O}_{19}$ -based sample of natural iron sand can be used as a microwave absorbent material on x-band frequencies up to Ku-band.

Acknowledgement

We acknowledge the support from the analytical chemistry laboratory of Mataram University and the member of material physics research groups from the Physics Department of Bandung Institute of Technology.

Funding Information

We thank the education department of research and technology for providing the research grant.

References

- [1] Saidah I N, and Zainuri M, 2012 Effect of pH Variation of HCl Solvent in Barium Synthesis M-Hexaferrite With Doping Zn ($\text{BaFe}_{11}\text{Zn}_4\text{O}_{19}$) Using Co-precipitation Method *Journal of Science and Art ITS* (1), B41-B46
- [2] Vinnik D A, Zhrebtsov D A, Mashkovtseva L S, Nemrava S, Bischoff M, Perov N S, and Niewa R, 2014 Growth, Structural and Magnetic Characterization of Al-substituted Barium Hexaferrite Single Crystals *Journal of Alloys and Compounds* **615** pp 1043-1046
- [3] Susilawati, Doyan A, and Sahlam, 2017 Synthesis and Characterization Materials M-Barium Hexaferrite Doping Ions Co-Mn Nano Particle. In IOP Conference Series: Materials Science and Engineering *IOP Publishing* Vol.196 No. 1 p 012016

- [4] Susilawati, Doyan A, and Munib M, 2015 Synthesis by Co-precipitation Method and Characterization of Nickel-doped Barium M-Hexaferrite ($\text{BaFe}_{12}\text{O}_{19}$) *Proceeding ICMSE* ISBN 9786021570425
- [5] Sözeri H, Deligöz H, Kavas H, and Baykal A, 2014 Magnetic, Dielectric and Microwave Properties of M-Ti Substituted Barium Hexaferrites ($\text{M} = \text{Mn}^{2+}, \text{Co}^{2+}, \text{Cu}^{2+}, \text{Ni}^{2+}, \text{Zn}^{2+}$), *Ceramics International* **40** (6) 8645-8657
- [6] Agustianto R, and Widyastuti W, 2014 Mol Fraction and Ph Variation against Magnetic Properties and Micro Barium Hexaferrite With A Sol-Gel Auto Combustion Method *Journal of Engineering ITS* **3** (1) F108-F112
- [7] Rahmawati, Kusumawati D T, Rohmawati L, 2015 Variations of Fe_3O_4 Addition in Pani/ Fe_3O_4 Alloys As Micro Wave Absorbents *Journal of Physics* vol. **04** Number 01 pp 1-5.
- [8] Said L M, 2013 Analysis of the Conductivity Properties of Electrics in Several Types of Materials with Remote Potential Methods *Journal of Teknosains* vol.7 p. 66-67.
- [9] Mahmood S H, Aloqaily A N, Maswadeh Y, Awadallah A, Bsoul I, Awawdeh M, and. Juwhari H 2015 Effects of Heat Treatment on the Phase Evolution, Structural, and Magnetic Properties of Mo-Zn Doped M-Type Hexaferrites In Solid State Phenomena *Trans Tech Publications* Vol. **232** pp 65-92
- [10] Wagner T R, 1998 Preparation and Crystal Structure Analysis of Magnetoplumbitetype $\text{BaGa}_{12}\text{O}_{19}$ *J. Solid State Chem.* **136** pp 120-124
- [11] C Li, Wang J, Wang J N, 2012 Magnetic and Microwave Absorbing Properties of Electro spun $\text{Ba}(1-x)\text{La}_x\text{Fe}_{12}\text{O}_{19}$ Nanofibers *Journal of Magnetism and Magnetic Materials* **324** (7) 1305-1311.
- [12] Zhang W, Bai Y, Han X, Qiao L, 2013 Magnetic Properties of Co-Ti Substituted Barium Hexaferrite. *Journal of Alloys and Compounds* **546** pp 234-238.
- [13] Nature R S, Moradi M, Rostami M, Nikmanesh H, Moayedi R, Bai Y, 2015 Structural, Magnetic and Microwave Absorption Properties of Doped Ba-hexaferrite Nanoparticles Synthesized by Co-Precipitation Method *Journal of Magnetism and Magnetic Materials* **381** 1-9

ORIGINALITY REPORT

24%

SIMILARITY INDEX

15%

INTERNET SOURCES

20%

PUBLICATIONS

%

STUDENT PAPERS

PRIMARY SOURCES

1	A. Doyan, Susilawati, M. Taufik, Wahyudi. "Electrical properties of M-type barium hexaferrites (BaFe ₁₂ ZnMnO ₁₉)", AIP Publishing, 2020 Publication	5%
2	lppm.unram.ac.id Internet Source	4%
3	eprints.unsri.ac.id Internet Source	3%
4	jppipa.unram.ac.id Internet Source	2%
5	ir.unikl.edu.my Internet Source	2%
6	Susilawati, Aris Doyan. "Characteristics of Barium M-Hexaferrite with Doping Mn and Ni in X-Band Frequency for Microwave Absorption", Materials Science Forum, 2021 Publication	1%
7	Mukhtar Effendi, Endra Nugraha, Wahyu Tri Cahyanto, Wahyu Widanarto. "The effects of	1%

milling time on structure, magnetic properties and microwave absorption capability of strontium lanthanum ferrite compounds", *Journal of Physics: Conference Series*, 2020

Publication

8 repository.unhas.ac.id 1 %
Internet Source

9 worldwidescience.org 1 %
Internet Source

10 Susilawati, Aris Doyan, Muhammad Taufik, Wahyudi. "The structure of barium M-hexaferrite ($BaFe_{12-2x}Co_xNi_xO_{19}$) powders using co-precipitation methods", *AIP Publishing*, 2020 1 %
Publication

11 Reza Taherian, Alireza Soleymani, Saheb Manafi. "The Effects of Co-Mn-Ti and Zn-Mg-Ti Substitutions on the Structural, Magnetic and Physical Properties of Barium Hexaferrites Synthesized by the Co-precipitation Method", *IEEE Magnetics Letters*, 2016 1 %
Publication

12 www.aabu.edu.jo 1 %
Internet Source

13 repository.uin-malang.ac.id 1 %
Internet Source

sinta3.ristekdikti.go.id

14

Internet Source

1 %

15

Fahriye Seven, Nurettin Sahiner. " NaOH modified P(acrylamide) hydrogel matrices for metal nanoparticles preparation and their use in H₂ generation from hydrolysis of NaBH₄ ", Journal of Applied Polymer Science, 2014

Publication

1 %

16

M C Aisiyah, M Zainuri, D Ristiani. "Magnetic and microwave absorbing properties of Zn-substituted Barium M-Hexaferrite in X-band frequency range", IOP Conference Series: Materials Science and Engineering, 2019

Publication

1 %

Exclude quotes On

Exclude matches < 1%

Exclude bibliography On