

B25

by Rahadi Wirawan

Submission date: 25-Mar-2022 07:50PM (UTC+0700)

Submission ID: 1792670082

File name: Lamp._B25.pdf (488.26K)

Word count: 1665

Character count: 8867



Conference Paper

Preliminary Study of Double Beta Decay: Simulation of CaMoO_4 Scintillation Detector Response Function to the Gamma Ray Radiation

Mitra Djamal^{1,2}, Rahadi Wirawan³, Syeilendra Pramuditya¹, and Hongjoo Kim⁴

¹Department of Physics, Institut Teknologi Bandung, Bandung 40132, Indonesia

²Department of Physics, Institut Teknologi Sumatera, South Lampung 35365, Indonesia

³Department of Physics, Universitas Mataram, Mataram 83125, Indonesia

⁴Radiation Science Research Institute, Department of Physics, Kyungpook National University, Daegu 702-701, Korea

Abstract

CaMoO_4 crystal is a material candidate for the scintillation detector and double beta decay experiment to determine a neutrino mass. The objective of this work is to analyze the response function of CaMoO_4 using Monte Carlo GEANT4 simulation. Penelope-low energy method was used as an interaction type for the electromagnetic process. The simulation results show that the presence of the photopeak energies of gamma ray from Cs-137, Co-60 and K-40 sources can be identified and observed in the energy 0.662 MeV, 1.17 MeV, 1.33 MeV and 1.5 MeV. The photoelectric cross section interaction of CaMoO_4 is lower than NaI(Tl), but in other hand the incoherent cross section is vice versa.

Keywords: Scintillation, CaMoO_4 , GEANT4, Gamma ray

Corresponding Author: Mitra Djamal; email: mitra@fi.itb.ac.id

Received: 1 August 2016

Accepted: 18 August 2016

Published: 6 September 2016

Publishing services provided by Knowledge E

© Mitra Djamal et al. This article is distributed under the terms of the [Creative Commons Attribution License](#), which permits unrestricted use and redistribution provided that the original author and source are credited.

Selection and Peer-review under the responsibility of the ICoSE Conference Committee.

OPEN ACCESS

1. Introduction

Double beta decay (DBD) is important source information about the fundamental neutrinos character such as neutrino mass. ^{100}Mo is a material element for the neutrinoless double beta decay ($0\nu\text{DBD}$) searching except for the ^{82}Se , ^{116}Cd and ^{76}Ge elements [1,2]. As a detector material, CaMoO_4 is a promising material candidate for the scintillation detector and double beta decay experiment to determine a neutrino mass.

In order to analyze the presence of $0\nu\text{DBD}$ peak, the information about the detector response function (DRF) is an important in the identification of the peak energy, especially in the presence of the internal and the external background radiation. Computer simulation could be done as a preliminary step for analyzing the DRF characteristic of a detector material and Monte Carlo simulation is one approach that can be applied.

Monte Carlo simulation has been established as an appropriate method for modeling and useful for predicting the experiment results, especially for validation of the detector model [3]. In the previous study, we have successfully simulated the DRF of NaI(Tl) scintillation crystal using Penelope Monte Carlo GEANT4 [4]. Furthermore, in this work we focus to study the response function characteristic of CaMoO_4 crystal

detector to the gamma ray radiation. The work was conducted based on the Monte Carlo simulation method using the GEANT₄ simulation toolkit.

2. Methodology

2.1. Scintillation Detector

The unstable nuclide emits a type of radiation, such as α , β , or γ rays to become a stable nuclide and the amount of energy will be released in these processes. Identification of the energy based on the detected radiation, which is presented as an energy spectrum distribution.

In the energy spectrum distribution, spectral peaks can be treated as simple Gaussian. The energy resolution (R) is a parameter that describing the characteristic of the detector response function (DRF) of the energy radiation from a source.

$$R \cong \frac{FWHM}{H_0} \quad (1)$$

where FWHM is the full width at one-half of the maximum height peak and H_0 is a photopeak energy.

GEANT₄ (*GEometry AND Tracking*) is a type of Monte Carlo simulation that used to simulate the photon through the matter. This simulation, give a chance for user to reconstruct a detector model, detection system and physical interaction process involved [5]. In the GEANT₄, the electromagnetic interaction process like photoelectric effect, Compton scattering, Rayleigh scattering and pair production are implemented in the standard and low energy packages (Livermore and Penelope). They are differentiated based on the energy range for each process [6].

2.2. Simulation

Schematic design of the simulation was reconstructed as shown in Fig. 1(a). In this work, the detector model construction for the 3 in. x 3 in. was adopted from detector information [7, 8]. The precise dimension of the detector and its position must be entered in the detector construction code of GEANT₄ simulation except the detail of photomultipliers. The interaction type for the GEANT₄ electromagnetic process is a Penelope-low energy package with the beamon setup is about 5.0×10^7 beamon. Cs-137, Co-60 and K-40 of energy radiation are used for gamma ray point source setup.

In order to perform the counting events result in the Gaussian curve energy distribution (smearing curve) using ROOT analysis, we convert the energy resolution (R) or the full width at one-half of the maximum height (FWHM) to the Gaussian deviation (σ) based on the following formula [9].

$$\sigma = \frac{FWHM}{2.35} \quad (2)$$

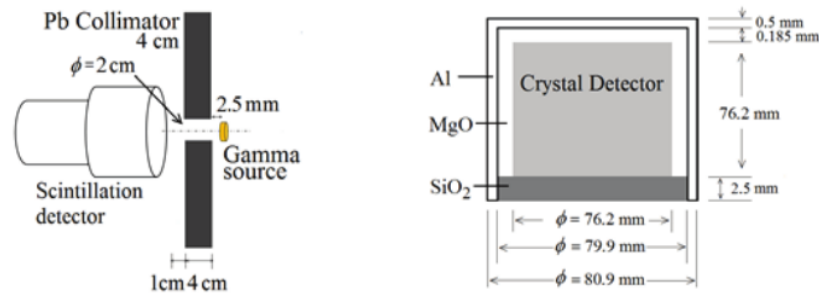


Figure 1: Schematic design of detector and simulation geometry construction.

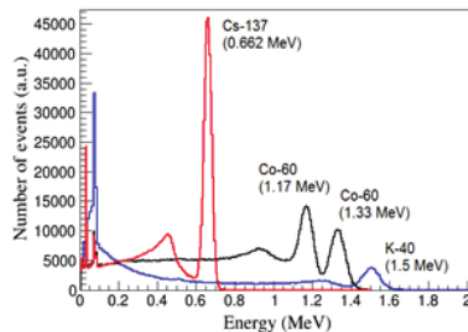


Figure 2: Energy spectrum distribution of Cs-137, Co-60 and K-40 detected using CaMoO_4 .

3. Results and Discussion

The response function of CaMoO_4 detector (DRF) for the several energy radiation source was described as an energy distribution curve as shown in Fig. 2. The comparison of detector response to the Cs-137 energy in the Fig. 3 shows that the photopeak (photoelectric effect) energy of Cs-137 which detected in the CaMoO_4 is lower than NaI(Tl). Although, the entries of detector that making interaction of the NaI(Tl) is less than CaMoO_4 , i.e. 1065970 and 117412. On the other hand, the Compton edge peak of CaMoO_4 is higher than NaI(Tl). Fig. 4 shows the Gaussian peak of the photopeak for the several gamma energy sources like Cs-137, Co-60 and K-40.

The result shown that the photoelectric cross section interaction of the NaI(Tl) is higher than CaMoO_4 and for the incoherent cross section is vice versa. According to the XCOM program analysis of the value of total attenuation coefficient, these results have the same trend. The attenuation of photoelectric absorption of 0.66 MeV for NaI(Tl) is about $1.736 \times 10^{-2} \text{ (cm}^2/\text{g)}$ and CaMoO_4 is $8.466 \times 10^{-4} \text{ (cm}^2/\text{g)}$. The attenuation of incoherent scattering of 0.66 MeV for NaI(Tl) is about $6.604 \times 10^{-2} \text{ (cm}^2/\text{g)}$ and $7.549 \times 10^{-2} \text{ (cm}^2/\text{g)}$ for CaMoO_4 .

In addition, we are also simulating the detector response to beta ray radiation from the Cs-137 source as an initial process for beta ray detection. The energy distribution of beta rays was described by the blue line curve as shown in the Fig. 5.

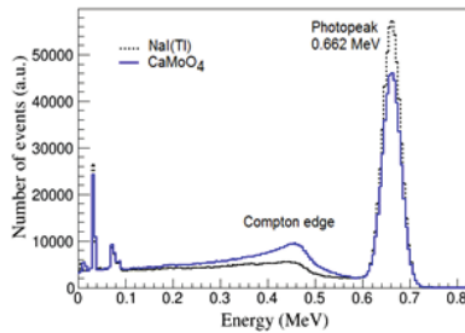


Figure 3: Energy spectrum distribution of Cs-137 detected by NaI(Tl) and CaMoO₄.

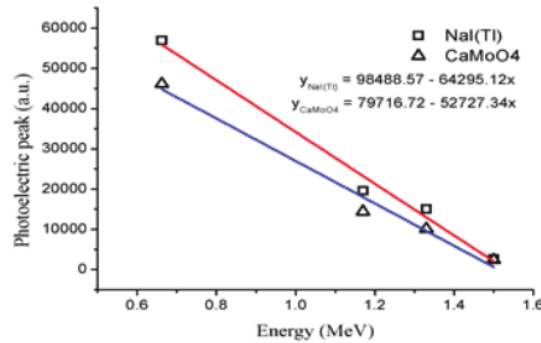


Figure 4: Gaussian peak of photopeak energy for the NaI(Tl) detector and CaMoO₄.

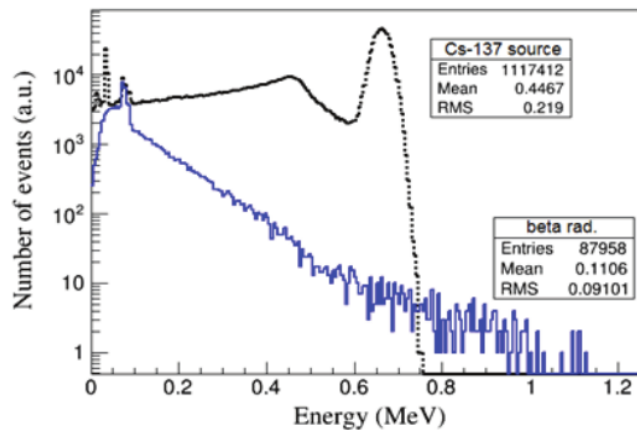


Figure 5: Energy spectrum distribution of beta radiation from Cs-137 source for CaMoO₄ detector.

As we know that the beta radiation is a continuous energy spectrum as depicted in the Fig. 5. The beta energies spectrum is lower than the gamma energy spectrum. In particular, double beta decay is second weak and rare process when single beta decay

energetically not allowed. Therefore, to observe the present of double beta decay energy spectrum, we need to set up the condition for the low background radiation.

4. Conclusions

The response function of CaMoO_4 detector (DRF) for the Cs-137, Co-60 and K-40 radiation sources was simulated using Monte Carlo GEANT4. The photoelectric cross section interaction of CaMoO_4 is lower than NaI(Tl) , but in other hand the incoherent cross section of CaMoO_4 is higher than NaI(Tl) . Set up condition of low background radiation is needed in order to observe the beta radiation.

5. Acknowledgment

This work was supported by Innovation Research Grant ITB 2015.

References

- [1] M. Tenconi, LUMINEU: a pilot scintillating bolometer experiment for neutrinoless double beta decay search, *Phys Procedia*, **61**, 782–786, (2015).
- [2] N. Abgrall, et al., The Majorana Demonstrator Neutrinoless Double-Beta Decay Experiment, *Advances in High Energy Physics*, (2014).
- [3] A. F. Bielajew, in *Fundamentals of the Monte Carlo method for neutral and charged particle transport*, Department of Nuclear Engineering and Radiological Sciences, The University of Michigan, 2001.
- [4] R. Wirawan, M. Djamal, A. Waris, G. Handayani, and H. J. Kim, Investigation of Incoherent Gamma-Ray Scattering Potential for the Fluid Density Measurement, *Applied, Mech Mater*, **575**, 549–553, (2014).
- [5] S. Agostinelli, et al., GEANT4—a Simulation Toolkit, *Nucl Instrum Methods Phys Res A*, **506**, 250–303, (2003).
- [6] V. N. Ivanchenko, S. Incerti, Z. Francis, H. N. Tran, M. Karamitros, M. A. Bernal, C. Champion, and P. Guèye, Combination of Electromagnetic Physics Processes for Microdosimetry in Liquid Water with the Geant4 Monte Carlo Simulation Toolkit, *Nucl Instrum Methods Phys Res B*, **273**, 95–97, (2012).
- [7] H. -X. Shi, B. -X. Chen, T. -Z. Li, and D. Yun, Precise Monte Carlo simulation of gamma-ray response functions for an NaI(Tl) detector, *Appl Radiat Isot*, **57**, 517–524, (2002).
- [8] M. Abd-Elzaher, M. S. Badawi, A. El-Khatib, and A. A. Thabet, Determination of Full Energy Peak Efficiency of NaI(Tl) Detector Depending on Efficiency Transfer Principle for Conversion From Experimental Values, *World, J Nucl Sci Technol*, **02**, 65–72, (2012).
- [9] G. F. Knoll, in *Radiation Detection and Measurement*, John Wiley & Sons Inc, New York, 2nd ed edition, 1989.

ORIGINALITY REPORT

18%

SIMILARITY INDEX

15%

INTERNET SOURCES

11%

PUBLICATIONS

13%

STUDENT PAPERS

PRIMARY SOURCES

1	Submitted to Universitas Negeri Jakarta Student Paper	7%
2	Jie Xiong, Jifeng Han, Jie Tian, Yi Liu, Zhiguo Xi, Weixing Du, Xiaoli Wu, Sheng Hu, Tao Jiang, Xiaolin Wang. "Simulation of irradiation uniformity for polyethylene and polypropylene in various high energy fields", Radiation Physics and Chemistry, 2018 Publication	3%
3	S. Ahmadi, S. Ashrafi, F. Yazdansetad. "A method to calculate the gamma ray detection efficiency of a cylindrical NaI (Tl) crystal", Journal of Instrumentation, 2018 Publication	2%
4	baadalsg.inflibnet.ac.in Internet Source	2%
5	tel.archives-ouvertes.fr Internet Source	2%
6	www.scientific.net Internet Source	2%



fmipa.itb.ac.id

Internet Source

2%

Exclude quotes Off

Exclude matches < 2%

Exclude bibliography Off

B25

GRADEMARK REPORT

FINAL GRADE

GENERAL COMMENTS

/0

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5
