

# International Journal of Applied Engineering Research (IJAER)

Print ISSN 0973-4562

Online ISSN 0973-9769

Editor-in-Chief:

**Prof. Dr. Eng. Ali MERDJI,**


Faculty of Science and Technology,

Route de Mamounia,

University of Mascara,

B.P 305, Mascara (29000),

Algeria.

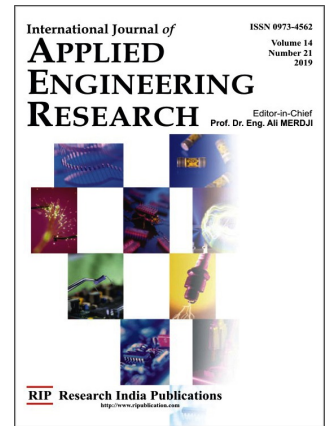

**Aims and Scope:** The *International Journal of Applied Engineering Research (IJAER)* is an international research journal, which publishes top-level work from all areas of Engineering Research and their application including Mechanical, Civil, Electrical, Computer Science and IT, Chemical, Electronics, Mathematics, Environmental, Education Geological etc. Researchers in all technology and engineering fields are encouraged to contribute articles based on recent research. Journal publishes research articles and reviews within the whole field of Engineering Research, and it will continue to provide information on the latest trends and developments in this ever-expanding subject.

**Audience:** Mechanical, computer, aeronautical, chemical, civil, electronics, mathematic, geology, electrical.

**Submission:** Authors are requested to submit their papers electronically to [IJAEReditor@gmail.com](mailto:IJAEReditor@gmail.com)

**INDEXING:** SCOPUS(2010-2017), EBSCOhost, GOOGLE Scholar, JournalSeek, J-Gate, ICI, Index Copernicus IC Value 82.67 and **UGC Approved Journal - 2017 (Journal No. - 64529)**

**Publication Date and Frequency:** Twelve issues per year.



# Source details

## International Journal of Applied Engineering Research

Scopus coverage years: 2009, from 2011 to 2018

(coverage discontinued in Scopus)

Publisher: Research India Publications

ISSN: 0973-4562 E-ISSN: 0973-9769

Subject area: Engineering: General Engineering

Source type: Journal

CiteScore 2016

0.2



SJR 2019

0.175



SNIP 2021

1.262



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)


[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

[Export content for category](#)

CiteScore rank 2016 In category: General Engineering

☆	Rank	Source title	CiteScore 2016	Percentile
☆	#237 269	International Journal of Applied Engineering Research	0.2	12th percentile
☆	#1	ACS Nano	22.8	99th percentile
☆	#2	Journal of Engineering Education	8.7	99th percentile
☆	#3	Expert Systems with Applications	8.2	99th percentile
☆	#4	Composites Science and Technology	7.9	98th percentile
☆	#5	Journal of Biophotonics	7.5	98th percentile
☆	#6	APL Materials	6.5	97th percentile
☆	#7	International Journal of Engineering Science	6.5	97th percentile
☆	#8	Technovation	6.2	97th percentile
☆	#9	Advanced Science	5.7	96th percentile
☆	#10	International Journal of Thermal Sciences	5.6	96th percentile
☆	#11	IEEE Transactions on Learning Technologies	5.6	96th percentile
☆	#12	Philosophical Transactions of the Royal Society A: Mathematical, Physical and Engineering Sciences	5.5	95th percentile
☆	#13	Computers in Industry	5.4	95th percentile
☆	#14	International Journal of Human Computer Studies	5.3	94th percentile
☆	#15	Design Studies	5.1	94th percentile

### CiteScore trend

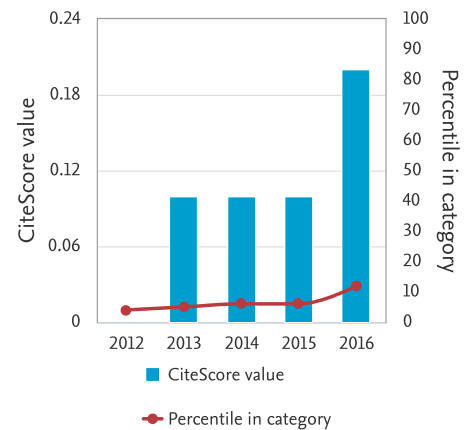

# International Journal of Applied Engineering Research (IJAER)

Volume 13, Number 01 (2018)

## *CONTENTS*

**[An Intelligent Robust Fuzzy Temperature Control of a Thermoelectric Cooler](#)**

pp. 1-7

M. S. Mohamed, M. G. Hassan and Ayman A. Aly

**[Influence of Viscosity on the Shape of an Air Taylor Bubble in a Stagnant Liquid under Laminar Condition in Falling Film Region](#)**

pp. 8-13

Saran Salakij and Boonchai Lertnuwat456

**[A Comparative Analysis of Diesel Engine Fuelled with Diesel Fuel and Methyl Ester of Waste Cooking Oil](#)**

pp. 14-20

Mohamed F. Al-dawody and Khaled A. Al-Farhany

**[Optimized Method for Sine and Cosine Hardware Implementation Generator, using CORDIC Algorithm](#)**

pp. 21-29

A. Ait Madi and A. Addaim

**[Experimental and Numerical Hydrodynamic Analysis of a Planing Hull Pleasure Boat](#)**

pp. 30-39

Filippo Cucinotta and Felice Sfravara

**[Mathematical Analysis of SVPWM for Inverter fed DTC of Induction motor Drive](#)**

pp. 47-52

V. Raveendra Reddy and V.C. Veera Reddy

**[Investigation of Hardness by Experimental and Simulation Studies on Al-12.5% Si Piston Alloys Reinforced by Cu Powder](#)**

pp. 53-58

Mohammed Azam Ali, V Vasudeva Rao and B Balu Naik

**[Health care System: Stream Machine Learning Classifier for features Prediction in Diabetes Therapy](#)**

pp. 59-65

D.Ramana kumar and S.Krishnamohan Rao

**[Concrete and Steel Strengths Effect on Deep Beams with Reinforced Struts](#)**

pp. 66-73

Khattab Saleem Abdul-Razzaq, Sarah F. Jebur and Abbas H. Mohammed

**[Speed Control of Induction Motor Drive Using Artificial Neural Networks- Levenberg-Marquardt Backpropagation Algorithm](#)**

**pp. 80-85**

**V. Raveendra Reddy, V.C. Veera Reddy and V.Chandra Jagan Mohan**

**[Self-Adaptive Differential Evolution based Localization of Sensors in Wireless Sensor Network](#)**

**pp. 86-90**

**S.R. Sujatha and M. Siddappa**

**[Facility Location Problems in the Presence of Mixed Forbidden Regions](#)**

**pp. 91-97**

**M. Anil Prakash, K.V.L. Raju and V Ramachandra Raju**

**[Detection, Classification and Localization of Faults of Transmission Lines using Wavelet Transform and Neural Network](#)**

**pp. 98-106**

**Nilish.S.Wani, R. P. Singh and Milind. U. Nemade**

**[Security Attacks and Energy Efficiency in Wireless Sensor Networks: A Survey](#)**

**pp. 107-112**

**Anil S Naik and R. Murugan**

**[BER Performance Evaluation of 2X2, 3X3 and 4X4 Uncoded and Coded Space Time Block Coded \(STBC\) MIMO System Concatenated with MPSK in Rayleigh Channel](#)**

**pp. 113-117**

**Madhavi H. Belsare and Pradeep B. Mane**

**[Design of a Compact Dual Band Patch Antenna with Enhanced Bandwidth on Modified Ground Plane](#)**

**pp. 118-122**

**Anitha P, A.S R Reddy and M N Giri Prasad**

**[Experimental Analysis of a Square Duct Solar Air Heater with Radiation Reflectors](#)**

**pp. 123-130**

**Raktimjyoti Parashar, Saksham Pandey, Vishesh Hasija and K. Vasudeva Karanth**

**[An Automated MapReduce Framework for Crime Classification of News Articles Using MongoDB](#)**

**pp. 131-136**

**K.Santhiya and V.Bhuvaneshwari**

**[Production of Heavy Fuel Oil Fly Ash \(HFO\)-based Geopolymers for Passive Cooling Systems](#)**

**pp. 137-143**

**Mazen Alshaaer, Tarek Fahmy, Mohammed Shqair and Juma'a Al-Kafawein**

**[Comparative Study of MLH and SAM Classification Techniques using Multispectral Data of EO-1 Satellite](#)**

**pp. 144-149**

**Arpita Baronia, Sujan Singh Niranjana, Jyoti Sarup and P.K.Jain**

**[Active and Reactive Power Control of Single Phase Transformerless Grid Connected Inverter for Distributed Generation System](#)**

**pp. 150-157**

**Beena V, Jayaraju M and Sebin Davis K**

**[Classification and Mapping of Land Use Land Cover change in Kanyakumari district with Remote Sensing and GIS techniques](#)**

pp. 158-166

S.L.Senthil Lekha and S. S. Kumar

**[Performance Study and Mathematical Model of Aerospace Geared Rotary Actuators](#)**

pp. 167-174

Alessandro Bertucci, Giovanni Jacazio and Massimo Sorli

**[The Impact of Dynamic Scaling on Energy Consumption at Node Level in Wireless Sensor Networks](#)**

pp. 175-188

Rajan Sharma and Balwinder Singh Sohi

**[A Sender Initiated Dynamic and Decentralized Load Balancing algorithm for Computational Grid Environment Using Variable CPU Usage](#)**

pp. 189-194

R. C. Dharmik and S. R. Sathe

**[An Innovative Counting Sort Algorithm for Negative Numbers](#)**

pp. 195-201

Siddharth Srivastava, Umesh Chandra Jaiswal and Shachi Mall

**[Survey: Machine Translation for Indian Language](#)**

pp. 202-209

Shachi Mall and Umesh Chandra Jaiswal

**[A Comparative Performance Analysis for loss Minimization of Induction Motor Drive Based on Soft Computing Techniques](#)**

pp. 210-225

Keerti Rai, S B L Seksena and A N Thakur

**[Invariants for detecting changes in a system of linear processes](#)**

pp. 226-232

Sung Myung

**[Energy Efficient Routing Strategy for Automated Irrigation](#)**

pp. 233-237

Ashwini.S and Deepa.V. Jose

**[Prediction of Hotspot Location in a Power Transformer Considering Stray Losses using FEM](#)**

pp. 238-244

J. Mahesh Yadav and A. Srinivasula Reddy

**[Development of Iron Doped Manganese oxide \(Mn<sub>2-x</sub>Fe<sub>x</sub>O<sub>3</sub>\) Catalysts for Soot Oxidation Applications](#)**

pp. 245-251

Satya Deepika Neelapala, Abhishek Shetty, Gaurav Gaggar, Rajat Mall and Harshini Dasari

**[Object Tracking using Orthogonal Learning Particle Swarm Optimization \(OLPSO\)](#)**

pp. 252-261

Madhavi Gajula and A. Jhansi Rani

**[Design and Analysis of Adjustable Constant Current Source with Multi Frequency for Measurement of Bioelectrical Impedance](#)**

pp. 262-267

Charu Pawar, Munna Khan and J.P. Saini

**[A Survey on Key management Schemes in Wireless Ad Hoc Networks](#)**

pp. 268-272

Pooja Singh and Nasib Singh Gill

**[Masking Based Demosaicking for Image Enhancement Using Plenoptic Camera](#)**

pp. 273-276

Hyunji Cho and Hoon Yoo

**[Compositional Feature Subset Based Ranking System \(CFBRS\) for Learning to Rank with User Feedback](#)**

pp. 277-290

Mohd Wazih Ahmad, M.N.Doja and Tanvir Ahmad

**[Improved Region of Interest \(I-ROI\) Based Segmentation for Contrast Enhancement in Satellite Images](#)**

pp. 291-297

S. Maheshwari and P. Krishna Priya

**[A Defect Tolerance Scheme for Nanoscale Crossbar Memory](#)**

pp. 298-303

Yoon-Hwa Choi

**[Counterfeit Bill Detection Algorithm using Deep Learning](#)**

pp. 304-310

Soo-Hyeon Lee and Hae-Yeoun Lee

**[A Method to Improve Exergtic Efficiency of Power Plant Cycle by Heat Pipes](#)**

pp. 311-317

T. Mallikharjuna Rao and S.S. Rao

**[Lung Cancer Prediction using Feed Forward Back Propagation Neural Networks with Optimal Features](#)**

pp. 318-325

S. Senthil and B. Ayshwarya

**[Stage-Discharge Relationship Modeling Using Data Mining Techniques in an Arid Region](#)**

pp. 326-336

Ali H. Al-Aboodi, Husham T. Ibrahim and Wisam S. Al-Rekabi

**[Energy Efficient Clustering for Lifetime Maximization and Routing in WSN](#)**

pp. 337-343

K. Johny Elma and S. Meenakshi

**[Implementing the Imprint in Robot by Calculating Probabilities](#)**

pp. 344-349

Rodolfo Romero Herrera, Manuel Mejía Perales and Francisco Gallegos Funes

**[Hypertension Heart Disease Heart Rate Time Series Classification using Reshape](#)**

[\*\*Detrended Fluctuation Analysis\*\*](#)

pp. 350-357

Rifki Wijaya, Tati Latifah Erawati Rajab, Ary Setijadi Prihatmanto and Richard Karel Willem Mengko

[\*\*Design of Robust Chattering free Integral Sliding Mode Controller for Dual Input Buck Boost Converter\*\*](#)

pp. 358-365

Lisy E.R., M. Nandakumar, Anasraj R. and Ramesh Kumar P.

[\*\*Numerical Solution for the time-fractional Fokker-Planck equation Using Fractional Power Series Method and The shifted Chebyshev polynomials of the third kind\*\*](#)

pp. 366-374

A.M.S. Mahdy and G.M.A. Marai

[\*\*The Era of Expeditious NanoRAM-Based Computers \(Enhancement of Operating System Performance in Nanotechnology Environment\)\*\*](#)

pp. 375-384

Mona Nabil ElGohary, Hala Abdel-Galil, Wessam ElBehaidy and Mostafa-Sami M. Mostafa

[\*\*Design of Robust H \$\infty\$  Controller for a Realistic PMDC Motor with GA Based Performance Optimization\*\*](#)

pp. 385-393

Prasanth Venkatareddy and Subhash Kulkarni

[\*\*Software Defect Prediction using Adaptive Neuro Fuzzy Inference System\*\*](#)

pp. 394-397

Satya Srinivas Maddipati, G Pradeepini and A Yesubabu

[\*\*Line-Adaptive Color Transforms for Lossless Frame Memory Compression\*\*](#)

pp. 398-402

Joungeun Bae and Hoon Yoo

[\*\*A LabView Monitored Smart Solar Lighting System for the Streets and Highways in Oman\*\*](#)

pp. 403-410

Manaf Zghaibeh, Omer F. Khan, Amina Kashoobv, Zainab Albalushi and Noof Albalushi

[\*\*Effect of Overlapping Ratio, Blade Shape Factor, and Blade Arc Angle to modified Rotor Savonius performances\*\*](#)

pp. 411-416

Ida Bagus Alit, Ida Ayu Sri Andyani and Mirmanto

[\*\*Impact Resistance of Sustainable Oil Palm Shell Light Weight Rubbercrete Reinforced with Wire Mesh\*\*](#)

pp. 417-425

Agusril Syamsir, Zakaria Che Muda, Salmia Beddu, Nur Liyana Kamal, Daud Mohamad, Vivi Anggraini and Stefan Ulrich Grün

[\*\*Assessment of the Correlation between the Quality of Building Materials and Strength of Concrete Members in the Building\*\*](#)

pp. 426-433

Ogunde Ayodeji Olubunmi, Egbanubi Kehinde Comfort, Ameh John Oko and Joshua Opeyemi

# Effect of Overlapping Ratio, Blade Shape Factor, and Blade Arc Angle to modified Rotor Savonius performances

**Ida Bagus Alit\***

*Mechanical Engineering Department,  
Engineering Faculty, Mataram University, Mataram, Indonesia.  
\*Corresponding author  
Orcid Id: 0000-0002-2444-8972*

**Ida Ayu Sri Andyani**

*Electrical Engineering Department,  
Engineering Faculty, Mataram University, Mataram, Indonesia.*

*Orcid Id: 0000-0001-8806-4006*

**Mirmanto**

*Mechanical Engineering Department  
Engineering Faculty, Mataram University, Mataram, Indonesia.*

*Orcid Id: 0000-0002-3774-0489*


## Abstract

Savonius rotor has many advantages over other types of the rotor, such as simple construction, cheap, not dependent on the direction of the wind, and has good initial torque at low wind speeds. The Savonius rotor efficiency is strongly influenced by its geometric shape; therefore this study examines the effect of geometric shapes expressed by dimensionless numbers including overlapping ratios, blade shape factors, and blade arc angles. The results show that if the overlap ratio increases then the coefficient of rotor power decreases. Nevertheless, the best performance was obtained by the rotor configuration constructing of an overlap ratio 0.0, a blade shape factor of 0.5 and an angle arc of  $110^\circ$ .

**Keywords:** Savonius rotor; overlap ratio; blade shape factor; blade arc angle

## INTRODUCTION

The existence of vertical axis wind turbine (VAWT) becomes a new phenomenon in the development of wind technology. The advantages of VAWT that are not owned by horizontal wind turbine shafts (HAWT) give high interest to the researchers to conduct further study on this type of wind turbine. The Savonius turbine is one type of vertical wind turbine shaft. This turbine has many advantages over other types of turbines, such as: having a simple construction, low cost, not influenced by wind direction, and the generator can be placed under the tower. The operation of the Savonius turbine is particularly suitable for low wind speeds, Dhote [1]. This turbine spins because of the drag force which is the difference between the positive and negative moments that occur on each blade. The Savonius turbine usually consists of two or three blades, when viewed from above it looks like the letter S, Ali [2], see Figure 1.

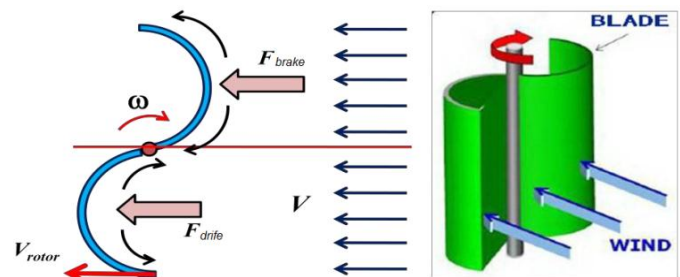

**Figure 1.** Force scheme on two blade Savonius turbine

Several studies have been undertaken to improve the performance of this turbine, such as the study of the effect of the number of blades, the use of rotor caps, and the overlap ratio of Savonius turbines on performance. The number of blades found is 2, 3, and 4, whereas the ratio of overlapping variations is 0.0, 0.2, 0.25, 0.3, and 0.35. The result is that two blade Savonius rotor is more efficient than 3 or 4 blades. Moreover, the use of the rotor cap produces greater efficiency than without the rotor cap. The rotor without overlap ratio has a higher power coefficient than that with overlap ratios, Mahmoud et al. [3]. Rus [4] added a concentrator on the Savonius shaft to improve turbine performance. The concentrators were added with the aim of reducing the negative moments that occur on the blades. A similar study was conducted by Alit et al. [5]. They studied effects of adding concentrators on the performance of Savonius turbines. They concluded that adding the concentrator could increase the power coefficient.

Investigation on improving the Savonius turbine performance by modifying the rotor has been also done, e.g. Vaishali et al. [6]. They modified the blade by adding an arm. They tested their turbine at the wind velocities of 2 m/s to 8 m/s. Their Savonius rotor used 3 blades and on each blade they installed



arms. They predicted the power resulted by their turbine using theoretical analysis and computational software. Widodo et al. [7] designed and analyzed the Savonius turbine with the power of 5 kW. The designed Savonius turbine had a diameter of 3.5 m and a height of 7 m. The blade model was designed using SolidWorks software and analyzed with fluid dynamic calculation. They found the maximum and minimum pressures of 101.51 kPa and 101.89 kPa, with the maximum deformation of the blade of 2.94 mm. From the analysis, they concluded that the Savonius rotor was safe enough to withstand aerodynamic forces in the turbine.

Deb et al. [8] examined the Savonius axis with a height of 60 cm and a diameter of 17 cm. The rotor model was helical Savonius with the blade twisted a 45°. Their results were compared to the conventional Savonius shaft. The similar work was also done by Damak et al. [9]. They rotated the blades at the angle of 180° with variations of the Reynolds number and overlap ratio. The results showed that twisting angles of 45° and 180° produced better performances. Gad et al. [10] conducted numerical studies using fluent software for modification of the Savonius V-blade turbine and polynomial blades. The revealed the polynomial beam resulted in the best performance.

Based on the above literature review, the aim of the research is to know the effect of overlap ratio, blade shape factor, and blade arc angle on the modified Savonius turbine performance.

### EXPERIMENTAL SET UP



Modified Savonius rotor was tested in a wind tunnel with square nozzles, with the tunnel size of 450 mm x 405 mm x 1000 mm, see Figure 2. The air was flowed using a common commercial fan. Testing was done with wind speeds ranging from 2 m/s to 5 m/s. The wind speeds were measured using an anemometer JL-FS2 with a resolution of 0.1 m/s.




**Figure 2.** The schematic diagram of the experimental set up

Meanwhile, the rotational speeds of the rotor were measured with a digital laser tachometer model DT-2234C. The PMG 165-0.05 kW 300 rpm DC type generator was placed on the turbine shaft as the load of the Savonius turbine. The current and voltage outputs of the generator were measured by a digital multimeter model DT-9205A.


Figures 3 - 5 indicate the modified Savonius turbine examined to know the effect of rotor geometries.

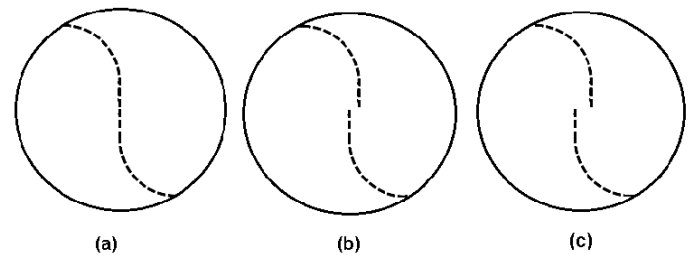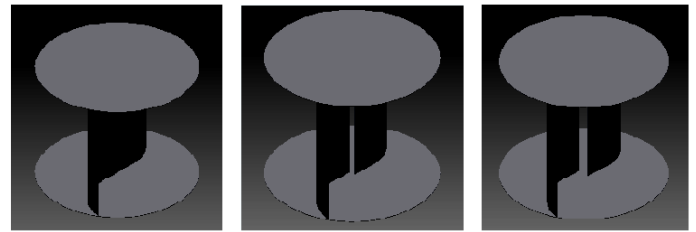

**Figure 3.** Overlap ratio variations; (a) 0.0, (b) 0.05, (c) 0.10

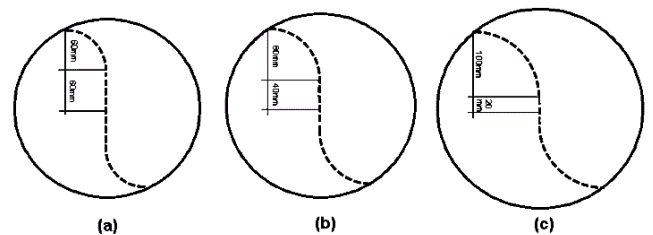


**Figure 4.** Blade shape factor variations; (a) 1.0, (b) 0.5, (c) 0.2

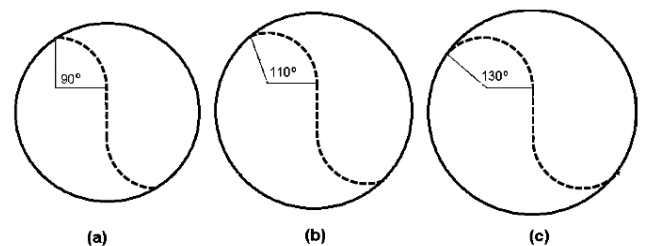

**Figure 5.** Blade arc angle variations, (a) 90°, (b) 110°, (c) 130°

Modified Rotor Savonius. The geometric parameters of the Savonius rotor tested include aspect ratio ( $H/D$ ), overlap ratio ( $m/D$ ), blade arc angle ( $\Psi$ ) and blade shape factor ( $p/q$ ).

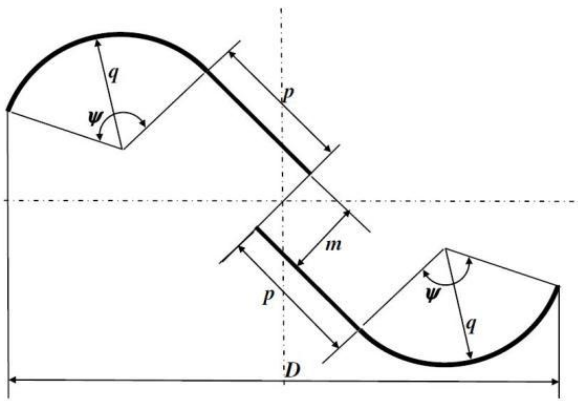

**Figure 6.** Modification basic concept of the Savonius rotor [11]

$$\text{Aspect ratio} = \frac{H}{D} \quad (1)$$

$$\text{Overlap ratio} = \frac{m}{D} \quad (2)$$

$$\text{Blade shape factor} = \frac{p}{q} \quad (3)$$

See Figure Where  $H$  is the rotor height (m),  $D$  indicates the rotor diameter (m),  $m$  is the overlapping gap (m),  $p$  is the arm length (m) and  $q$  is the blade radius (m).

Theoretically, the energy resulted by the wind turbine is a function of wind speed, air density, and swept area and formulated as [12]:

$$P_r = \frac{1}{2} \rho A_s C_p v^3 \quad (4)$$


$$A_s = HD \quad (5)$$

Where  $P_r$  is the wind power over the swept area (W),  $\rho$  represents the air density ( $\text{kg/m}^3$ ),  $A_s$  is the swept area ( $\text{m}^2$ ),  $C_p$  is the power coefficient, and  $v$  is the wind speed (m/s).

The performance of the wind turbine is shown by the magnitude of the speed ratio tip to the power coefficient. Tip speed ratio ( $t_{sr}$ ) is the ratio of rotor tip speed to wind speed. The speed of the rotor tip has a nominal value that varies according to the wind speed. The matrices of  $T_{sr}$  can be calculated by the equation:


$$t_{sr} = \frac{\pi D n}{60 v} \quad (6)$$

Where  $n$  is the rotation speed (rpm). Each turbine rotor has different power coefficients on each speed ratio tip. Figure 7 shows the relationship of speed ratio tip with power coefficient for various turbine rotors.

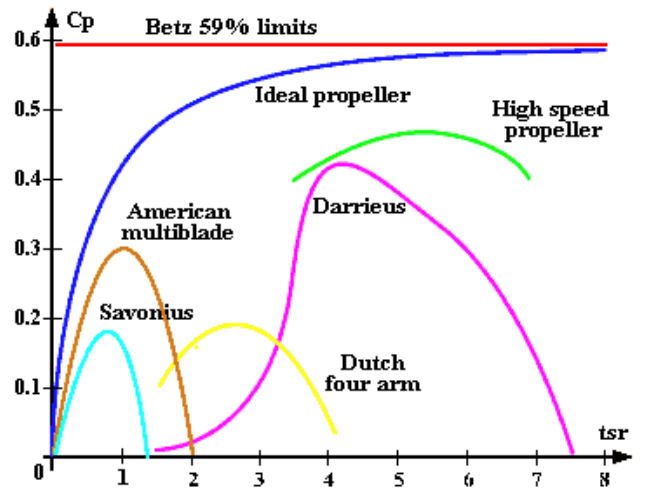

**Figure 7.**  $C_p$ - $t_{sr}$  diagram for several turbine types [5, 13]

Modified Savonius rotor does not use a shaft between two plates (without central shaft between the two end plates). However, it uses two closing plates as the blade holder and these two closing plates can increase the turbine efficiency, [14]. The Savonius rotor in the study is made of the acrylic material with a thickness of 3 mm. At the top and bottom are covered with circular acrylic sheets according to the size of the rotor diameter. Parameters presented include the influence of overlap ratio, blade shape factor, and blade arc angle to turbine performance.

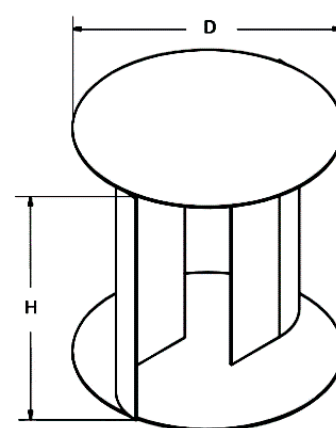

**Figure 8.** Modified Savonius rotor with two closing plates without a shaft between blades

Table 1. Configuration of the modified Savonius rotor

Overlap ratio ( $m/D$ )	Blade shape factor ( $p/q$ )	Blade arc angel ( $\Psi$ )
0.0, 0.05, 0.1	0.5	$90^\circ$
0.0	0.2, 0.5, 1.0	$90^\circ$
0.0	1.0	$90^\circ, 110^\circ, 130^\circ$

## RESULTS AND DISCUSSION

The power coefficient is a function of the rotor shape and wind speed. The shape of modified Savonius rotor of this study is expressed in dimensionless numbers, including aspect ratio, overlap ratio, blade shape factor and blade arc angle. Some configurations were tested experimentally to get the optimum shape. Test results are presented through the relation of wind speed to the rotational speed of the shaft and tip speed ratio to power coefficient.

### A. Effect of overlap ratio

The first test was performed on the overlap ratio variation. The rotor being tested has a blade shape factor of 0.5 and a blade arc angle  $90^\circ$ . The variations of the overlap ratio tested are 0.0, 0.05, and 0.10.

As seen in figure 9, increasing the wind speed raises the rotor rotation. This occurs for all overlap ratios. However, at the same wind speed, the rotor with the overlap ratio of 0.0 or without overlap ratio shows giving the better rotor rotations. In figure 10, it can be seen that raising the tip speed ratio elevates the power coefficient, however, at the tip speed ratios of more than 7, the power coefficient seems to be constant or even decreases. This finding was also found by Sharma et al. [15]. At the same tip speed ratio, the rotor without the overlap ratio presents the better power coefficients. The increased rotor rotation is due to the increase in the wind momentum pounding the turbine blades. The modified Savonius rotor without an overlap ratio yields the best performance. This finding was also found by Mahmoud et al. [3] and Kamoji et al. [11].

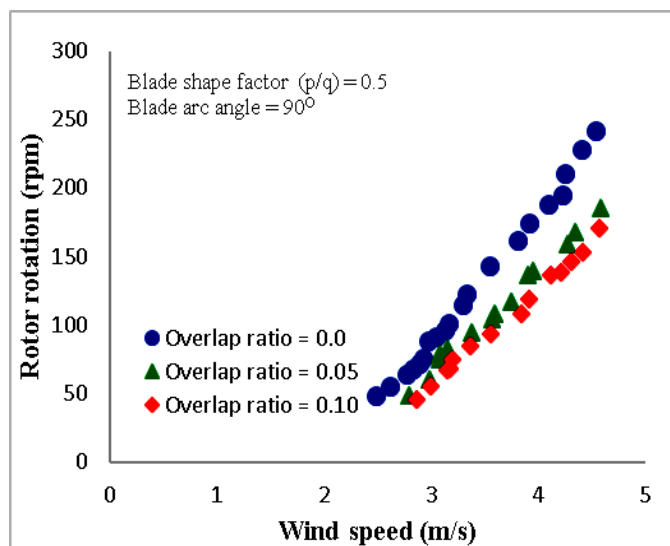


Figure 9. Effect of the overlap ratio on the rotor rotation speed

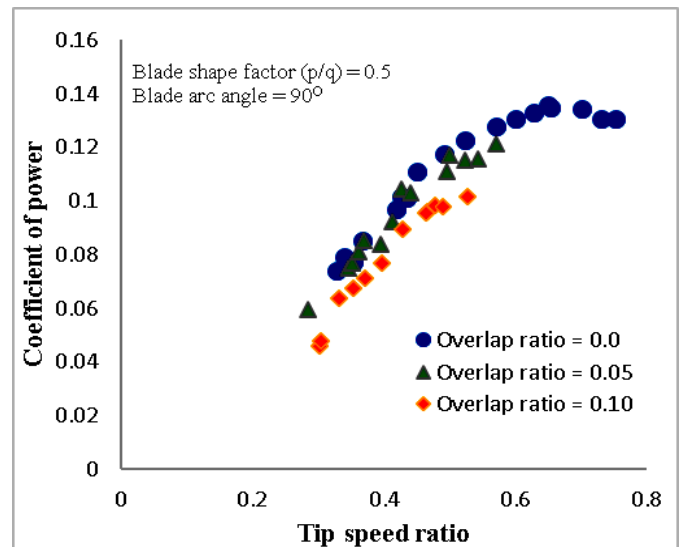


Figure 10. Effect of overlap ratio on power coefficient

### B. Effect of blade shape factor

The second test looks for the effect of blade shape factor on turbine performance. The modified Savonius rotor is constructed with an overlap ratio 0.0, and a blade arc angle  $90^\circ$ . Variations of the blade shape factor tested were 0.2, 0.5, and 1.0.

The effect of wind velocity on the rotation of the rotor is clear, as the wind velocity increases the rotor rotation also increases. Nevertheless, at the same wind velocity, the effect of blade shape factor seems not clear, see figure 11. However, the blade shape factor 0.5 indicates giving better rotor rotations. Similarly, increasing the tip speed ratio increases the power coefficient for all blade shape factors, however, the blade shape factor 0.5 shows resulting in the higher power coefficient, see figure 12. Hence, the blade shape factor 0.5 produces higher rotor rotation and power coefficient than that of the blade shape factor 0.2 and 1.0. Therefore, the modified Savonius rotor with blade shape factor 0.5 has better performance than other blade shape factors.

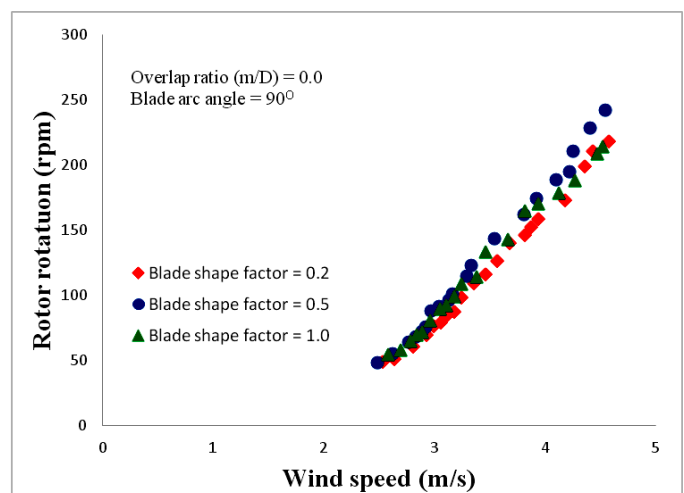


Figure 11. Effect of blade shape factor on rotor rotation

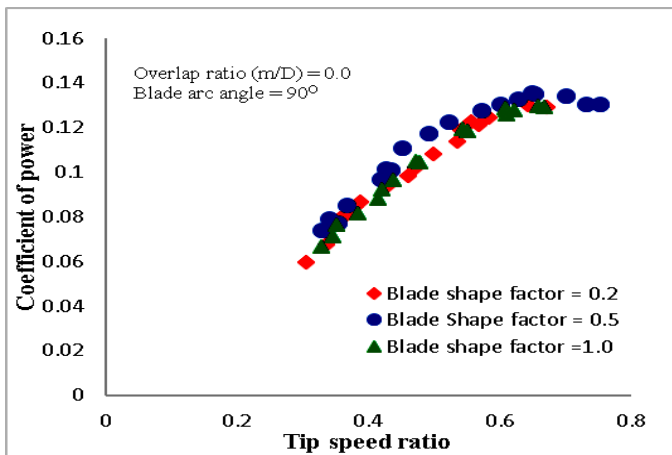


Figure 12. Effect of blade shape factor on power coefficient

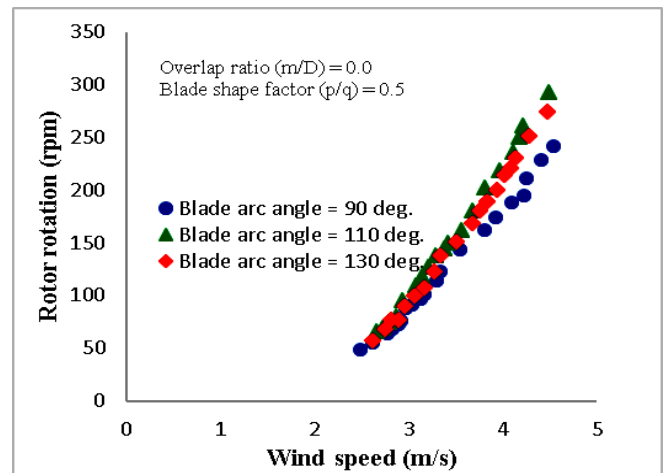


Figure 13. Effect of blade arc angle on the rotor rotation

### C. Effect of blade arc angle

The third test of this research is to find the influence of the blade arc angle to turbine performances. The modified Savonius rotor is constructed with an aspect ratio of 1.0, an overlap ratio of 0.0, and a blade shape factor of 0.5. Variations of the blade arc angle tested were 90°, 110°, and 130°. The effect of wind speed on the rotation of the rotor and the influence of the tip speed ratio on the power coefficient for the three variations of the blade arc angle are shown in Figures 13 and 14. As the wind speed increases, the rotor rotation increases too for the three different blade arc angles. At the wind speeds of lower than 2.5 m/s, the effect of the blade arc angle is not significant, while at the wind speeds of more than 2.5 m/s, the blade arc angles affect the rotor rotation. In term of tip speed ratio, at the tip speed ratios less than 0.5, the blade arc angle does not affect the power coefficient, but at the tip speed ratios of more than 0.5 the effect of the blade arc angle is clear. At the tip speeds less than 0.7, the power coefficient increases with the tip speed ratio, while at the tip speed ratios more than 0.7, the power coefficient seems to decrease with the increase in the tip speed ratio. This finding agrees well with Figure 7 showing the relationship between tip speed ratio and power coefficient. Nevertheless, the rotor with the blade arc angle of 110° has a higher power coefficient than that of other blade arc angles. Kamoji et al. [11] found that the best blade arc angle was 124°. The results of this study in term of blade arc angle agree with that of Kamoji et al. [11] at the blade arc angles laying between 90° to 130°. Nevertheless, this study did not investigate the blade arc angle of 124°, but 110°. Kamoji et al. [11] used tip speed ratios of above 0.6, while in this study the tip ratios employed were less than 0.8.

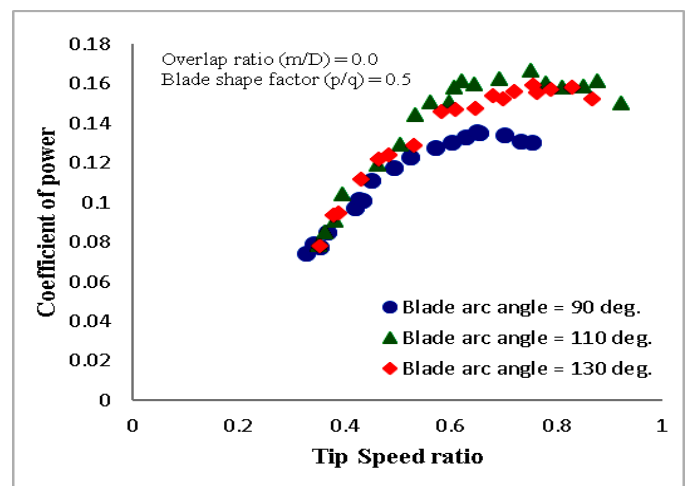


Figure 14. Effect of blade arc angle on the power coefficient

## CONCLUSION

The performance of the turbine is strongly influenced by the wind speed and the geometrical shape of the modified Savonius rotor. Turbine performance can be seen from the amount of power coefficient generated. The magnitude of the power coefficient is a function of the tip speed ratio and rotor geometries. These geometries include aspect ratio, overlap ratio, blade shape factor and blade arc angle. The modified Savonius rotor without the overlap ratio has the best performance. Increasing values of the overlap ratio result in the decreased power coefficient. The best performance of the rotor configuration studied has an overlap ratio of 0.0 (without overlap ratio), a blade shape factor of 0.5, and a blade arc angle of 110°.

## ACKNOWLEDGMENT

The research was funded entirely by the Ministry of Research, Technology and Higher Education through a grant of applied products with SP DIPA-042.06.1.401516 / 2017 contract number.

## REFERENCES

- [1] A. Dhote, "Design, analysis and fabrication of Savonius vertical axis wind turbine", International Research Journal of Engineering and Technology, Vol.2, No.3, pp. 2048-2054, 2015.
- [2] M.A. Ali, "Experimental comparison study for Savonius wind turbine of two & three blades at low wind speed", International Journal Modern Research IJMER, Vol. 3, No. 5, pp. 2978-2986, 2013.
- [3] N.H. Mahmoud, A.A. Haroun, E. Wahba, E., and M.H. Nasef, "An experimental study on improvement of Savonius rotor performance", Alexandria Engineering Journal, Vol. 51, pp. 19-25, 2012.
- [4] L.F. Rus, "Experimental study on the increase of the efficiency of vertical wind turbines by equipping them with wind concentrators", Journal Sustainable Energy, Vol. 3, No. 1, pp. 30-35, 2012.
- [5] I.B. Alit, R. Susanto, I.M. Mara, and Mirmanto, " Effect of concentrator, blade diameter and blade number on the Savonius wind turbine performance", Asian Journal Applied Sciences, Vol.5, No.2, pp.343-351, 2016.
- [6] A. Vaishali, A.P. Swati, and A.G. Thakur, "Optimization of Savonius rotor for wind turbine", International Journal of Advances in Engineering & Technology, Vol.7, No.4, pp.1294-1299, 2014.
- [7] Widodo, W.S. Chin, H. Sihombing, and M.Y. Yuhasri, "Design and analysis of 5 KW Savonius rotor blade", Global Engineers Technologists Review, Vol.2, No.8, 2012.
- [8] B. Deb, R. Gupta, and R.D. Misra, "Performance analysis of a helical Savonius rotor without shape at 45° twist angle using CFD", Journal of Urban and Environmental Engineering, Vol.7, No.1, pp.126-133, 2013.
- [9] A. Damak, Z. Driss, and M.S. Abid, "Experimental investigation of helical Savonius rotor with a twist of 180°", Renewable Energy, pp.136-142, 2013.
- [10] H.E. Ged, A.A. El-Hamid, W.A. El-Askary, and M.H. Nasef, "A new design of Savonius wind turbine: numerical study", CFD Letters, Vol.6, No.4, pp.144-158, 2014.
- [11] M.A. Kamoji, S.B. Kedare, and S.V. Prabhu, "Experimental investigation on single stage modified Savonius rotor", Applied Energy, Vol. 86, pp. 1064-1073, 2009.
- [12] S.C. Balineni, S.R. Krishna, B.S. Kumar, and G.V. Kumar, "Design and fabrication of Savonius vertical axis wind turbine", Department of Mechanical Engineering Gokaraju Rangaraju Institute of Engineering and Technology, Jawaharlal Nehru Technological University, 2011.
- [13] C.R. Patel, V.K. Patel, S.V. Prabhu, and T.I. Eldho, "Investigation of overlap ratio for Savonius type vertical axis hydro turbine", Int. J. Soft Computing and Engineering (IJSCE), Vol. 3, No. 2, pp. 379-383, 2013.
- [14] A.A. Kadam, and S.S. Patil, "A review study on Savonius wind rotors for accessing the power performance", IOSR Journal of Mechanical and Civil Engineering, pp.18-24, 2013.
- [15] K.K. Sharma, R. Gupta, and A. Biswas, "Performance measurement of two-stage two-bladed Savonius rotor", Int. J. Renewable Energy Research, Vol. 4, No. 1, pp. 115-121.