

[Home > Vol 18, No 2 \(2022\)](#)

## Teknika: Jurnal Sains dan Teknologi

**Teknika: Jurnal Sains dan Teknologi** is a double-blind-peer-review journal in the fields of engineering, applied science, and technology, including civil engineering, mechanical engineering, industrial engineering, chemical engineering, metallurgical engineering, electrical engineering, and material science. **Teknika: Jurnal Sains dan Teknologi** is published by Faculty of Engineering Universitas Sultan Ageng Tirtayasa in collaboration with Forum Teknik, Badan Kerja Sama Perguruan Tinggi Negeri (BKS-PTN) Wilayah Barat/Engineering Forum of Western Indonesian Government Universities Board with MoA No.127/UN43.3/KS/2017.

**Teknika: Jurnal Sains dan Teknologi** has been accredited by Ministry of Research, Technology, and Higher Education of Republic of Indonesia since Vol. 14, No. 1, 2018 until Vol. 15, No. 1, 2019 with grade 5th according to the decree No. B/3351/E5/E5.2.1/2019, recredited with 4th grade since Vol. 15 No. 2, 2019 until Vol. 16 No. 1, 2020 according to the decree No. B/804/E5/E5.2.1/2019, and recredited with 3th grade since Vol. 16 No. 2, 2020 until Vol. 21 No. 1, 2025 according to the decree No. 0385/E5.3/KI.02.00/2022. **Teknika: Jurnal Sains dan Teknologi** has become a CrossRef Member since 2018 with prefix 10.36055. **Teknika: Jurnal Sains dan Teknologi** publishes its journal issues in **June** and **November**. The first print version of Teknika has been published in 2004, while the first online version has been published in 2011. **Teknika: Jurnal Sains dan Teknologi** has **P-ISSN: 1693-024X** (print version) and **E-ISSN: 2654-4113** (online version).

To improve the quality of articles, The Editorial Boards have made several changes in the article template and the journal cover. This change will hopefully make the articles easier to read, to refer, or to cite. The new template will effectively be applied in 2019 Vol. 15, No. 2. To find out the templates and the covers, download here: old article template, old cover, new template, and new cover. **Teknika: Jurnal Sains dan Teknologi** has been indexed by Index Copernicus International (ICI) with Index Copernicus Value (ICV) 2019 : 80.83, Index Copernicus Value (ICV) 2020 : 82.71, and Index Copernicus Value (ICV) 2021 : 100.00.

We accept submissions from all over the world. Our Editorial Board members are prominent and active international researchers in engineering and technology fields who ensure efficient, fair, and constructive peer-reviewed processes. All accepted articles will be published on a **article publishing charge** and will be freely available to all readers with worldwide visibility and coverage.



### Syarif Abdullah, M.Si.

Editor in Chief  
Teknika: Jurnal Sains dan teknologi  
Faculty of Engineering, Universitas Sultan Ageng Tirtayasa  
Cilegon Banten 42435, Indonesia

[SUBMIT](#)

## Announcements

Accreditation from Arjuna, Ministry of Education, Culture, Research, and Technology

[Online Submission](#)

### MENU

- [Focus and Scope](#)
- [Copyright Notice](#)
- [Publication Ethics](#)
- [Editorial Boards](#)
- [Peer Reviewers](#)
- [Peer Review Process](#)
- [Author Guidelines](#)
- [Digital Archiving](#)
- [Open Access Policy](#)
- [Plagiarism Policy](#)
- [Retraction Policy](#)
- [Archiving](#)
- [Author Fees](#)
- [Indexing](#)
- [Contact Us](#)
- [Publisher](#)

### ARTICLE TEMPLATE



### JOURNAL STORIES

### USER

- You are logged in as...
- » My Journals
  - » My Profile
  - » Log Out

### RECOMMENDED TOOLS



Posted: 2022-06-26

[More Announcements...](#)

Vol 18, No 2 (2022): Available Online in November 2022

## Table of Contents

## Original Research Article

<b>Proposed production process improvement with a lean manufacturing approach on the electrolytic tinning line</b> <i>Evi Febianti, Ade Irman S Mutaqin, Firdha Tamia Puteri, Shanti Kirana Anggraeni, Nuraida Wahyuni, Ratna Ekawati, Ani Umyati</i>	PDF 86-93
<b>Utilization of fly ash and bottom ash to increase the value of unconfined compression strength on subgrade</b> <i>Woelandari Fathonah, Rama Indera Kusuma, Enden Mina, Restu Wigati, Dwi Esti Intari, Nada Shafa Soraya Gandakusumah</i>	PDF 94-101
<b>Toxicity and molecular docking approach phenolic extract of <i>Crescentia cujete</i> L against the enzymes glutathione peroxidase and cathepsin K</b> <i>Herayati Herayati, Agus Rochmat, Lia Nurliana, Meri Yulvianti, Yeyen Maryani, Ahmad Hariri, Suaedah Suaedah</i>	PDF 102-110
<b>Clean water projection of Serang City, Banten Province</b> <i>Restu Wigati, Woelandari Fathonah, Hendrian Budi Bagus Kuncoro, Heri Mulyono</i>	PDF 111-118
<b>Degradation of methyl ester sulfonate using TiO<sub>2</sub> photocatalyst</b> <i>Muhammad Triyogo Adiwibowo, Ahmad Sukarya, Fauzi Ramdani Aryanto Putra, Marta Pramudita, Rudi Hartono, Alia Badra Pitaloka</i>	PDF 119-123
<b>Effect of ultraviolet exposure and palm fibre/fibreglass direction on composite</b> <i>Tri Partuti, Muhammad Iqbal Bariq, Yanyan Dwiyanti, Adhitya Trenggono, Erlina Yustanti</i>	PDF 124-130
<b>Effect of maleic anhydride compatibilizer addition on mechanical properties of polylactic acid (PLA)/cellulose acetate (CA) composites film</b> <i>Abdul Kholiq, Ika Jumantika, Achmad Syarafuddin As-syirazi, Rahmayetty Rahmayetty</i>	PDF 131-135
<b>Early detection of sick chicken using artificial intelligence</b> <i>Widyawati Widyawati, Waliadi Gunawan</i>	PDF 136-141
<b>Analysis of magnetic field magnitude under the extra-high-voltage airway (SUTET) with route of Cilegon - Cibinong</b> <i>Retno Hadi Winoto, Jayanudin Jayanudin, Nuryoto Nuryoto</i>	PDF 142-149
<b>The effect of steering tail fin on performance on double pillars hybrid vertical axis wind turbine (Sultan Wind Turbine V-4.5)</b> <i>Erwin Erwin, Slamet Wiyono, Muhammad Iqbal, Hilmy Maulana Yusuf</i>	PDF 150-157



Teknika: Jurnal Sains dan Teknologi is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.



## CITATION AND METADATA ANALYSIS

- » Scopus
- » Google Scholar
- » Wizdom
- » Dimensions

## ISSN BARCODE



e-ISSN



p-ISSN

## VISITORS

Since July 2019

[View My Stats](#)

## INFORMATION

- » For Readers
- » For Authors
- » For Librarians

## JOURNAL CONTENT

Search

Search Scope




Browse

- » By Issue
- » By Author
- » By Title
- » By Sections
- » By Identify Types
- » Other Journals
- » Categories

## NOTIFICATIONS

- » View
- » Subscribe

## CURRENT ISSUE





[HOME](#) [ABOUT](#) [LOGIN](#) [REGISTER](#) [CATEGORIES](#) [SEARCH](#) [CURRENT](#) [ARCHIVES](#) [ANNOUNCEMENTS](#)

Home > Archives > **Vol 18, No 1 (2022)**

## Vol 18, No 1 (2022)

Available Online in June 2022

DOI: <http://dx.doi.org/10.36055/tjst.v18i1>


### Table of Contents

#### Original Research Article

<b>Utilization of sawdust on the compressive strength of concrete with variations of cement</b> <i>Zulmahdi Darwis, Hendrian Budi Bagus Kuncoro, Axel Xavier Delpiero</i>	PDF 1-6
<b>Analysis of the relationship between land use change and potential inundation rob in The Cipunagara River Basin using machine learning algorithms on google earth engine</b> <i>Gurusu Gurusu, Hendra Achiar</i>	PDF 7-17
<b>Characteristics of fly ash geopolymer based on alkaline ratio of activators for building materials: A review</b> <i>I Dewa Made Alit Karyawan, Ratna Yuniarti, Hasyim Hasyim, Desi Widianty</i>	PDF 18-22
<b>The application of fuzzy FMEA and TOPSIS methods in agricultural supply chain risk management (Case Study: Kabupaten Paser)</b> <i>Ninda Nur Sabila, Anggriani Profita, Yudi Sukmono</i>	PDF 23-35
<b>The effect of ceramic shards waste material with the addition of variations of coconut fiber on compressive strength and UPV test in fiber concrete</b> <i>Yolanda Oktovina Nurul Huda, Pintor Tua Simatupang</i>	PDF 36-43
<b>Application of the automated teller machine (ATM) card digit validation algorithm as a credit card fraud detection system</b> <i>Khairul Muttaqin, Rudi Mulya</i>	PDF 44-48
<b>Effect of Bayah natural zeolite for purification of waste cooking oil as feedstock of alkyd resin</b> <i>Heri Heriyanto, Endang Suhendi, Nadya Fitri Asyuni, Ilham Kiki Shahila</i>	PDF 49-55
<b>Key success factors for lean six sigma implementation on Light Rail Transit Station construction project</b> <i>Ulfa Soraya, Albert Eddy Husin, Bernadette Detty Kusumardianadewi, I Putu Indra Prabawa</i>	PDF 56-65
<b>The effect of mild steel immersion time on synergistic corrosion inhibitor ability of terminalia catappa leaves extract</b> <i>Arief Rafik, Sri Agustina, Marta Pramudita</i>	PDF 66-70
<b>Application of AutoML Vision for palm identification at UIN Syarif Hidayatullah Jakarta</b> <i>Victor Amrizal, Hendra Bayu Suseno, Priyanti Priyanti</i>	PDF 71-76
<b>Analysis and determination of tofu production risk mitigation strategy using FMEA and AHP methods (Case study: UD XYZ)</b> <i>Anisa Dwi Aryani, Wahyuda Wahyuda, Suwardi Gunawan</i>	PDF 77-85

**Front Matter Teknika Volume 18 Number 1 June 2022** PDF

**Back Matter Teknika Volume 18 Number 1 June 2022** PDF



#### MENU

- [Focus and Scope](#)
- [Copyright Notice](#)
- [Publication Ethics](#)
- [Editorial Boards](#)
- [Peer Reviewers](#)
- [Peer Review Process](#)
- [Author Guidelines](#)
- [Digital Archiving](#)
- [Open Access Policy](#)
- [Plagiarism Policy](#)
- [Retraction Policy](#)
- [Archiving](#)
- [Author Fees](#)
- [Indexing](#)
- [Contact Us](#)
- [Publisher](#)

#### ARTICLE TEMPLATE



#### JOURNAL STORIES



#### USER

You are logged in as...

- » My Journals
- » My Profile
- » Log Out



Teknika: Jurnal Sains dan Teknologi is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.

RECOMMENDED TOOLS



CITATION AND METADATA ANALYSIS

- » Scopus
- » Google Scholar
- » WIZDOM
- » Dimensions

ISSN BARCODE



9 772654 411181


e-ISSN



1 693 0247

p-ISSN

VISITORS



Since July 2019

00250925

View My Stats

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

JOURNAL CONTENT

Search

Search Scope

All

Search

Browse

- » By Issue
- » By Author
- » By Title
- » By Sections
- » By Identify Types
- » Other Journals
- » Categories

NOTIFICATIONS

...

- » [View](#)
- » [Subscribe](#)

**CURRENT ISSUE**

<b>ATOM</b>	1.0
<b>RSS</b>	2.0
<b>RSS</b>	1.0

---



Home > About the Journal > **Editorial Team**

## Editorial Team

### Editor-in-Chief

Assist. Prof. Syarif Abdullah, S.Si., M.Si., Department of Mechanical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.

### Deputy Editor-in-Chief

Assist. Prof. Sidik Susilo, ST., M.Sc., Department of Mechanical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.  
Assist. Prof. Ceri Ahendyarti, ST., M.Eng., Department of Electrical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.  
Assist. Prof. Ahmad Shulhany, M.Si., Department of Civil Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.

### Editorial Board Regional Africa

Prof. Hamdy F. M. Mohamed, Department of Physics, Faculty of Science, Minia University, Egypt  
Prof. Dr. Said Kenai, Department of Civil Engineering, Faculty of Technology, University of Blida, Algeria  
Assist. Prof. Dr. Alaa El Din Mahmoud, Department of Environmental Sciences, Faculty of Science, Alexandria University, Egypt

### Editorial Board Regional Europe

Prof. Dr.-ing. Ernst Gockenbach, Institute of Electric Power System, Faculty of Electrical Engineering, and Computer Science, Gottfried Wilhelm Leibniz Universität, Germany  
Prof. Vladislav P. Smolentsev, Department of Aerospace Engineering, Voronezh State Technical University, Russian Federation

### Editorial Board Regional Asia

Prof. Dr. Teddy Surya Gunawan, Department of Electrical and Computer Engineering, Faculty of Engineering, International Islamic University Malaysia, Malaysia  
Prof. Dr. Muhammad Hisyam Lee, Department of Mathematical Science, Faculty of Science, University Teknologi Malaysia, Malaysia  
Assist. Prof. Ida Nurcahyani, ST., M.Eng., Department of Electrical Engineering, Faculty of Engineering, Universitas Islam Indonesia  
Assist. Prof. Rofiroh, S.Pd., M.Si., Department of Mechanical Engineering, Faculty of Engineering, Universitas Muhammadiyah Tangerang  
Assist. Prof. Frena Fardillah, M.Pd., Department of Industrial Engineering, Faculty of Engineering, Universitas Muhammadiyah Tangerang  
Assist. Prof. Agusutrisno, S.Si., M.Sc., Department of Electrical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.  
Assist. Prof. Atia Sonda, S.Si., M.Si., Department of Industrial Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa, Indonesia  
Dimas Kukuh Nur Rachim, M.Sc., Mathematics, State Islamic University of Sultan Maulana Hasanuddin Banten, Indonesia  
Miftahul Huda, S.Mat., M.Si., Department of Statistics, Universitas Bina Bangsa, Indonesia  
Himmatul Mursyidah, S.Si., M.Si., Department of Informatics, Faculty of Engineering, Universitas Muhammadiyah Banten, Indonesia

### Graphic Design

Assist. Prof. Rahman Faiz Suwandana, ST., M.S., Department of Metallurgical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.  
Assist. Prof. Indah Uswatun Hasanah, S.Si., MT., Department of Metallurgical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.

### Secretariat


Assist. Prof. Shofiatul Ula, M.Eng., Department of Mechanical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa, Indonesia  
Assist. Prof. Fajri Ikhsan, S.Si., M.Si., Department of Metallurgical Engineering, Faculty of Engineering, Universitas Sultan Ageng Tirtayasa.

### Translator and Proofreader

Yazid Rukmayadi, S.Pd., M.Pd., UIN Sultan Maulana Hasanuddin, Banten, Indonesia



**Teknika: Jurnal Sains dan Teknologi** is licensed under a Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License.



#### MENU

- [Focus and Scope](#)
- [Copyright Notice](#)
- [Publication Ethics](#)
- [Editorial Boards](#)
- [Peer Reviewers](#)
- [Peer Review Process](#)
- [Author Guidelines](#)
- [Digital Archiving](#)
- [Open Access Policy](#)
- [Plagiarism Policy](#)
- [Retraction Policy](#)
- [Archiving](#)
- [Author Fees](#)
- [Indexing](#)
- [Contact Us](#)
- [Publisher](#)

#### ARTICLE TEMPLATE



#### JOURNAL STORIES



#### USER

You are logged in as...  
» My Journals  
» My Profile  
» Log Out

RECOMMENDED TOOLS



CITATION AND METADATA ANALYSIS

- » Scopus
- » Google Scholar
- » WIZDOM
- » Dimensions

ISSN BARCODE




e-ISSN



p-ISSN

VISITORS



Since July 2019

00250927

[View My Stats](#)

INFORMATION

- » For Readers
- » For Authors
- » For Librarians

JOURNAL CONTENT

Search

Search Scope

All

Browse

- » By Issue
- » By Author
- » By Title
- » By Sections
- » By Identify Types
- » Other Journals
- » Categories

NOTIFICATIONS

...

- » [View](#)
- » [Subscribe](#)

**CURRENT ISSUE**

<b>ATOM</b>	1.0
<b>RSS</b>	2.0
<b>RSS</b>	1.0

---





## Characteristics of fly ash geopolymer based on alkaline ratio of activators for building materials: *A review*

*I Dewa Made Alit Karyawan*<sup>a,1</sup>, *Ratna Yuniarti*<sup>a</sup>, *Hasyim*<sup>a</sup>, *Desi Widianty*<sup>a</sup>

<sup>a</sup>Civil Engineering Department, Faculty of Engineering, University of Mataram Jalan Majapahit No.62, Mataram 83125, Indonesia

<sup>1</sup>Corresponding author: [dewaalit@unram.ac.id](mailto:dewaalit@unram.ac.id)

### ARTICLE INFO

#### Article history:

Submitted 30 May 2022

Reviewed 31 May 2022

Revised 15 June 2022

Accepted 21 June 2022

Available online on 22 June 2022

#### Keywords:

Alkali ratio, building materials, *fly ash* geopolymer.

#### Kata kunci:

Rasio alkali, bahan bangunan, *fly ash*, geopolimer.

### ABSTRACT

The geopolymer introduced by Davidovits is a new binder for making concrete as an alternative to ordinary Portland cement. One of the materials used to make geopolymers is fly ash. The annual worldwide production of fly ash is estimated to be around 500 Mt. In making geopolymers with fly ash, scientists usually use activators such as silicate and aluminate solutions, as well as with kaolinite. The geopolymerization process is related to the metal oxide ratio of the activator solution. Geopolymers can withstand temperatures up to about 600°C, so they are fire/heat resistant. This paper describes the role of the comparison of dominant elements in a mixture of geopolymer paste with fly ash and alkali which produces the best quality based on compressive strength, where there is an effect of the ratio of alkali on the compressive strength of geopolymer paste. Almost all of the highest compressive strength obtained did not follow the Davidovits rule. This is caused by other factors that affect the compressive strength such as the content of elements such as Si and Al in fly ash and the curing temperature. However, the volumetric and mechanical properties of the artificial aggregate (geopolymer fly ash application) meet the requirements as a road material. It's just that the absorption value is above the requirements (>3%). Seeing the properties of these geopolymers, there is hope to be developed into materials for building materials.

### ABSTRAK

Geopolimer yang diperkenalkan oleh Davidovits adalah pengikat baru untuk membuat beton sebagai alternatif pengganti semen *Portland* biasa. Salah satu bahan yang digunakan untuk membuat geopolimer adalah *fly ash*. Produksi tahunan *fly ash* seluruh dunia diperkirakan sekitar 500 Mt. Dalam membuat Geopolimer dari *fly ash* para ilmuwan biasanya menggunakan aktivator seperti larutan silikat dan aluminat, serta dari kaolinit. Proses geopolimerisasi berkaitan dengan rasio oksida logam dari larutan aktivator. Geopolimer dapat menahan suhu hingga sekitar 600°C, sehingga tahan api/panas. Makalah ini menjelaskan tentang peranan perbandingan unsur-unsur dominan pada campuran pasta geopolimer dengan *fly ash* dan alkali yang menghasilkan kualitas terbaik berdasarkan kuat tekan, dimana terdapat pengaruh perbandingan alkali terhadap kuat tekan pasta geopolimer. Hampir seluruh kuat tekan tertinggi yang didapatkan tidak mengikuti aturan Davidovits. Hal ini disebabkan oleh faktor lain yang mempengaruhi kuat tekan seperti kandungan unsur-unsur seperti Si dan Al dalam *fly ash* dan temperatur curing. Namun, *properties volumetric* dan mekanik agregat buatan (aplikasi geopolymer *fly ash*) memenuhi persyaratan sebagai bahan jalan. Hanya saja nilai penyerapannya di atas persyaratan (>3%). Melihat sifat-sifat geopolimer tersebut, membuka harapan untuk dikembangkan menjadi material untuk bahan bangunan.

Available online at <http://dx.doi.org/10.36055/tjst.v18i1.15410>

## 1. Introduction

Nowadays, waste is in demand for research as a building material. Research by utilizing mine dust waste in an amount not exceeding 5% can increase the ability of lateritic soils as subgrade [1]. Another waste, namely fly ash, is currently being studied as a building material in the form of geopolymers to be made into concrete. Fly ash is used as a cement substitute. Although the compressive strength and tensile strength are lower, the workability of concrete



increases [2]. Research on geopolymer paste based on the comparison of  $\text{Na}_2\text{SiO}_3$  with NaOH on the compressive strength of the paste, in realizing the idea of making artificial aggregates, shows that the compressive strength of fly ash based geopolymer paste can be increased by modifying the alkali activator and NaOH molarity [3]. Research on the volumetric characteristics of fly ash based geopolymer, as an artificial aggregate with a focus on the ratio of alkali activator, has shown an effect on the specific gravity and absorption of the aggregate [4]. Aggregate made of geopolymer fly ash, meets the requirements for hardness, strength and durability, as a pavement material with an alkaline activator ratio of less than 3.0 [5].

The Geopolymer was originally introduced by Davidovits. Geopolymer is a new binder for making concrete as an alternative to ordinary Portland cement. Describe an inorganic aluminosilicate polymer produced from the synthesis of natural materials such as kaolinite clay or industrially producing fly ash and slag with highly alkaline activators [6]. Geopolymer from iron ore tailings (IOT), is a microevolution of geopolymer by combining fly ash as starting material with IOT and activated with sodium silicate and sodium hydroxide solution [7]. In an effort to reduce  $\text{CO}_2$  emissions in the cement manufacturing process, the use of fly ash as a geopolymer material is very interesting. Every year a large amount of coal ash is produced [8]. Annual worldwide coal ash production is estimated to be around 600 Mt, of which about 500 Mt is fly ash [6]. One approach to using fly ash is to use it as an artificial aggregate to replace natural aggregate. The reasons that support this approach are: (1) fly ash accounts for 90% of the total ash produced, (2) the presence of natural aggregates is dwindling, and (3) the large amount of aggregate demand for civil engineering infrastructure is continuously increasing. For example, to make concrete about 70-80% is the mass of aggregate [7].

The use of aggregate is very wide not only for concrete. Therefore, the manufacture of fly ash aggregates not only reduces the impact of fly ash disposal on the environment but also provides great benefits to the economy [8]. Fly ash geopolymer is getting more attention and interest from researchers because it has high mechanical strength, high-temperature resistance, and higher durability when compared to ordinary cement. An investigation of the durability of fly ash based geopolymer with metakaolin at high temperature and acid concluded that the geopolymer has better durability than ordinary Portland cement under the same conditions [7]. This type of alkaline activator plays an important role in the geopolymerization process and has a significant effect on the mechanical strength of the geopolymer. Currently, the most commonly used activating base is a combination of sodium hydroxide solution (NaOH) and sodium silicate solution ( $\text{Na}_2\text{SiO}_3$ ) with different mass ratios of  $\text{Na}_2\text{SiO}_3/\text{NaOH}$ . The addition of Super Plasticizer (SP) without alkaline elements did not cause a significant change in the strength of the activated fly ash paste and did not increase the workability [6].

Geopolymerization using various fly ash compositions with oxide molar ratios, revealed that fly ash geopolymer depends more on the internal properties of the fly ash itself than on the molar ratio of the oxide. The workability and geopolymer strength of a mixture of sand and high calcium fly ash (Class C fly ash) depends on the amount of sodium silicate and sodium hydroxide in the geopolymer gel. In a mixture, these two alkaline activator components affect the workability of the gel and the strength of the geopolymer. Geopolymerization is highly dependent on the physicochemical properties of fly ash, the availability of silicate and aluminate solutions, and the concentration of added sodium hydroxide [8].

In the production of geopolymers from fly ash, scientists usually refer to the manufacture of geopolymers from activators such as silicate and aluminate solutions, as well as from kaolinite. Geopolymerization of the activator solution, related to the metal oxide ratio of the activator solution such as  $\text{SiO}_2/\text{M}_2\text{O}$ ,  $\text{SiO}_2/\text{Al}_2\text{O}_3$ ,  $\text{M}_2\text{O}/\text{H}_2\text{O}$  and  $\text{M}_2\text{O}/\text{Al}_2\text{O}_3$ , where M is sodium or potassium [8]. In addition to the alkali ratio and atomic content in fly ash, temperature also affects the compressive strength of geopolymers [9]. The compressive strength of geopolymers increases with increasing curing temperature. Geopolymer can withstand exposure to temperatures up to about  $600^\circ\text{C}$ , so this material is a fire-resistant material [10]. This gave rise to the idea of making building materials with geopolymer for civil engineering construction. Based on the results of several studies, this paper aims to explain the role of comparison of the dominant alkaline activator element in a mixture of geopolymer paste with fly ash which produces the best quality.

## 2. Fly ash content

Fly ash is industrial waste that can be found all over the world. Fly ash is a material that has distinctive properties and is a source of aluminosilicates. Fly ash is an industrial product that is proven to be suitable for producing geopolymer materials. The geopolymer properties of fly ash have been studied extensively in the last decade. A finding indicates that fly ash is suitable for making geopolymers, and the resulting geopolymer presents high mechanical properties and durability [11]. Fly ash has pozzolanic properties and is the result of power plant fuel. Fly ash mainly consists of unburned carbon and aluminosilicate particles as well as mineral constituents of fly ash including the glass phase and the crystalline phase [7]. Table 1 shows that the atomic content in fly ash varies.

**Table 1.** Variation of mineral content in fly ash.

Source	Fansuri et al. [8] FA-A	Fansuri et al. [8] FA-B	Fansuri et al. [8] FA-C	Fansuri et al. [8] FA-D	Fansuri et al. [8] FA-E	Nematollahi & Sanjayan [6]	Duan et al. [7]	Pu et al. [11]	Khan et al. [12]	R. N. Thakur and S. Ghosh [13]
$\text{SiO}_2$	69.60	67.20	66.10	55.70	52.30	48.80	29.47	29.47	51.11	56.01
$\text{Al}_2\text{O}_3$	24.40	26.40	30.70	26.60	32.40	27.00	51.72	51.72	25.56	29.80
$\text{Fe}_2\text{O}_3$	1.80	1.40	0.54	10.80	11.00	10.20	2.25	2.25	12.48	3.58
CaO	0.29	0.35	0.06	1.10	1.00	6.20	5.21	5.21	4.30	2.36
MgO	0.30	0.30	0.13	0.65	0.80	1.40	0.15	0.15	1.45	0.30
$\text{Na}_2\text{O}$	0.22	0.29	<0.05	0.23	0.10	0.37	0.05	0.05	0.77	0.61
$\text{K}_2\text{O}$	2.50	2.90	0.28	0.47	0.22	0.85	0.35	0.35	0.70	0.73
$\text{TiO}_2$	1.00	1.10	2.10	1.60	2.10	1.30	1.83	1.83	1.32	1.75
$\text{Mn}_2\text{O}_3$	0.03	0.02	<0.02	0.03	0.20	0.15	0.03	0.03	0.15	-
$\text{SO}_3$	<0.02	0.03	<0.02	0.03	<0.02	0.22	-	-	0.24	-
$\text{P}_2\text{O}_5$	0.09	0.08	0.07	1.40	0.07	1.20	-	-	0.885	0.44
BaO	0.05	0.06	0.04	0.32	0.04	0.19	-	-	-	-

Source	Fansuri et al. [8] FA-A	Fansuri et al. [8] FA-B	Fansuri et al. [8] FA-C	Fansuri et al. [8] FA-D	Fansuri et al. [8] FA-E	Nematollahi & Sanjayan [6]	Duan et al. [7]	Pu et al. [11]	Khan et al. [12]	R. N. Thakur and S. Ghosh [13]
SrO	0.03	0.03	<0.02	0.33	<0.02	0.16	-	-	-	-
ZnO	<0.02	<0.02	0.08	0.05	<0.02	-	-	-	-	-
V <sub>2</sub> O <sub>5</sub>	0.02	0.03	0.05	0.03	0.02	-	-	-	-	-
LOI*	-	-	-	-	-	-	8.58	8.58	0.57	0.40

### 3. The role of alkalis in geopolymer mixture

Geopolymer is a type of cement material with alumino-silicate content. The exact geopolymerization mechanism is not well understood because the process involves rapid chemical reactions [14]. Base activation is a chemical process that gives rapid changes to certain structures [15]. However, the predicted mechanism includes three stages: (1) separation of Si and Al atoms from the material through the action of hydroxide ions, (2) condensation of precursors in monomers, (3) arrangement/polymerization of monomers into polymer structures. The atomic ratio of Si:Al in the polysilicate structure determines the field of application. Low Si:Al ratios 1, 2, and 3 form a very rigid 3D network. The high Si:Al ratio, higher than 15, gives the geopolymer material a polymeric character [14].

Alkaline activation of fly ash is different from the hydration of Portland cement. The most widely used alkaline activator is a mixture of sodium or potassium hydroxide (NaOH, KOH) and sodium silicate or potassium silicate. Alkaline liquids can be used to activate silicon (Si) and aluminum (Al) in natural or manufactured materials to produce binders [15]. Sodium hydroxide increases the amount of silicate and aluminate solutions in the geopolymer mixture. Solubility tests on various fly ash samples showed that the solubility increased when the sodium hydroxide concentration in fly ash increased, which also increased the strength of the resulting geopolymer aggregate. The compressive strength of geopolymer aggregates also increases to a maximum before decreasing again when the amount of sodium silicate increases [8]. The geopolymer, introduced by Davidovits in 1970, is synthesized by mixing aluminosilicate reactive materials such as fly ash or iron ore tailings and a strong alkaline solution (such as NaOH or KOH) at room temperature. Alkali activation of waste materials, was first introduced in the 1940s is the origin of geopolymer research [7].

### 4. Compressive strength of geopolymer paste

Geopolymerization is highly dependent on the physicochemical properties of fly ash, the availability of silicate and aluminate solutions, and the concentration of added sodium hydroxide [8]. This is evidenced by using 6 types of fly ash and 6 variants of alkaline ratios, the paste that produces the highest compressive strength are obtained for Fly ash A = 44.5 MPa, Fly ash B = 13 MPa, Fly ash C = 16.5 MPa, Fly ash D = 13 MPa and Fly ash E = 3.36 MPa. Different fly ash can give different reactivity because the chemical composition varies. The effect of NaOH molarity, fly ash and alkali activator ratio, NaSiO/NaOH ratio, and curing temperature are very important to achieve optimal geopolymer strength [15]. The addition of SP did not cause a significant change in the strength of the alkali activated fly ash paste, and did not increase the workability [6].

The study on geopolymers prepared from iron ore tailings was tested after exposure to 3 and 7 thermal cycles at different heating target temperatures of 200°C, 400°C, and 800°C. Fly ash was replaced in stages from 0% to 30% at intervals of 10% by weight. Under the influence of thermal cycling, the compressive strength decreases significantly, especially after 7 thermal cycles. The presence of IOT increases the thermal resistance of the geopolymer so that there is an increase in compressive strength. The gradual replacement of fly ash up to 30% leads to a reduction in porosity and the microcrackings become much denser, resulting in increased compressive strength [7]. The compressive strength for geopolymer specimens with different alkali content shows that the compressive strength increases almost linearly with increasing alkalinity of the mixture. Increasing the alkali content of the geopolymer mixture, results in a decrease in the number and size of unreacted fly ash particles, indicating the formation of more aluminosilicate gels resulting in an increase in compressive strength [13]. Table 2 shows the compressive strength of the paste from several previous studies.


**Table 2.** The ratio of Na<sub>2</sub>O/ SiO<sub>2</sub>, SiO<sub>2</sub>/ Al<sub>2</sub>O<sub>3</sub> and H<sub>2</sub>O/ Na<sub>2</sub>O and the highest compressive strength

Source	Fansuri et al. [8]	Nematollahi & Sanjayan [6]	Duan et al. [7]	Pu et al. [11]	Khan et al. [12]	R. N. Thakur and S. Ghosh [13]
Na <sub>2</sub> O/SiO <sub>2</sub>	1.016	0.915	2.898	0.363	0.180	0.155
SiO <sub>2</sub> /Al <sub>2</sub> O <sub>3</sub>	0.845	1.654	2.062	0.299	2.120	4.000
H <sub>2</sub> O/Na <sub>2</sub> O	0.385	12.676	2.969	2.674	10.320	8.170
Highest Compressive Strength	44.5 Mpa	96.2 MPa	50 MPa	70 MPa	103 MPa	37.27 MPa

### 5. Discussion

The ratio of Na<sub>2</sub>O/SiO<sub>2</sub>, SiO<sub>2</sub>/Al<sub>2</sub>O<sub>3</sub>, and H<sub>2</sub>O/Na<sub>2</sub>O in the geopolymer is known by calculating the total weight of the content of each compound. After knowing the content of each in weight, it can be calculated the ratio in moles by dividing the weight of each by the atomic mass. For example, for a mixture of A-1 to find the ratio of Na<sub>2</sub>O/SiO<sub>2</sub>, the total weight of Na<sub>2</sub>O and SiO<sub>2</sub> must first be found both from fly ash and from reactants (alkali). The total weight of Na<sub>2</sub>O = 9.703 grams and SiO<sub>2</sub> = 21.563 grams. Then converted into moles by dividing the total weight of each by the mass of each atom. The atomic mass of Na<sub>2</sub>O = 62 gram/mol and SiO<sub>2</sub> = 60.09 gram/mol, then Na<sub>2</sub>O = 9.703 gram/62 gram/mol = 0.157 mol and SiO<sub>2</sub> = 21.563 gram/60.09 gram/mol =

0.359 mol. Furthermore, the ratio of  $\text{Na}_2\text{O}/\text{SiO}_2 = 0.157 \text{ mol}/0.359 \text{ mol} = 0.436$  is obtained. The ratio of the whole mixture is based on the results of previous studies [8][6][7][11][13].

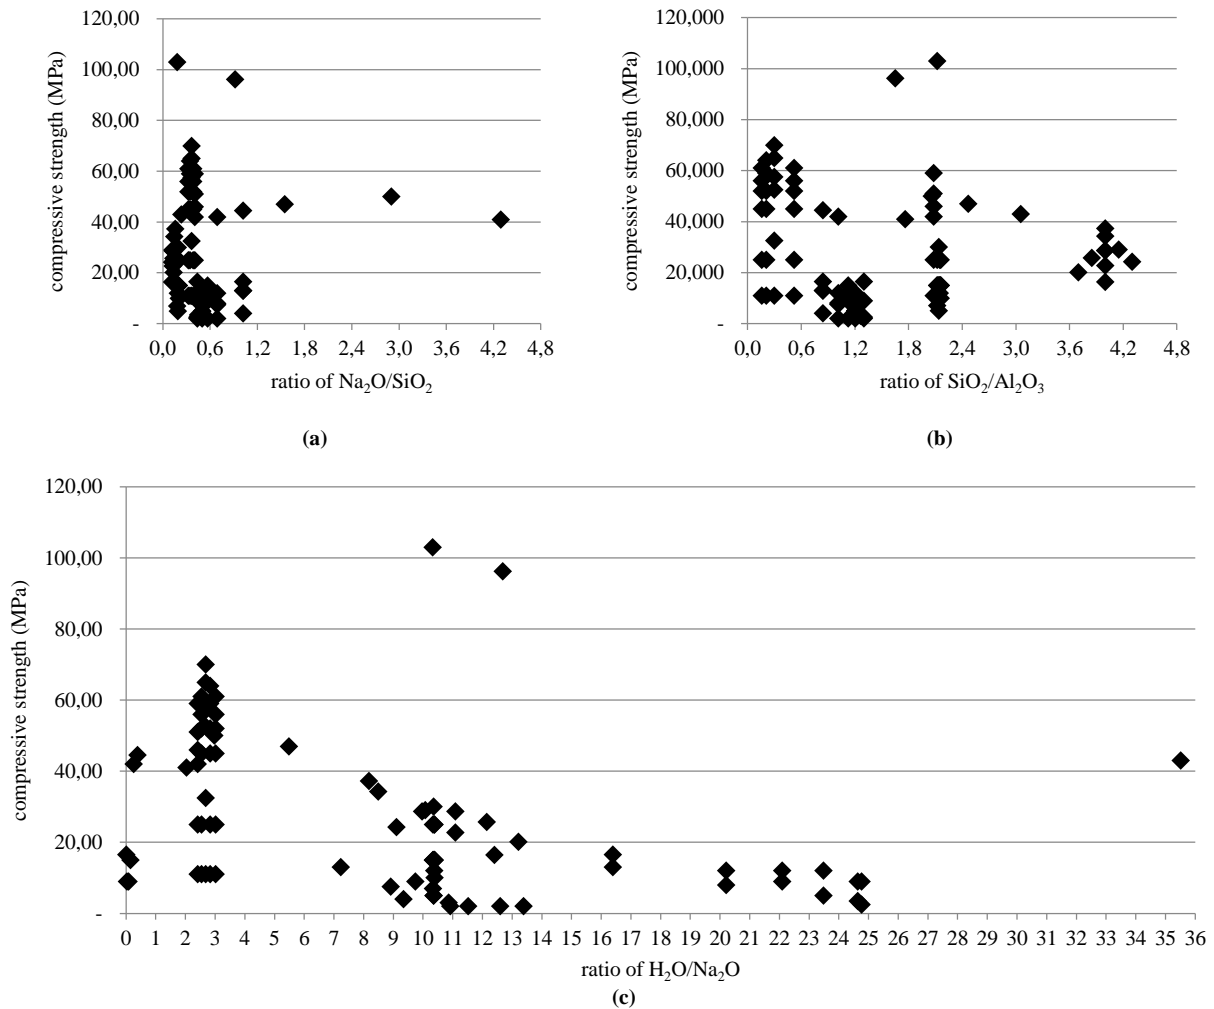

**Figure 1. (a) ratio of  $\text{Na}_2\text{O}/\text{SiO}_2$  to compressive strength; (b) ratio of  $\text{SiO}_2/\text{Al}_2\text{O}_3$  to compressive strength (c) ratio of  $\text{H}_2\text{O}/\text{Na}_2\text{O}$  to compressive strength**

Figure 1 shows, that with the ratios of  $\text{Na}_2\text{O}/\text{SiO}_2$ ,  $\text{SiO}_2/\text{Al}_2\text{O}_3$ , and  $\text{H}_2\text{O}/\text{Na}_2\text{O}$ , there are some discrepancies with the intervals given by Davidovits. High compressive strength polarization occurs at more than one interval. At the  $\text{Na}_2\text{O}/\text{SiO}_2$  ratio, it can be seen that the polarization of compressive strength above 50 MPa is concentrated at the interval of 0.321-0.405, partly scattered at the ratio of 0.18 and 0.915. In the  $\text{SiO}_2/\text{Al}_2\text{O}_3$  ratio, it can be seen that the polarization of compressive strength above 50 MPa is concentrated at the interval of 0.162-0.522, partly scattered at the ratio of 1.654, 2.083, and 2.120. At the  $\text{H}_2\text{O}/\text{Na}_2\text{O}$  ratio, it can be seen that the polarization of compressive strength above 50 MPa is concentrated at intervals of 2.408-3.006, partly scattered at the ratio of 10.320 and 12.676. The results above show that with the same ratio of  $\text{Na}_2\text{O}/\text{SiO}_2$ ,  $\text{SiO}_2/\text{Al}_2\text{O}_3$ , and  $\text{H}_2\text{O}/\text{Na}_2\text{O}$ , the compressive strength obtained is different. Davidovits limits the geopolymer alkali ratio at the following intervals [8]:

- $0.2 < \text{Na}_2\text{O}/\text{SiO}_2 < 0.28$ ;
- $3.5 < \text{SiO}_2/\text{Al}_2\text{O}_3 < 4.5$ ;
- $15 < \text{H}_2\text{O}/\text{Na}_2\text{O} < 17.5$ .

Based on the interval above for the  $\text{Na}_2\text{O}/\text{SiO}_2$  ratio, the average compressive strength in that interval is 21.60 MPa, at the  $\text{SiO}_2/\text{Al}_2\text{O}_3$  ratio, the average compressive strength in the interval is 26.715 MPa, and 14.75 MPa is the strength press the average for the interval  $\text{H}_2\text{O}/\text{Na}_2\text{O}$  ratio. Compressive strength greater than 50 MPa was found at the average ratio of  $\text{Na}_2\text{O}/\text{SiO}_2 = 0.382$ ,  $\text{SiO}_2/\text{Al}_2\text{O}_3 = 0.695$  and the ratio of  $\text{H}_2\text{O}/\text{Na}_2\text{O} = 3.743$ . This shows that the alkali ratio is not the only determinant of geopolymer performance. The highest compressive strength of the ratio of  $\text{Na}_2\text{O}/\text{SiO}_2$ ,  $\text{SiO}_2/\text{Al}_2\text{O}_3$  and  $\text{H}_2\text{O}/\text{Na}_2\text{O}$  (Table 2). However, it is not necessarily the best ratio that can be used. This is because the compressive strength value is obtained by different methods. The difference in curing temperature and fly ash used can also affect the compressive strength.

In the study of geopolymer pastes with class C fly ash, low water to fly ash (W/F) ratio could satisfy fluidity. Increasing the sodium hydroxide concentration decreases the fluidity of the mixture. In addition to the W/F ratio, the difference in curing temperature also has an effect. With a curing temperature of  $70^\circ\text{C}$  for 24 hours, the geopolymer paste experienced a much higher compressive strength. This is because the structure becomes denser, where the density of the paste structure contributes to the increase in compressive strength [16]. Even the composition of lime (Ca) in the geopolymer also has an effect. The addition of lime sand increases the compressive strength of fly ash based geopolymer because it can change the composition of the gel phase in the geopolymer structure and with physical strengthening due to good sand grain bonding. The compressive strength of the geopolymer paste is lower than that of the geopolymer mortar because in the gel phase the geopolymer mortar has a Ca content which is much higher than the Ca content of the geopolymer paste. The value of this parameter increases with an increasing dose of alkali and silicate. At one point, the maximum value is reached and then

it starts to decrease. The compressive strength increases with increasing NaOH concentration and the mass ratio  $w(\text{Na}_2\text{SiO}_3)/w(\text{NaOH})$ , reaches its maximum value at one point and then decreases. Fly ash based geopolymer can be considered as a brittle material based on the maximum compressive strength and minimum flexural strength values. On the other hand, from the increase in compressive strength, there was a slight decrease in the flexural strength of the fly ash geopolymer. In addition, the presence of good physical bonding of the sand grains also contributes to the strength of the fly ash based geopolymer [17].

Artificial aggregate is one application of geopolymer fly ash as a building material (road pavement material). The ratio of alkaline activator between Sodium Silicate and Sodium Hydroxide used is 1.5, 2, 2.5, and 3. Aggregate is made using a granulator. The volumetric and mechanical properties of the aggregate indicate that the aggregate meets the requirements for use as a road pavement material. The weakness found is that the aggregate absorption is greater than 3% (i.e. as low as 6.1% at 2.5% alkali ratio) [5][4].

## 6. Conclusion

The conclusion of the discussion of the results of several studies on the use of geopolymers as building materials is as follows:

- 1) There is an influence of the alkali ratio on the compressive strength of geopolymer paste, but the highest compressive strength almost entirely does not follow the Davidovits rule. This is due to other factors that affect the compressive strength such as the content of elements such as Si and Al in fly ash and the curing temperature.
- 2) The application of geopolymer as an artificial aggregate for road materials, shows weakness in its absorption (>3%), while other characteristics meet the requirements.

## Acknowledgements

This paper is a review to deepen the theory of supporting the implementation of research with PNPB 2022 funds from the University of Mataram and acknowledges the Institute for Research and Community Service at the University of Mataram.

## REFERENCES

- [1] J. Godfrey, W. Tom, and T. A. Longjohn, "Utilization of Laterite Soil Stabilized With Quarry Dust and Lime As Subgrade Material," *J. Archit. Civ. Eng.*, vol. 7, no. 3, pp. 18–22, 2022.
- [2] R. Morsy and S. Ghonaim, "Experimental Study on Flexure Behavior of Reinforced Concrete Beams using Fly Ash and Slag," *J. Archit. Civ. Eng.*, vol. 7, no. 1, pp. 1–6, 2022.
- [3] I. D. M. A. Karyawan, E. Ahyudanari, and J. J. Ekaputri, "Potential Use of Fly Ash Base-Geopolymer as Aggregate Substitution in Asphalt Concrete Mixtures," *Int. J. Eng. Technol.*, vol. 9, no. 5, pp. 3744–3752, 2017, doi: 10.21817/ijet/2017/v9i5/170905005.
- [4] I. D. M. A. Karyawan, J. J. Ekaputri, I. Widyatmoko, and E. Ahyudanari, "The Effects of Na<sub>2</sub>SiO<sub>3</sub>/NaOH Ratios on the Volumetric Properties of Fly Ash Geopolymer Artificial Aggregates," 2019.
- [5] I. D. M. Karyawan, J. J. Ekaputri, I. Widyatmoko, and E. Ahyudanari, "The effect of various Na<sub>2</sub>SiO<sub>3</sub>/NaOH ratios on the physical properties and microstructure of artificial aggregates," *J. Eng. Sci. Technol.*, vol. 15, no. 2, pp. 1139–1154, 2020.
- [6] B. Nematollahi and J. Sanjayan, "Effect of different superplasticizers and activator combinations on workability and strength of fly ash based geopolymer," *Mater. Des.*, 2014, doi: 10.1016/j.matdes.2014.01.064.
- [7] P. Duan, C. Yan, W. Zhou, and D. Ren, "Fresh properties, compressive strength and microstructure of fly ash geopolymer paste blended with iron ore tailing under thermal cycle," *Constr. Build. Mater.*, 2016, doi: 10.1016/j.conbuildmat.2016.05.059.
- [8] H. Fansuri, D. Prasetyoko, Z. Zhang, and D. Zhang, "The effect of sodium silicate and sodium hydroxide on the strength of aggregates made from coal fly ash using the geopolymerisation method," *Asia-Pacific J. Chem. Eng.*, 2012, doi: 10.1002/apj.493.
- [9] J. W. Wang and T. W. Cheng, "Production geopolymer materials by coal fly ash," vol. 2, pp. 263–266, 2003.
- [10] L. K. František Škvára, Tomáš Jílek, "Geopolymer materials based on fly ash," vol. 49, no. 3, pp. 195–204, 2005.
- [11] S. Pu, P. Duan, C. Yan, and D. Ren, "Influence of sepiolite addition on mechanical strength and microstructure of fly ash-metakaolin geopolymer paste," *Adv. Powder Technol.*, vol. 27, no. 6, pp. 2470–2477, 2016, doi: 10.1016/j.apt.2016.09.002.
- [12] M. Z. N. Khan, F. uddin A. Shaikh, Y. Hao, and H. Hao, "Synthesis of high strength ambient cured geopolymer composite by using low calcium fly ash," *Constr. Build. Mater.*, 2016, doi: 10.1016/j.conbuildmat.2016.08.097.
- [13] R. N. Thakur and S. Ghosh, "Effect of Mix Composition on Compressive Strength and Microstructure of Fly Ash Based Geopolymer Composites," *ARPJ J. Eng. Appl. Sci.*, vol. 4, no. 4, pp. 68–74, 2009.
- [14] M. M. A. Abdullah, K. Hussin, M. Bnhussain, K. N. Ismail, and W. M. W. Ibrahim, "Mechanism and Chemical Reaction of Fly Ash Geopolymer Cement- A Review," vol. 6, no. 1, pp. 35–44, 2011.
- [15] M. M. A. B. Abdullah, H. Kamarudin, M. Bnhussain, I. K. Nizar, A. R. Rafiza, and Y. Zarina, "The Processing , Characterization , and Properties of Fly Ash Based Geopolymer Concrete," *Adv. Mater. Sci.*, vol. 30, no. 1, pp. 90–97, 2012.
- [16] X. Li, X. Ma, S. Zhang, and E. Zheng, "Mechanical Properties and Microstructure of Class C Fly Ash-Based Geopolymer Paste and Mortar," pp. 1485–1495, 2013, doi: 10.3390/ma6041485.
- [17] R. Zejak, I. Nikoli, D. Ble, V. Radmilovi, and V. Radmilovi, "Mechanical And Microstructural Properties Of The Fly-Ash-Based Geopolymer Paste And Mortar Geopolimernih Veziv In Malt Iz Lete ^ Ega Pepela," vol. 47, no. 4, pp. 535–540, 2013.