



Civil Engineering and Architecture

Civil Engineering and Architecture is an international peer-reviewed journal that publishes original and high-quality research papers in all areas of civil engineering and architecture. As an important academic exchange platform, scientists and researchers can know the most up-to-date academic trends and seek valuable primary sources for reference.

ISSN: 2332-1091 (Print)

ISSN: 2332-1121 (Online)

Contact Us: cea.editor@hrpub.org or editor@hrpub.org

Website: https://www.hrpub.org/journals/jour_info.php?id=48

Aims & Scope

The subject areas include, but are not limited to the following fields:

- Architectural Drawing
- Architectural Style
- Architectural Theory
- Biomechanics
- Architectural Design
- Coastal Engineering
- Building Materials and Technology
- Smart Built Environment
- Earthquake Engineering
- Environmental Engineering
- Geotechnical Engineering
- Bridge Engineering
- Municipal Or Urban Engineering
- Organic Architecture
- Sociology of Architecture
- Structural Engineering
- Surveying
- Transportation Engineering
- History of Civil Engineering



Journals Information

[Aims & Scope](#)[Indexing](#)[Editorial Board](#)[Reviewers](#)[Guidelines](#)[Submit Manuscript](#)[Archive](#)[Article Processing Charges](#)[Call for Papers](#)[Publication Ethics and Malpractice](#)[Statement](#)[Copyright](#)[FAQs](#)

Special Issues Information

[Special Issues Guidelines](#)[Call for Special Issues](#)



Civil Engineering and Architecture

Civil Engineering and Architecture

Civil Engineering and Architecture is an international peer-reviewed journal that publishes original and high-quality research papers in all areas of civil engineering and architecture. As an important academic exchange platform, scientists and researchers can know the most up-to-date academic trends and seek valuable primary sources for reference.

ISSN: 2332-1091 (Print)

ISSN: 2332-1121 (Online)

Contact Us: cea.editor@hrpub.org or editor@hrpub.org

Website: https://www.hrpub.org/journals/jour_info.php?id=48

Archive

Volume 11 2023					
Vol.11 No.1	Vol.11 No.2	Vol.11 No.3	Vol.11 No.4		
Volume 10 2022					
Vol.10 No.1	Vol.10 No.2	Vol.10 No.3	Vol.10 No.3A	Vol.10 No.4	Vol.10 No.5
Vol.10 No.5A	Vol.10 No.6	Vol.10 No.7			
Volume 9 2021					
Vol.9 No.1	Vol.9 No.2	Vol.9 No.3	Vol.9 No.4	Vol.9 No.5	Vol.9 No.5A
Vol.9 No.6	Vol.9 No.7				
Volume 8 2020					
Vol.8 No.1	Vol.8 No.2	Vol.8 No.3	Vol.8 No.4	Vol.8 No.5	Vol.8 No.6
Volume 7 2019					
Vol.7 No.1	Vol.7 No.2	Vol.7 No.3A	Vol.7 No.3	Vol.7 No.4	Vol.7 No.5
Vol.7 No.6	Vol.7 No.6A				
Volume 6 2018					
Vol.6 No.1	Vol.6 No.2	Vol.6 No.3	Vol.6 No.4	Vol.6 No.5	Vol.6 No.6
Volume 5 2017					
Vol.5 No.1	Vol.5 No.2	Vol.5 No.3	Vol.5 No.4	Vol.5 No.5	Vol.5 No.6
Volume 4 2016					
Vol.4 No.1	Vol.4 No.2	Vol.4 No.3	Vol.4 No.4	Vol.4 No.5	Vol.4 No.6
Volume 3 2015					
Vol.3 No.1	Vol.3 No.2	Vol.3 No.3	Vol.3 No.4	Vol.3 No.5	Vol.3 No.6
Volume 2 2014					
Vol.2 No.1	Vol.2 No.2	Vol.2 No.3	Vol.2 No.4	Vol.2 No.5	Vol.2 No.6
Vol.2 No.7	Vol.2 No.8	Vol.2 No.9			
Volume 1 2013					
Vol.1 No.1	Vol.1 No.2	Vol.1 No.3	Vol.1 No.4		

Vol 10(Sep, 2022) No 5



Journals Information

[Aims & Scope](#)

[Indexing](#)

[Editorial Board](#)

[Reviewers](#)

[Guidelines](#)

[Submit Manuscript](#)

[Archive](#)

[Article Processing Charges](#)

[Call for Papers](#)

[Publication Ethics and Malpractice](#)

[Statement](#)

[Copyright](#)

[FAQs](#)

Special Issues Information

[Special Issues Guidelines](#)

[Call for Special Issues](#)

[Soft Copy, Cover Page, Table of Contents, Editorial, and Others](#)

Exo Case-Study and Prototype of the Dynamic Responsive Architectural System: The Key Attributes of Systemic Integration and Design – Part I

Dragana Ćirić

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1701 - 1717

DOI: 10.13189/cea.2022.100501

The Impact of Residential Gated Compounds on Quality of Life in Egypt

Aya Said Muawad, Rania Rushdy Moussa, Marianne Nabil Guirguis

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1718 - 1724

DOI: 10.13189/cea.2022.100502

A Framework for Systematic Assessment of Human Error in Construction Sites – A Sustainable Approach

Subbiah Ajith, Veerasimman Arumugaprabu, Mariusz Szóstak

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1725 - 1737

DOI: 10.13189/cea.2022.100503

Niuweu Bowen Architecture Style toward City Visual Quality

Hilma Tamiami Fachrudin, Imam Faisal Pane

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1738 - 1744

DOI: 10.13189/cea.2022.100504

Thinking Directions of Added Masses to Historic Buildings at the Twentieth Century Architecture

Mahenda Said Elsayed, Mohamed Atef Abou Ashour, Yasmine Sabry Hegazi

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1745 - 1771

DOI: 10.13189/cea.2022.100505

Assessment of Seismic Loss in Surakarta School Buildings

Yusep Muslih Purwana, Garup Lambang Goro, Siti Nurlita Fitri, Bambang Setiawan, Reki Arbianto

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1772 - 1787

DOI: 10.13189/cea.2022.100506

Effect of Expanded Polystyrene Foam Aggregate on Strength and Shrinkage Characteristics of Foamed Concrete

Hawaa A. Obaid, Ameer A. Hilal

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1788 - 1797

DOI: 10.13189/cea.2022.100507

Using Landscape Qualities to Enhance Walkability in Two Types of Egyptian Urban Communities

Dina Salem, Sara I. Khalifa, Sara Tarek

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1798 - 1813

DOI: 10.13189/cea.2022.100508

Strengthening AL-Kadhimin Tilted Minaret by Using a System of Micro-piles

Haider M. H.

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1814 - 1829

DOI: 10.13189/cea.2022.100509

Capacity Analysis of Reinforced Concrete vs. Composite Column on a 7 Floor Building

Erno Widayanto, Indra Nurtjahjaningtyas, Dan Sulfiatun Faizeh

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1830 - 1839

DOI: 10.13189/cea.2022.100510

Architecture of Air Transport Medicine Facilities

Iryna Bulakh, Nina Semyroz, Svitlana Kysil, Tetiana Bulhakova, Nataliia Mezhenha, Vadym Abyzov, Svitlana Zymina, Viktoriia Bulakh

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1840 - 1853

DOI: 10.13189/cea.2022.100511

Critical Uncertainty Factors Impacting Building Construction Projects in India

Luke Judson, Virendra Kumar Paul

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1854 - 1863

DOI: 10.13189/cea.2022.100512

Geopolymer Designed with Pumice Stone from Ecuador

Alexis Andrade, Tito Castillo, Marcel Paredes, Ester Gimenez, Víctor García

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1864 - 1880

DOI: 10.13189/cea.2022.100513

The Durability of Lightweight Geopolymer Concrete (LGC) on Chloride Resistance

Saloma, Arie Putra Usman, Hanafiah, Cindy Violita Ramadhanty

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1881 - 1890

DOI: 10.13189/cea.2022.100514

Lateral Behavior of Slab-Column Connection with Pyramid Shaped Drop Panel

Ahmed I., Hilal H., Mohamed Husain

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1891 - 1915

DOI: 10.13189/cea.2022.100515

Aspect Ratio and Relative Beam-Slab Stiffness Effects on the Long-term Deflection of Flat Plates and Beam Supported One-Way Slabs

Karwan Khalid Ismael, Sarkawt Asaad Hasan

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1916 - 1930

DOI: 10.13189/cea.2022.100516

Smart Biophilic Framework to Improve Productivity of Existing Office Buildings in Egypt

Ranad Bahaa Afify, Mohamed Medhat Dorra, Dalia Aboubakr, Indjy Mohamed Shawket

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1931 - 1947

DOI: 10.13189/cea.2022.100517

Safety Factors Investigation Based on FEM and LEM Approach in Toll Road Embankment Slope

Siti Nurlita Fitri, Fitria Wahyuni

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1948 - 1966

DOI: 10.13189/cea.2022.100518

The Adaptation to Sonic Territoriality: A Domestic Space Case Study

Ivana Agnes Sompie, Coriesta Dian Sulistiani, Tampanatu P. F. Sompie

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1967 - 1982

DOI: 10.13189/cea.2022.100519

Analysis of Adding GGBS and Fly Ash in Self Compacting Geo - Polymer Concrete for Structures

Thavasumony D, Nalanth N

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1983 - 1991

DOI: 10.13189/cea.2022.100520

Concrete with Manufactured Sand and the Effects on the Property of Durability

Anup Krushnarao Chitkeshwar, P. L. Naktode

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 1992 - 1999

DOI: 10.13189/cea.2022.100521

Experimental Evaluation of the Cyclic Behaviour of Scaled (1:3) Reinforced Concrete Frames

Bilal M. Yasin, Jafar A. Al thawabteh

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2000 - 2012

DOI: 10.13189/cea.2022.100522

Understanding the Fort and its Built Heritage in Pavagada of Tumakuru District in Karnataka

Vivek C. G., Sagar T. S.

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2013 - 2022

DOI: 10.13189/cea.2022.100523

An Approach to Prioritize Urban Conservation Heritage Areas According to Social Indicators

Abeer Mamdouh Taha, Hisham Amr Bahgat, Ahmed Mostafa Abdel Ghafaar

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2023 - 2040

DOI: 10.13189/cea.2022.100524

Integrated Built Environment that Meets Human Needs for Thermal Comfort

Tala Mari, Kabila Faris Hmood, Jawdat Goussous

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2041 - 2053

DOI: 10.13189/cea.2022.100525

Impact Curing Time and Compaction Methods to the Performance of Hot Mix Asphalt Asbuton

I Dewa Made Alit Karyawan, Ratna Yuniarti, Desi Widianty, Hasyim, Mudji Wahyudi

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2054 - 2064

DOI: 10.13189/cea.2022.100526

Local Law Enforcement Variables as Moderating Effect on the Behavior of Foreign Motorcycle Riders in Tourism Areas in Bali

Cokorda Putra Wirasutama, Putu Alit Suthanaya, Dewa Made Priyantha Wedagama, Anak Agung Gde Agung Yana

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2065 - 2074

DOI: 10.13189/cea.2022.100527

Transforming Old Cities into Smart Cities Using Environmental Key Performance Indicators to Solve Environmental Problems

Nora M. Faroun, Asmaa N. El-Badrawy, Lamis S. El-Gizawi

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2075 - 2088

DOI: 10.13189/cea.2022.100528

Evaluation of the Spatial Relationship for Urban Railway Stations and Their Impacts on the Surrounding Urban Environment: A Case Study on the New Abu Qir Railway Station in Alexandria

Riham Salah Mohamed, Nevine Ismail Mahmoud

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2089 - 2107

DOI: 10.13189/cea.2022.100529

Guideline for Atlas Flash Floods

Radwa Bakr, Doaa Amin, Khaled Gaber

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2108 - 2127

DOI: 10.13189/cea.2022.100530

Recycling of Waste Polyethylene Terephthalate (PET) into Insulating Wall Panels for Building Industry

Sadia Farooq, Mohammad Arif Kamal, Amna Khalid Qureshi, Farhana Naz, Maha Tariq

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2128 - 2133

DOI: 10.13189/cea.2022.100531

Study on Daylighting Performance in the CFAD Studios at the University of Sharjah

Aref Maksoud, Emad Mushtaha, Laila Chouman, Esraa Al Jawad, Sara A. Samra, Ahmad Sukkar, Moohammed Wasim Yahia

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2134 - 2143

DOI: 10.13189/cea.2022.100532

A Demonstrative and Estimated Model of the Values of Built Heritage from a Collection of Existing Models

Fatima Benchenni, Abdelkader Mebrouki, Juan Monjo-Carrió

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2144 - 2156

DOI: 10.13189/cea.2022.100533

Numerical Simulation for Flow over A Broad-Crested Weir Using FLOW-3D Program

Nadheer S. Ayoub, Alaa M. Hamad

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2157 - 2171
DOI: 10.13189/cea.2022.100534

Proposal to Establish Intercultural Hub and Library in Jeddah, Saudi Arabia

Tuqa Aldroubi, Aida Nayer

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2172 - 2179
DOI: 10.13189/cea.2022.100535

The Lost Identity of Jeddah

Bahia Bardeesi, Dina Muhrji, Ghaidaa Gutub, Haneen Al-Ahdal, Abdel-Moniem El-Shorbagy

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2180 - 2186
DOI: 10.13189/cea.2022.100536

Numerical Analysis of the Deformation Behavior of Geogrid-Reinforced MSE Wall Having FHR and SPT Wall Facing

Myoung-Soo Won, Christine P. Langcuyan, Jin-Hwan Lim, Seung-Boem Nam, Tae-Gew Ham, Man-Bok Ha

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2187 - 2203
DOI: 10.13189/cea.2022.100537

The Integration of Science and Technology in Creating an Interactive Architecture that is Locally Adaptive

Safaa Aldeen Hussein Ali, Sara Abdul Aalie Rasheed

[\[Abstract\]](#) [\[Full Text\]](#) [\[Full Article - PDF\]](#) pp. 2204 - 2214
DOI: 10.13189/cea.2022.100538



Civil Engineering and Architecture

Civil Engineering and Architecture is an international peer-reviewed journal that publishes original and high-quality research papers in all areas of civil engineering and architecture. As an important academic exchange platform, scientists and researchers can know the most up-to-date academic trends and seek valuable primary sources for reference.

ISSN: 2332-1091 (Print)

ISSN: 2332-1121 (Online)

Contact Us: cea.editor@hrpub.org or editor@hrpub.org

Website: https://www.hrpub.org/journals/jour_info.php?id=48

Editorial Board

Editor-in-Chief

Prof. Jorge M. Tavares Ribeiro

School of Architecture, University of Lisbon, Portugal

Honorary Editor-in-Chief

Dr. Masa Noguchi

University of Melbourne, Australia

Deputy Editor-in-Chief

Prof. Ashraf Badir

Department of Environmental and Civil Engineering, Florida Gulf Coast University, USA

Prof. Salvatore Leonardi

Department of Civil Engineering and Architecture, University of Catania - Via Santa Sofia, 64 95125 – Catania, Italy

Dr. Liyaning (Maggie) Tang

School of Architecture and Built Environment, University of Newcastle, Australia

Editorial Board

Prof. Aldo Renato Daniele Accardi

University of Palermo, Italy

Prof. Adel Francis

School of Higher Technology, University of Quebec, Canada

Prof. Jonas Jakaitis

Vilnius Gediminas Technical University, Lithuania

Prof. Muhammad Saleem

College of Engineering, University of Dammam, Saudi Arabia



Journals Information

[Aims & Scope](#)

[Indexing](#)

[Editorial Board](#)

[Reviewers](#)

[Guidelines](#)

[Submit Manuscript](#)

[Archive](#)

[Article Processing Charges](#)

[Call for Papers](#)

[Publication Ethics and Malpractice](#)

[Statement](#)

[Copyright](#)

[FAQs](#)

Special Issues Information

[Special Issues Guidelines](#)

[Call for Special Issues](#)

Prof. Alope Kumar Datta

Department of Civil Engineering, National Institute of Technology, India

Prof. Behzad Sodagar

School of Architecture and Design, College of Arts, University of Lincoln, UK

Prof. Rosa Maria Vitrano

Department of Architecture, University of Palermo, Italy

Prof. Antonio Formisano

Department of Structures for Engineering and Architecture, School of Polytechnic and Basic Sciences, University of Naples "Federico II", Italy

Prof. SALVATORE ANTONIO BIANCARDO

Department of Civil, Architectural and Environmental Engineering (DICEA), School of Polytechnic and Basic Sciences, University of Naples Federico II, Italy

Prof. Maurizio Nicolella

Department of Civil, Architectural and Environmental Engineering, University of Naples Federico II, Italy

Prof. Giuseppe Lacidogna

Department of Structural, Geotechnical and Building Engineering (DISEG), Polytechnic University of Turin, Turin, Italy

Prof. Stefano Dal Pont

Laboratory 3SR, Université Grenoble Alpes (UGA), France

Prof. Mario Grosso

Independent Researcher, Italy

Prof. H. Murat Celik

Department of City and Regional Planning, Istanbul Technical University, Turkey

Prof. Luigi Alini

Department of Civil Engineering and Architecture, University of Catania, Italy

Prof. Jacob Oludoye Oluwoye

Department of Community and Regional Planning, Alabama A&M University, USA

Dr. Chia-Hui Lin

Graduate Institute of Building and Planning, National Taiwan University, Taiwan

Dr. Engin Eroglu

Duzce University, Turkey

Dr. Santina Di Salvo

Department of Architecture, University of Palermo, Italy

Dr. Hongyuan Liu

School of Engineering, University of Tasmania, Australia

Dr. Amira Elnokaly

School of Architecture, University of Lincoln, UK

Dr. Damian Beben

Department of Geodesy and Geotechnics, Faculty of Civil Engineering, Opole University of Technology, Poland

Dr. Ying Wang

Deakin University, Australia

Dr. Daniela Jurasova

Department of Civil Engineering and Urban Planning, University of Zilina, Slovakia

Dr. Petros Christou

Department of Civil Engineering, Frederick University, Cyprus

Dr. George Vasdravellis

Heriot-Watt University, Institute for Infrastructure Engineering, UK

Dr. Lee Pugalís

Northumbria University, UK

Dr. Maurizio Francesco Errigo

Faculty of Engineering and Architecture, Kore University of Enna, Italy

Dr. Luisa Maria Calabrese

Delft University of Technology, Netherlands

Dr. Alessandro De Masi

University of Trento, Italy

Dr. Balvinder Singh

Guru Ramdas School of Planning, Guru Nanak Dev University, India

Dr. Mohammad Sharif Zami

Department of Architecture, College of Environmental Design (CED), King Fahd University of Petroleum & Minerals (KFUPM), Saudi Arabia

Dr. Massimo Losa

Department of Civil and Industrial Engineering, University of Pisa, Italy

Dr. Eglė Navickienė

Faculty of Architecture, Vilnius Gediminas Technical University, Lithuania

Dr. Natalija Lepkova

Department of Construction Economics and Property Management, Faculty of Civil Engineering, Vilnius Gediminas Technical University, Lithuania

Dr. E. Sadoglu

Department of Civil Engineering, Karadeniz Technical University, Turkey

Dr. Cristiana Cellucci

Department of Architecture, "G.D'Annunzio" University, Pescara, Italy

Dr. Natalia Distefano

Department of Civil Engineering and Architecture, University of Catania - Via Santa Sofia, 64 95125 – Catania, Italy

Dr. Pappalardo Giuseppina

Department of Civil Engineering & Architecture, University of Catania, Italy

Dr. Paolo Castaldo

Department of Structural, Building and Geotechnical Engineering, Polytechnic University of Turin, Italy

Dr. Mário Rui Tiago Arruda

Higher Technical Institute, Universidade de Lisboa, Portugal

Dr. Maria G. Augeri

Department of Enterprise Engineering, Tor Vergata University of Rome, Italy

Assoc. Prof. Antonio Brencich

Department of Civil, Environmental and Architectural Engineering, University of Genoa, Italy

Assoc. Prof. Ganesan Senthil Kumaran

Department of Civil Engineering and Construction, Copperbelt University, Zambia

Assoc. Prof. Silvia Brunoro

Department of Architecture, University of Ferrara, Italy

Prof. Ing. Juraj Králik

Department of Structural Mechanics, Faculty of Civil Engineering, Slovak University of Technology in Bratislava, Slovakia

Assoc. Prof. Baris Sevim

Department of Civil Engineering, Yıldız Technical University, Turkey



Source details

Civil Engineering and Architecture

Scopus coverage years: from 2018 to Present

Publisher: Horizon Research Publishing

ISSN: 2332-1091 E-ISSN: 2332-1121

Subject area: Engineering: Architecture Engineering: Civil and Structural Engineering

Source type: Journal

CiteScore 2021

1.0



SJR 2021

0.228



SNIP 2021

1.269



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

Improved CiteScore methodology



CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. [Learn more >](#)

CiteScore 2021

$$1.0 = \frac{455 \text{ Citations 2018 - 2021}}{461 \text{ Documents 2018 - 2021}}$$

Calculated on 05 May, 2022

CiteScoreTracker 2022

$$1.2 = \frac{774 \text{ Citations to date}}{637 \text{ Documents to date}}$$

Last updated on 05 April, 2023 • Updated monthly

CiteScore rank 2021

Category	Rank	Percentile
Engineering		
Architecture	#56/149	62nd
Engineering		
Civil and Structural Engineering	#258/326	21st

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

About Scopus

[What is Scopus](#)

[Content coverage](#)

[Scopus blog](#)

[Scopus API](#)

[Privacy matters](#)

Language

[日本語版を表示する](#)

[查看简体中文版本](#)

[查看繁體中文版本](#)

[Просмотр версии на русском языке](#)

Customer Service

[Help](#)

[Tutorials](#)

[Contact us](#)

ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies ↗.



Impact Curing Time and Compaction Methods to the Performance of Hot Mix Asphalt Asbuton

I Dewa Made Alit Karyawan*, Ratna Yuniarti, Desi Widianty, Hasyim, Mudji Wahyudi

Department of Civil Engineering, Faculty of Engineering, University of Mataram, Mataram, 83115, West Nusa Tenggara, Indonesia

Received May 4, 2022; Revised June 6, 2022; Accepted July 11, 2022

Cite This Paper in the Following Citation Styles

(a): [1] I Dewa Made Alit Karyawan, Ratna Yuniarti, Desi Widianty, Hasyim, Mudji Wahyudi, "Impact Curing Time and Compaction Methods to the Performance of Hot Mix Asphalt Asbuton," *Civil Engineering and Architecture*, Vol. 10, No. 5, pp. 2054-2064, 2022. DOI: 10.13189/cea.2022.100526.

(b): I Dewa Made Alit Karyawan, Ratna Yuniarti, Desi Widianty, Hasyim, Mudji Wahyudi (2022). *Impact Curing Time and Compaction Methods to the Performance of Hot Mix Asphalt Asbuton*. *Civil Engineering and Architecture*, 10(5), 2054-2064. DOI: 10.13189/cea.2022.100526.

Copyright©2022 by authors, all rights reserved. Authors agree that this article remains permanently open access under the terms of the Creative Commons Attribution License 4.0 International License

Abstract Asbuton is rock asphalt located on Buton Island, Indonesia. The contained asphalt is hard and produces very high viscosities, making it very difficult to facilitate uniform coating of aggregates and to bind asphalt mixtures. These challenges in the process of incorporating Asbuton in asphalt mixtures make it less popular than the petroleum asphalt. The current Indonesia standards require Hot Mix Asphalt incorporating Asbuton (HMAA) to be cured for a few days before it is compacted (scenario 1). The curing duration is aimed to allow softening of the natural asphalt contained in Asbuton. This study investigated a new method of conditioning HMAA (scenario 2). The results showed that the volumetric and Marshall characteristics of HMAA were influenced by the curing time and compaction methods. The findings suggest that the curing method proposed in scenario 2 can be omitted; as such it can speed up the asphaltting process. This study found that HMAA can be spread and compacted without curing, with a provision made for the road to be closed from traffic for a minimum of eight days after the compaction is complete.

Keywords Asbuton, Compaction, Curing Time, Marshall Stability, Volumetric Characteristics, Rock Asphalt

aggregate and asphalt. Therefore, efforts are made to obtain cheaper materials, so that production costs can be reduced. One of them is the use of reclaimed asphalt pavement (RAP) mixed with shredded plastic waste (SWP) in a warm stone matrix asphalt (SMA) mixture. The resistance to cracking of SMA can be increased by the use of RAP and SWP of up to 12% [1]. The application of fly ash as an artificial aggregate [2], [3], has the potential as a partial substitute for natural aggregate [4], with skid resistance that meets the requirements of roads in urban areas with traffic speeds below 95 km/hour [5]. Recently, the utilize of natural asphalt in the form of rock asphalt containing aggregates and asphalt was developed as a road pavement material. In Buton Island, Indonesia, there is naturally occurring asphalt, in the form of rock asphalt, containing 61.7% ash content, 2% moisture content, and 27% asphalt content [6], [7] called Asbuton. The high content of Asbuton deposits on Buton Island is in Lawele, Kabungka, Waisnu, Wariti, and Epe. It was noted that the highest Asbuton content was found in Lawele and Kabungka [8]. It is estimated that there are about 670 million tons of Asbuton deposits on Buton Island. The deposits are found in limestone formations with natural asphalt residues between 15% and 35% of asphalt by weight [9]. Asphalt and aggregates contained in rock asphalt, including Asbuton, have the potential to solve material problems for asphalt mixtures in the world, especially in countries with limited availability.

Resistance to deformation is a factor that needs to be considered in the design of road pavement construction. Deformation causes a decrease in the strength of the road

1. Introduction

The asphalt mixture's composition is dominated by

surface layer due to repeated wheel loads and increases in road surface temperature [10]. The increase in temperature causes the bonding ability between asphalt and aggregate to decrease due to the asphalt softening [11]. Deformation can be anticipated by material engineering and asphalt mixing and compaction methods. For example, the technique uses Asbuton material with hot and cold compaction methods. The use of Asbuton is not as popular as the use of petroleum asphalt due to the complex processes for extraction and/or utilization of the natural asphalt. Expertise in the adhesive properties of asphalt can assist in producing more durable asphalt pavements [12]. The natural asphalt in Asbuton is hard, having very low penetration properties and a very high viscosity. In order to facilitate mixing and binding with aggregates in asphalt mixtures, viscosity of the natural asphalt should be reduced. In the process of reducing viscosity, a rejuvenator is used so that the asphalt has suitable characteristics as a binder in the asphalt mixture [13]. This process is known as "rejuvenation" [14]. A mixture using Asbuton and petroleum asphalt is mixed with granular Asbuton that has been extracted, resulting in better performance [15]. Compared to conventional asphalt mixtures, hot mix using asphalt modification of Asbuton has better resistance to damage based on its moisture sensitivity [16]. However, its use requires a complicated process to allow softening of the natural asphalt to take place before compaction and asphaltting can begin. The asphalt softening process by rejuvenation is done by storing loose coated asphalt mixtures in stockpiles, a lengthy process which takes several days [17].

Application in the field causes problems in stockpiling during the curing period. It is necessary to limit the pile height to avoid densification of the loose asphalt mixture at the bottom of the pile. Therefore, the process requires large storage surface space. The maximum water content of the mixture is 0.1% by weight of Asbuton grains [18], requiring an elevation of the stockpile area to avoid inundation. This requires additional labor, if the stacking is done on the side of the road to be paved, and can also disrupt traffic. Therefore, another scenario is needed to ensure a more effective and efficient implementation method.

A new hypothesis has been considered to assess the impact from curing time and compaction method in the laboratory. Two scenarios were subsequently considered, namely: Scenario 1) Cold compaction, and Scenario 2) Hot compaction. Information about the time required for the rejuvenator to soften the asphalt in Asbuton [7], [17] was obtained in both scenarios (cold and hot compaction).

Scenario 1) Cold compaction: The treatment scenario in the laboratory was adjusted to reproduce the implementation plan in the field. As stated previously, a loosely coated HMAA mixture would be cured for a few days before being spread and compacted at the site. This is the current method commonly used but creates problems related to allocating storage space (land) for curing. In the

laboratory, specimens were prepared by compacting HMAA in cold conditions (ambient temperature). Before compaction, the HMAA was cured for several days. After curing for several days, the HMAA was compacted at ambient temperature and tested. This is intended so that Asbuton asphalt can be softened with a rejuvenating agent, so that it is characterized as a binder in asphalt mixtures. Furthermore, the asphalt mixture can be leveled and compacted at cold temperatures [19]. The Buton Granular Asphalt Mineral (Asbuton) grading method for the design of cold mix asphalt is widely used in Indonesia [20].

Scenario 2) Hot compaction: HMAA specimens were prepared and compacted in hot conditions, which is similar to that of conventional HMA. In this approach, the loosely coated HMAA is immediately compacted (without curing). This is based on the finding that Marshall stability and compaction volumetric properties are affected by the compaction temperature of the asphalt mixture [21]. The decrease in air voids in the mixture occurs when the compaction temperature is increased. Alternately, a lower compaction temperature results in a decrease in the adhesion between aggregates due to an increase in asphalt viscosity [22]. The compacted HMAA specimens were subsequently conditioned over time before testing was carried out. The approach of immediately spreading and compacting fresh loosely coated HMAA at the job site has not been done before. In this new approach, after compaction is complete, traffic closures must be carried out for several days until optimal asphalt mix performance is achieved. In this new approach, after compaction is complete, traffic closures must be carried out for several days until optimal asphalt mix performance is achieved.

This study aims to provide an alternative method of carrying out road pavement work using Asbuton. The results of this research can be used as a reference in the implementation of road pavement work using Asbuton related to curing time and compaction method. The primary goal was to develop a shorter processing time of HMAA without compromising the performance of the road pavement. Thus, the methodology adopted for this study: (1) the relationship between curing time and the density of the Asbuton mixture compacted under hot and cold conditions was explored; (2) Then the relationship between curing time and the volumetric and Marshall characteristics of the Asbuton mixture compacted under hot and cold conditions was also investigated; (3) Finally, the impact from curing time on HMAA performance was evaluated; (4) Furthermore, a recommendation of compaction methods and curing time was proposed for the implementation of HMAA for road surface pavement layers.

2. Materials and Methods

2.1. Experimental Design

The research was conducted on Marshall test objects

(specimen). Manufacture of specimen began with material preparation, mixing and compaction in the mold. At the preparation stage, it began with testing the mixed materials, then preparing the required amount based on the composition of the mix design. The specimen compaction process was carried out in two scenarios. Scenario 1 (cold compaction) with the process in Figure 1, and Scenario 2 (hot compaction) with the process as shown in Figure 2.

2.2. Material

HMAA mixture consisted of 1) Aggregates (coarse aggregate, fine aggregate, filler); 2) Asbuton; and 3) Rejuvenator additive (petroleum asphalt, kerosene, and bunker oil). The Asbuton and aggregates used are shown in Figure 3. The rejuvenator additive is shown in Figure 4.

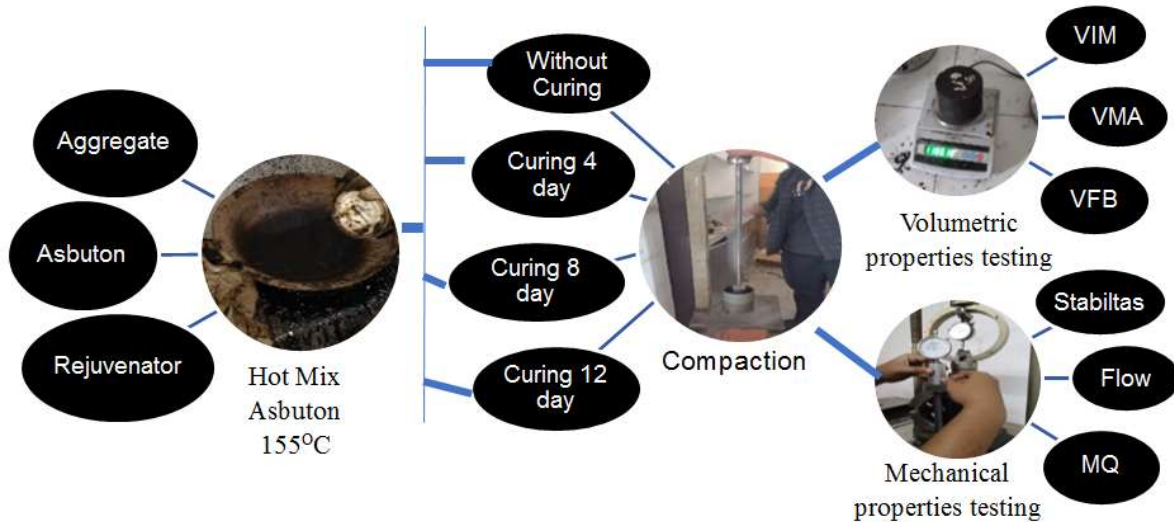


Figure 1. Preparation and testing of specimens under scenario 1 (compacting after curing)

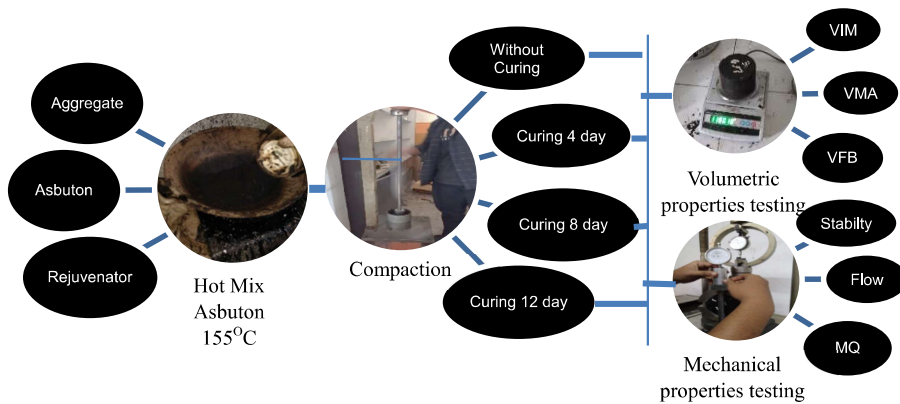


Figure 2. Preparation and testing of specimens under scenario 2 (curing after compaction)



Figure 3. Coarse aggregate, fine aggregate, filler and Asbuton

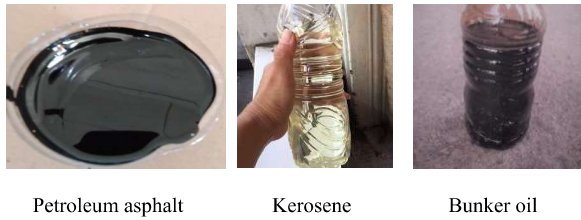


Figure 4. Rejuvenator Material

Grading of the combined aggregates used in each scenario was previously tested and reported. The rejuvenating additive comprised 63% petroleum asphalt (penetration 60/70), 22% kerosene, and 15% bunker oil [17], having a liquid state at room temperature.

2.3. Mixing the HMAA Specimens

Sampling began with the preparation of the materials according to their composition. One test object used 1,200 grams of mixture, so the amount of each material was 846 grams (70.5%) aggregate, 300 grams (25%) Asbuton, and 54 grams (4.5%) rejuvenator [17]. So that the asphalt content in the mixture is 7.91%, namely from Asbuton = 25% x 20.31% = 5.07% and from rejuvenator = 63% x 4.5% = 2.84%. Asbuton and aggregate were initially heated at a temperature of 165°C and subsequently, rejuvenator was added and stirred until the loose coated HMAA mixture was homogeneous.

The specimen compaction process was carried out as per the two scenarios described in the hypothesis. Scenario 1 (cold compaction): following completion of mixing, the HMAA mixture is left for a certain time at an ambient temperature of 25-30°C. Compaction of the cold HMAA specimens was carried out at different curing times. Five specimens were compacted immediately (without curing) whilst the other five specimens were compacted after curing at ambient temperature for 4, 8, and 12 days, then tested. These specimens were subsequently subjected to volumetric and mechanical testings (see Figure 1, illustrating the process for Scenario 1).

Scenario 2 (hot compaction): following completion of mixing, the loosely coated HMAA mixture was immediately compacted at 155 °C. After compaction, these specimens were subjected to different curing times. Five specimens were immediately tested and the remaining five specimens each was tested after curing for 4, 8, and 12 days. The tests carried out were the same as those in Scenario 1, as illustrated in Figure 2.

2.4. Specimen Testing and Data Analysis

The assessment of volumetric properties consisted of void in mix (VIM), void in mineral aggregate (VMA), and void in filled with bitumen (VFB). The data for calculating volumetric and density characteristics were: dry weight of the specimen (Ma), saturated surface dry (Mssd) and in

water (Mw), diameter (d) and height (h) of the specimen. Other data were bulk specific gravity of the aggregate (Gsb), the maximum specific gravity of asphalt mixtures (Gmm), and the bulk specific gravity of compacted specimens (Gmb) and percentage (by mass) of aggregate in the total mixture (Ps) [23]–[25]. For calculation of the value of density (D) [26], VIM, VMA and VFB, equations 1-4 can be used [17].

$$D = \frac{4 Ma}{\pi d^2 h} \quad (1)$$

$$VIM = 100 \left(\frac{Gmm \times Gmb}{Gmm} \right) \quad (2)$$

$$VMA = 100 - \frac{Gmb \times Ps}{Gsb} \quad (3)$$

$$VFB = \frac{100 (VMA - VIM)}{VMA} \quad (4)$$

Meanwhile, the data for the determination of Marshall characteristics are: 1) Reading of the stability value on the proving ring dial (s), 2) Marshall calibration value (k); The test object correction number (kb) and the reading of the flow value on the proving ring dial (f). Calculation of the value of stability, flow and Marshall Quotient, using equations 5-7 [17].

- Stability (MS), in kg

$$MS = s \times k \times kb \quad (5)$$

- Flow (MF), in mm

$$MF = \frac{f}{100} \quad (6)$$

- Marshall Quotient (MQ), in kg/mm

$$MQ = \frac{MS}{MF} \quad (7)$$

3. Results and Discussion

3.1. Gradation and Aggregate Test Results

The properties of the aggregates used are shown in Table 1. The mixing gradation of Scenario 1 (cold compaction) and Scenario 2 (hot compaction) with the limitation of using gradation sizes (top and bottom) according to specifications [18] is shown in Figures 5-6.

Table 1. Aggregate properties for Asbuton mixture

Test	Requirement [16]	Coarse	Fine	Filler
Specific gravity	Min. 2.5	2.55	2.51	2.55
Saturated surface dry density	Min. 2.5	2.62	2.57	-
Apparent density	Min. 2.5	2.75	2.68	2.6
Absorption (%)	Max. 3.0	2.87	2.48	0.74
Aggregate adhesiveness to bitumen (%)	Min. 95	98	-	-
Impact Wear (%)	≤ 30	21.91	-	-

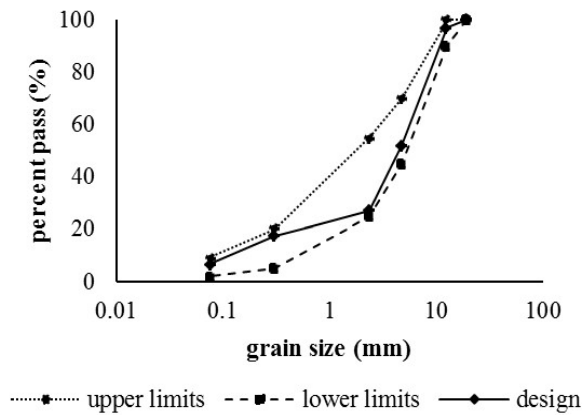


Figure 5. Gradation of aggregate scenario 1

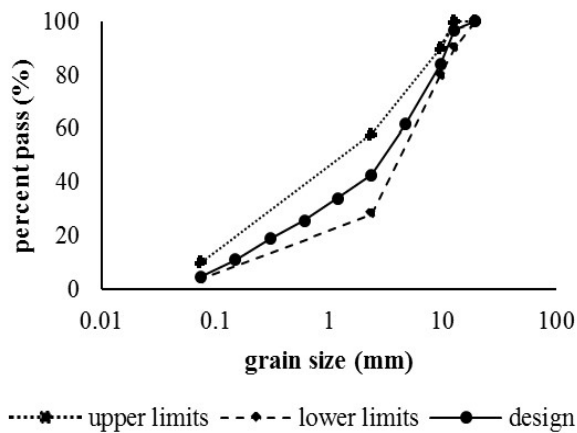


Figure 6. Gradation of aggregate scenario 2

3.2. Type of Asbuton Used and Test Results

Buton Granular Asphalt (BGA) with grain size smaller than 1.18 mm is categorized into several types, namely: type 5/20, 15/20, 15/25, and 20/25. The first number indicates the hardness (penetration) and the second number indicates the bitumen content. The Asbuton used was Type B 5/20. Asbuton characteristics based on testing are shown in Table 2. The added petroleum asphalt (penetration 60/70) has properties as shown in Table 3.

Table 2. Properties of Asbuton B 5/20

No.	Test type	Requirement [16]	Test result
1	Bitumen content	18 – 22%	20.31%
2	Grain size		
	Pass sieve No. 4 (6.35mm)		100%
	Pass sieve No. 8 (2.38mm)	100%	99%
	Passed sieve No.16 (1.19 mm)	≥ 95 %	72.7%
	Passed sieve No.30 (0.59 mm)		51.4%
3	Water content	≤2%	0.74%
4	Penetration at 25°C, 5 sec, 0.1 mm	≤10	

Table 3. Properties of asphalt penetration 60/70

No.	Test Type	Specification [16]	Test Result
1	Penetration 25°C (0.1 mm)	60-79	62.25
2	Softening point (°C)	48-58	52.50
3	Flash point (°C)	Min. 200	>300
4	Ductility on 25°C (cm)	Min. 100	124.95
5	Specific gravity	Min. 1,0	1.06
6	Weight loss (%)	Max. 0,8	0.06
7	Penetration 25°C, after losing the original weight (%)	Min. 65	66.5
8	Ductility on 25°C, after weight loss (cm)	Min. 50	108

3.3. HMAA and Curing Specimen

The treatment conditions for the two scenarios are shown in Figure 7. Figure 7 a) shows the HMAA mixture being cured before being transferred to the compaction mold, while Figure 7 b) is the curing of the compacted HMAA specimens.



Figure 7. Asbuton mixture and specimens in the curing process

3.4. HMAA Density

Figure 8 (The relationship between specimen density and curing time), shows that Scenario 1 (cold compaction) has a lower density than Scenario 2 (hot compaction). This shows that compaction is better if it is carried out when the temperature of the mixture is still high. The increase in curing time showed that the density of the mixture increased up to eight days, thereafter, there was no visible change.

The density of specimens with cold compaction (Scenario 1) did not seem to have changed much with time. This indicates a very slow increase in density gains and the need for longer curing time before compaction. It is expected that a mixture that has a higher density value will be able to withstand a greater load, as compared to a mixture that has a lower density [27]. Density value affects Marshall stability and volumetric properties of the asphalt mixture [26].

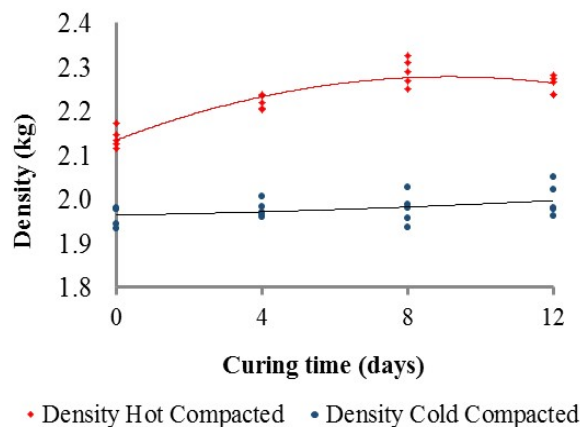


Figure 8. Specimen density based on curing time

3.5. Asbuton Mixture Volumetric Properties

In cold compaction (Scenario 1) and hot compaction (Scenario 2), the VMA value decreases. The longer the curing, the higher the softening of the Asbuton, which can facilitate filling of the voids. This means that the VMA cavity is filled with asphalt, (FVB) increases, according to Figure 9. However, after day eight of Scenario 2, the VMA value did not change much. This may indicate that the Asbuton softening process had stopped.

In VIM the same phenomenon occurred, namely the longer the curing time, the smaller the VIM value, due to the softer Asbuton.

In VIM, the same phenomenon also occurred, namely the longer the curing time, the softer the asphalt in Asbuton. This resulted in more voids filled with asphalt, so the VIM value tends to decrease [28]. Asphalt fills the VMA due to a thickening of the asphalt film from softened Asbuton. Thus, the mixture becomes tight. This occurred in Scenarios 1 and 2, except after day eight for Scenario 2 when the VIM value did not seem to have changed much.

VMA and VIM values were higher in Scenario 1 specimens than those in Scenario 2 specimens. This shows that compaction at high temperatures facilitates superior densification, leading to smaller voids because the asphalt binder viscosity was lower. Nonetheless, Scenario 1 shows that extended curing can improve the performance of the mixture in terms of voids, both VMA and VIM. This means that the longer the mixture is cured prior to compaction, the better the densification of the mixture, leading to smaller voids formed. This is an effect of the asphalt content in the mixture. Compaction of the mixture becomes easy when the asphalt content is high, so the air voids are low. On the other hand, it is difficult to compact if the asphalt content is too low because the mixture is solid [29]. The relationship between the voids formed in the HMAA and the curing time is shown in Figure 9.

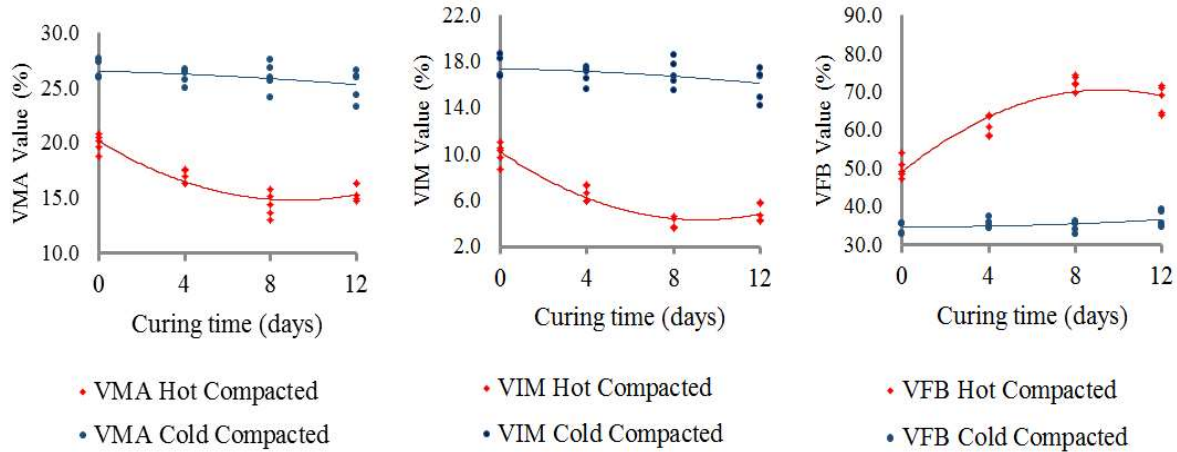


Figure 9. Relationship of voids with curing time

Table 4. Volumetric properties of test results based on curing time

Properties	Requirement [16]	Curing Time				Interval (days)
		Without	4 days	8 days	12 days	
Scenario 1						
VIM (%)	4-10					not any
VMA (%)	>15%					all
VFB (%)	>60%					not any
Scenario 2						
VIM (%)	3.5-5.5					8 and 12
VMA (%)	>15%					all
VFB (%)	>65					8 and 12

Based on the void properties of the test results in Figure 9, for Scenario 1 (cold compaction) and Scenario 2 (hot compaction), it can be determined the length of curing time with mixed performance meets the requirements in Table 4.

In Table 4 it can be seen that in cold compaction (Scenario 1), the preservation of the mixture before compaction as a specimen is only fulfilled for the VMA properties, for all curing times. However, the VIM formed is too large, probably because the asphalt binder has not fully coated the aggregate and filled the VMA, leading to the low VFB value. Meanwhile, with hot compaction (Scenario 2), treatment after compaction, all properties were met on the 8th and the 12th days. Whereas, VMA is fulfilled for all curing times. This means that the compacted mixture can be opened to carry the traffic load from day eight, after compaction.

3.6. Marshall Properties of the Asbuton Mixture

Marshall properties of Asbuton mixture (stability, flow and MQ), calculated by equations 4-6, are based on specimen test data. The properties of asphalt mixtures

depend on the role of asphalt as a binder, in addition to aggregate as its main component. For mixture incorporating Asbuton, curing is necessary to allow softening of asphalt in Asbuton, causing it to actively coat and bind to the aggregate.

In Scenario 1 (cold compaction), it was found that the longer the curing time, the higher the stability. A different trend occurred in Scenario 2 (hot compaction), the stability values seemed to reach values above 2,400 kg since day 0. The stability values of Scenario 2 specimens were significantly (more than 10 times) higher than those of Scenario 1 specimens. The stability value is related to the binding force to resist the movement between aggregate grains when loaded with traffic [30].

Figure 10 shows that the flow values of Scenario 2 specimens are higher than those of Scenario 1 specimens. Higher flow value could be associated with poorer deformation resistance. Nonetheless, all specimens met the specification requirements for flow value.

The value of MQ depends on the value of stability and flow. When the MQ value increases, it indicates that the mixture is stiffening, on the contrary if the MQ value decreases, it indicates that the mixture is softening. The

trend in MQ value changes with curing time and follows the same trend as that of stability value. The hope for mixed characteristics can be achieved through good compaction, thereby increasing the material's ability to distribute traffic loads more effectively. Compaction can increase the stiffness of asphalt concrete, so that it is met with high strength, durability, resistance to deformation, resistance to moisture damage, water resistance, and high skid resistance [26]. The results of the HMAA performance data analysis based on the results of the Marshall test are shown in Figure 10.

Based on the mechanical properties of the test results in

Figure 10, for Scenario 1 and Scenario 2, it can be determined the recommended length of curing time based on the mixture performance parameters is shown in Table 5.

Table 5 shows that in cold compaction (Scenario 1), the stability and flow properties were met for all curing times. However, the MQ property is not met, so it is not eligible for use. Meanwhile, with hot compaction (Scenario 2), the results of the specimen test show that the mixture of road pavement can be used (meets the requirements) as a road pavement surface layer.

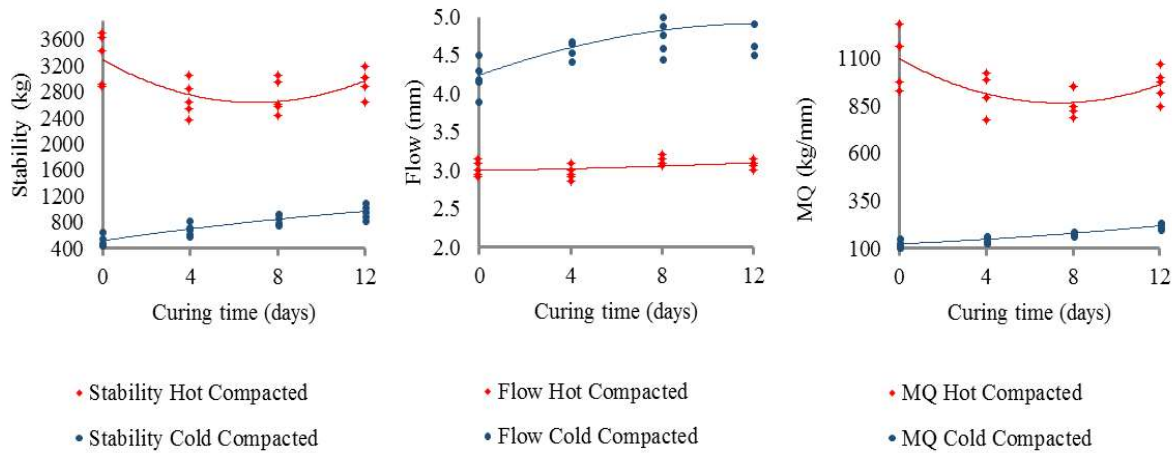


Figure 10. HMAA performance based on curing time

Table 5. Marshall Properties based on test results and curing time

Properties	Requirement [16]	Curing Time				Interval
		Without	4 days	8 days	12 days	
Scenario 1						
Stability (kg)	500					all
Flow (mm)	3-5					all
MQ	250					not any
Scenario 2						
Stability	1000					all
Flow	>3					all
MQ	300					all

3.7. Asbuton Mixed Performance Based on Two Curing Scenarios

Scenario 1: Cold compaction

Analysis of the data based on the results of testing the volumetric properties and mechanical properties showed that the curing of the asphalt mixture before compaction and the specimen from the compaction of the mixture affected the performance of the Asbuton mixture. The properties of the mixture with pre-compacting treatment did not meet the requirements for road pavement materials, namely VIM, VFB, and Marshall Quotient. It was found that the high VIM value and low VFB value were caused by rejuvenation which was not able to soften the hard asphalt contained in Asbuton until the 12th day of curing. Asphalt that is still hard is difficult to enter the mixed voids, resulting in the voids in the mixture enlarging.

Marshall Quotient (MQ) value is an indicator of mixed flexibility value. The value of MQ is used as an estimate of the level of stiffness of the mixture which is strongly influenced by the value of stability and flow. The MQ value in this study did not meet the mixed requirements for road materials because the stability value was low, and the flow value was high. The low stability value is due to the Asbuton mineral grains tendency to not to be cubical, hence having a significant effect on the interfacial adhesion of the aggregate by asphalt. However, the presence of short-term aging is conducive to improving asphalt adhesion [31].

Scenario 2: Hot compaction

The curing time of the specimen after compaction has a very strong relationship with the volumetric characteristics consisting of VMA, VIM, and VFB. The recommended minimum curing time is eight days after compaction. This recommended curing time was based on the volumetric characteristic specifications VMA, VIM, and VFB.

The curing time after compaction also has a very strong relationship with the mechanical properties (Marshall) of the mixture. From the results of this study, the best mechanical characteristics (stability, flow and MQ) were detected immediately (since day 0) after compaction.

Figure 11 shows the positions and values of the eligible properties. Figure 11(a) shows that the characteristics that are met are only VMA, stability and flow. This shows that with curing up to 12 days, the performance has not been met, so it cannot be implemented at the job site (requires longer curing). While in Figure 11(b) it can be seen that the performance is fully fulfilled by curing 8 to 12 days. This means, if implemented in the field, the road should be closed at least eight days after compaction so that the performance of the mixture is optimal. This condition is caused by the effectiveness of asphalt rejuvenation in Asbuton. The strength of the bond between asphalt and aggregate is strongly influenced by the asphalt source [32]. Efforts to improve the performance of the mixture can be done by using anti-stripping materials, which affect the cohesive energy and adhesion, so as to increase stability [33].

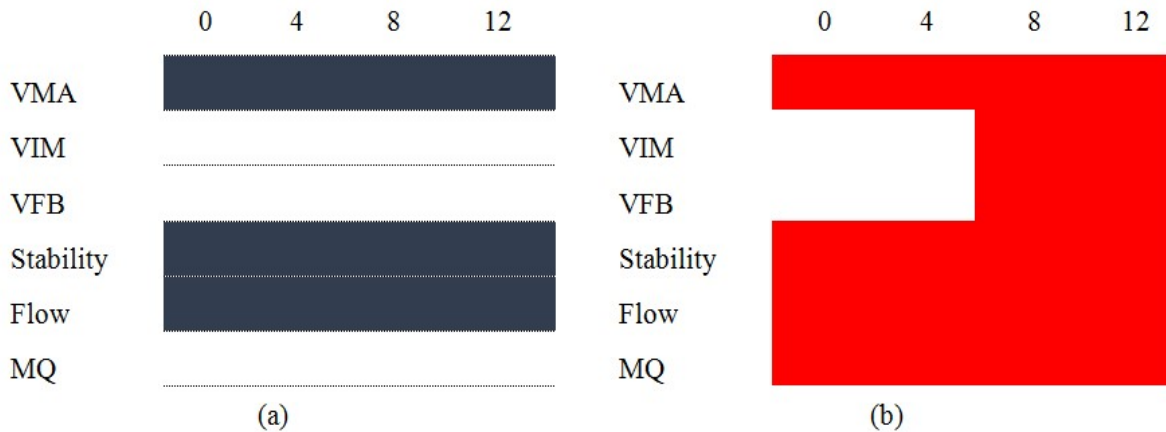


Figure 11. Analysis of properties as surface layer of AC-WC: a) cold compaction, b) hot compaction

4. Conclusions

The curing process for the asphalt rejuvenation (softening) process in Asbuton can increase the density. Where, the density increases with the addition of curing time for hot Asbuton mixture starting on the 4th day, and tends to decrease on the 12th day. Meanwhile, for cold compaction, the tendency is increasing.

In Scenario 1, for all curing time variations, only the VMA volumetric characteristics (>15%) were met. However, VIM (outside the 4%-10% interval) and VFB (<60%), so the requirements were not met.

In Scenario 2, the VMA value (>15%) was met for the entire curing time, but the VIM (requirement 3.5%-5.5%) and VFB (requirement >65%) were only met on the 8th and 12th curing days.

The recommendation for implementation in the field is to follow Scenario 2 which is to compact the HMAA immediately after mixing, but with a provision to close traffic for the first eight days to allow for stabilization of the new road surface.

While the recommendation for further research is the treatment of materials and mixtures to be able to carry out scenario 2 so that the post-compacting road closure is less than 8 days.

Acknowledgments

This paper was written with data from the Research on Capacity Building with the support fund of PNBP - University of Mataram in 2021. Authors acknowledge University of Mataram, in particular the Institute for Research and Community Service at the University of Mataram (LPPM-Unram) for the support to facilitate this study.

REFERENCES

- [1] M. Varuna, G. Bhavani Prasad, A. Venkateshappa, and M. S. Amarnath, "Influence of RAP and Waste Plastic on Cracking Resistance of Warm SMA Mixes," *Civ. Eng. Archit.*, vol. 10, no. 1, pp. 79–87, 2022, doi: 10.13189/cea.2022.100107.
- [2] H. Yuliana, I. D. M. A. Karyawan, S. Murtiadi, J. J. Ekaputri, and E. Ahyudanari, "The Effect of Slope Granulator on The Characteristic Of Artificial Geopolymer Aggregate," *J. Eng. Sci. Technol.*, vol. 14, no. 3, pp. 1466–1481, 2019.
- [3] I. D. M. A. Karyawan, J. J. Ekaputri, I. Widyatmoko, and E. Ahyudanari, "The Effects of Na₂SiO₃/NaOH Ratios on the Volumetric Properties of Fly Ash Geopolymer Artificial Aggregates," 2019.
- [4] I. D. M. A. Karyawan, E. Ahyudanari, and J. J. Ekaputri, "Potential Use of Fly Ash Base-Geopolymer as Aggregate Substitution in Asphalt Concrete Mixtures," *Int. J. Eng. Technol.*, vol. 9, no. 5, pp. 3744–3752, 2017, doi: 10.21817/ijet/2017/v9i5/170905005.
- [5] I. D. M. A. Karyawan, I. Widyatmoko, J. J. Ekaputri, and E. Ahyudanari, *Texture and Skid Resistance of Asphalt Concrete Surface Course Incorporating Geopolymer Artificial Aggregates*. Springer International Publishing, 2022.
- [6] Y. Li, J. Chen, J. Yan, and M. Guo, "Influence of Buton Rock Asphalt on the Physical and Mechanical Properties of Asphalt Binder and Asphalt Mixture," *Adv. Mater. Sci. Eng.*, vol. 2018, 2018, doi: 10.1155/2018/2107512.
- [7] BAI PT. Putindo Bintech, "BRA B 5/20 (Buton Rock Asphalt)." [Online]. Available: <http://bai.co.id/produk-aspal-buton-BRA.php>.
- [8] G. Rusbintardjo, M. R. Hainin, and N. I. Nur, "Improvement in properties of expansive clay by stabilizing with Buton Rock Asphalt," *J. Teknol.*, vol. 73, no. 4, pp. 111–116, 2015, doi: 10.11113/jt.v73.4303.
- [9] R. Hidayatulloh, I. D. M. A. Karyawan, and E. Ahyudanari, "Effect of Incorporating Super Bond Additives on Volumetric and Mechanical Characteristics of Cold Mix Asphalt Concrete using Asbuton," *J. Tek.*, vol. 15, no. 2, pp. 130–136, 2021.
- [10] S. P. Hadiwardoyo, F. N. P. Imansyah, R. J. Sumabrata, and D. Iskandar, "Rut depth characteristics on hot mix asphalt with addition nano crumb rubber," *Civ. Eng. Archit.*, vol. 8, no. 4, pp. 525–532, 2020, doi: 10.13189/cea.2020.080416.
- [11] S. P. Hadiwardoyo, O. Senawibowo, R. Jachrizal Sumabrata, and D. Iskandar, "Laboratory investigation on skid resistance of hot mix asphalt pavement with nano crumb rubber contribution," *Civ. Eng. Archit.*, vol. 8, no. 4, pp. 662–668, 2020, doi: 10.13189/cea.2020.080430.
- [12] M. Arifuzzaman, U. Gazder, M. S. Islam, and A. Al Mamun, "Prediction and sensitivity analysis of CNTs-modified asphalt's adhesion force using a radial basis neural network model," *J. Adhes. Sci. Technol.*, vol. 34, no. 10, pp. 1100–1114, 2020, doi: 10.1080/01694243.2019.1698201.
- [13] Kementerian Pekerjaan Umum, "Technical Specification Guidelines for Mixed Asphalt With Asbuton, SE Minister of Public Works No. 10/SE/M/2013 (in Indonesian)." Kementerian Pekerjaan Umum Republik Indonesia, Jakarta, 2013.
- [14] Y. Astor, A. M. S. Sufanir, and W. Z. Utari, "The characteristics of Asphalt Concrete-Wearing Course (AC-WC) mixture using Buton Rock Asphalt (BRA) with Oily Sludge (OS) as a rejuvenator," *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 732, no. 1, pp. 0–7, 2020, doi: 10.1088/1757-899X/732/1/012029.
- [15] K. A. Zamhari, M. Hermadi, and M. H. Ali, "Comparing the performance of granular and extracted binder from Buton Rock Asphalt," *Int. J. Pavement Res. Technol.*, vol. 7, no. 1, pp. 25–30, 2014, doi: 10.6135/ijprt.org.tw/2014.7(1).25.
- [16] S. P. Hadiwardoyo and H. Fikri, "Use of Buton Asphalt Additive on Moisture Damage Sensitivity and Rutting Performance of Asphalt Mixtures," *Civ. Environ. Res.*, vol. 3, no. 3, pp. 100–109, 2013.
- [17] I. D. M. A. Karyawan, R. Yuniarti, D. Widianty, H. Hasyim, and M. Wahyudi, "Performance of Asphalt Mixture with

- Asbuton Based on Marshall Characteristics Compacted at Hot and Cold Temperatures,” *J. Penelit. Pendidik. IPA*, vol. 7, no. 4, pp. 549–555, 2021, doi: 10.29303/jppipa.v7i4.884.
- [18] Kementerian Pekerjaan Umum dan Perumahan Rakyat, *General Specifications of Bina Marga 2018 for Road and Bridge Construction Works (in Indonesian)*. Jakarta: Kementerian Pekerjaan Umum dan Perumahan Rakyat, Direktorat Jenderal Bina Marga, 2018.
- [19] S. Gusty, M. W. Tjaronge, N. Ali, and R. Djameluddin, “Experimental Study On The Durability Of Hotmix Cold Laid Asbuton As Asphalt Porous with Cantabro Test,” vol. 2016, no. Isid, pp. 347–350, 2018, doi: 10.31227/osf.io/jzvx9.
- [20] L. One, M. W. Tjaronge, R. Irmawaty, and M. Hustim, “Effect of buton granular asphalt gradation and cement as filler on performance of cold mix asphalt using limestone aggregate,” *J. Eng. Sci. Technol.*, vol. 15, no. 1, pp. 493–507, 2020.
- [21] Y. Gao, X. Huang, and W. Yu, “The compaction characteristics of hot mixed asphalt mixtures,” *J. Wuhan Univ. Technol. Mater. Sci. Ed.*, vol. 29, no. 5, pp. 956–959, 2014, doi: 10.1007/s11595-014-1027-z.
- [22] N. N. Luxman *et al.*, “Effect of compaction temperature on porous asphalt performance,” *IOP Conf. Ser. Earth Environ. Sci.*, vol. 244, no. 1, 2019, doi: 10.1088/1755-1315/244/1/012011.
- [23] E. Gashi, H. Sadiku, and M. Misini, “A Review of Aggregate and Asphalt mixture Specific Gravity measurements and their Impacts on Asphalt Mix Design Properties and Mix Acceptance,” *Int. J. Adv. Eng. Res. Sci.*, vol. 4, no. 5, pp. 195–201, 2017, doi: 10.22161/ijaers.4.5.31.
- [24] “Theoretical Maximum Specific Gravity.” [Online]. Available: <https://pavementinteractive.org/reference-desk/testing/asphalt-tests/theoretical-maximum-specific-gravity/>.
- [25] D. Goulias and G. Awoke, “State Highway Administration Establish Correlation between Aggregate Properties and Pavement Friction,” 2011.
- [26] A. A. Mohamed and M. Boulbibane, “Effect of Asphalt Mixture Compaction on Stability and Volumetric Properties of ACW14,” 2011, [Online]. Available: https://www.researchgate.net/publication/275020467_Effect_of_Asphalt_Mixture_Compaction_on_Stability_and_Volumetric_Properties_of_ACW14.
- [27] H. Subroto, *Asphalt Technology Integrated into Road Engineering for the Tropics*. 2014.
- [28] R. Yuniarti, “Resistance to degradation of porous asphalt mixture using pine resin as asphalt modifier,” *Jordan J. Civ. Eng.*, vol. 13, no. 1, pp. 113–123, 2019.
- [29] A. M. Zaltuom, “A Review Study of The Effect of Air Voids on Asphalt Pavement Life,” 2018.
- [30] N. Khairini, “Asphalt Concrete Mix Performance-Wearing Course (AC-WC) using Concrete Waste as Course Aggregate with the Addition of Wetfix-Be,” vol. 198, no. Issat, pp. 259–264, 2020, doi: 10.2991/aer.k.201221.044.
- [31] J. Li, Z. Wang, and M. Jia, “Comprehensive analysis on influences of aggregate, asphalt and moisture on interfacial adhesion of aggregate-asphalt system,” *J. Adhes. Sci. Technol.*, vol. 35, no. 6, pp. 641–662, 2021, doi: 10.1080/01694243.2020.1816792.
- [32] X. Liu, X. Zou, X. Yang, and Z. Zhang, “Effect of material composition on antistripping performance of SBS modified asphalt mixture under dry and wet conditions,” *J. Adhes. Sci. Technol.*, vol. 32, no. 14, pp. 1503–1516, 2018, doi: 10.1080/01694243.2018.1426973.
- [33] W. Wang, A. Shen, X. Yang, Y. Guo, and T. Zhao, “Surface free energy method for evaluating the effects of anti-stripping agents on the moisture damage to asphalt mixtures,” *J. Adhes. Sci. Technol.*, vol. 34, no. 18, pp. 1947–1970, 2020, doi: 10.1080/01694243.2020.1742077.