


# Journal of Engineering Science and Technology (JESTEC)

- [Home](#)
- [Editorial Board](#)
- [Submit a paper](#)
- [Indexing and Awards](#)
- [Reviewers](#)
- [Articles in Press](#)
- [Publication Ethics](#)
- [Archives](#)



WEB OF SCIENCE™

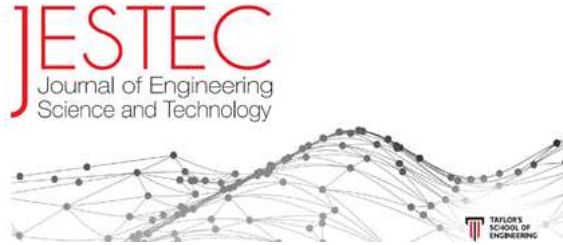

- **Editor-in-Chief**  
**Assoc Prof Dr Abdulkareem Sh. Mahdi Al-Obai**  
Taylor's University, Malaysia
- [Editorial Board](#)

Journal of Engineering Science and Technology (JESTEC) indexed by [SCOPUS](#) since 2010.

Journal of Engineering Science and Technology has been selected for coverage in [Clarivate Analytics products and services](#).

Beginning with 2016, this publication will be indexed abstracted in:

[Emerging Sources Citation Index \(ESCI\)](#)

**ISSN: 1823-4690**

## Aims and Scope

JESTEC (Journal of Engineering Science and Technology) is a peer-reviewed journal that aims to publish and disseminate original research articles latest developments in all fields of engineering science and technology. The journal publishes original papers in English, which contribute to understand engineering science and improving engineering technology and education. The articles may be theoretical (including computational), experimental both. The contribution should be unpublished before and not under consideration for publication elsewhere.

JESTEC maintains a standard double-blind peer-review process. The double-blind process means that the author and the reviewer's identity is not known to each other.

JESTEC is an Open Access journal and does not charge readers or their institutions to access the journal articles. Open access supports rights to read, download, copy, distribute, print, search, or link to these articles' full texts, provided they are properly acknowledged and cited. JESTEC publishes six issues per year.

The publication fees in JESTEC include submission, reviewing, editing, publishing, and uploading the accepted article to the JESTEC website. All these services, JESTEC charges USD375 or MYR1550 per paper (inclusive 6% SST). The number of pages per paper should be a minimum of 10 pages and a maximum of 15-18 pages.

## Subscriptions and enquiries

Contact the [Executive Editor](#)

## Aims & Scope

[Home](#)

[Editorial Board](#)

[Submit a paper](#)

[Indexing and Awards](#)

[Reviewers](#)

[Articles in Press](#)

[Publication Ethics](#)

[Archives](#)



Copyright ©2006-2023 by: School of Engineering, Taylor's University

# Journal of Engineering Science and Technology (JESTEC)

[Home](#)

[Editorial Board](#)

[Submit a paper](#)

[Indexing and Awards](#)

[Reviewers](#)

[Articles in Press](#)

[Archives](#)

## Archive

**JESTEC**  
Journal of Engineering  
Science and Technology



**Volume 14, Issue 3, June 2019**

**Page 1118 - 1763**

[Analysis of gamma irradiation effects on dielectric parameters of SJR-EPDM blends](#)

R. Deepalaxmi, V. Rajini, C. Vaithilingam, S. Vijayalakshmi  
1118 - 1137

[Android-based learning media in contextual teaching and learning on Japanese language reading](#)

F. Philyanti, N. Haristiani, Y. Rasyid, Emzir  
1138 - 1149

[Event-related potential N100 vs. N170 wave results comparison on driving alertness](#)

H. M. Nasir, M. M. M. Aminuddin, N. M. A. Brahin, I. Mustafa  
1150 - 1160

[Study of the influence of coiling-uncoiling induced residual stresses on the fatigue behavior of truck frame rail sections](#)

Chinnaraj K., Sathya Prasad M., Lakshmana Rao C., Padmanaban R.  
1161 - 1172

[Relay selection on device-to-device-assisted full-duplex non-orthogonal multiple access: System model and performance analysis](#)

H.-P. Dang, M.-S. V. Nguyen, D.-T. Do, H.-L. Pham  
1173 - 1186

[Multi-criteria design of mechanical system by using visual interactive analysis tool](#)

D. H. Minh, P. V. Binh, B. V. Phuong, D. Vn  
1187 - 1199

[Energy-aware on-demand fuzzy-unequal clustering protocol for wireless sensor networks](#)

D. R. Das Adhikary, D. K. Mallick  
1200 - 1219

[The effect of seashell waste on setting and strength properties of class c fly ash geopolymer concrete cured at ambient temperature](#)

A. Wardhono  
1220 - 1230

[Sparse based image fusion using compact sub-dictionaries](#)

K. Ashwini, R. Amutha  
1231 - 1247

[Smartphone usage among college students](#)

H. Soegoto  
1248 - 1259

[Business-information systems strategic alignment readiness maturity level: Corporate and business-technology driver perspective](#)

A. Wahyudin, R. Desmayanti, Munir, H. B. Santoso, Z. A. Hasibuan  
1260 - 1270

[Learning obstacle in geometry](#)

A. Cesaria, T. Herman  
1271 - 1280

[Slow learner errors analysis in solving integer problems in elementary school](#)

A. Sovia, T. Herman  
1281 - 1288

[Assessment of phosphorus load in water river using substance flow analysis \(SFA\) methods](#)

L. A. Ghani, N. Z. Mahmood, F. Othman  
1289 - 1300

[Removal of fluoride from wastewater by calcined gypsum: Adsorption and kinetics study](#)

H. I. Al-Itawi

1301 - 1313

[Comparative study of different seismic codes for reinforced concrete buildings in northern Cyprus using static and dynamic methods](#)

R. Resatoglu, M. K. A. Hamed

1314 - 1329

[Buckling load maximization of composite laminate using random search algorithm considering uniform thickness and variable thickness approach](#)

N. S. Kulkarni, V. K. Tripathi

1330 - 1343

[Potential application of acoustic emission technique for weld structure integrity monitoring under dynamic loading](#)

S. V. Ranganayakulu, R. K. Buddu, P. V. Sastry

1344 - 1360

[Adaptive mismatched filter design for radar pulse compression](#)

V. Baghel

1361 - 1373

[Decoupled integral LQR controller with anti-windup compensator for MIMO two rotor aerodynamical system \(TRAS\)](#)

S. Al-Haddad, H. Wahid

1374 - 1397

[Performance evaluation of VoIP systems in cloud computing](#)

M. M. Abualhaj, M. M. Al-Tahravi, S. N. Al-Khatib

1398 - 1405

[Distributed energy-efficient and position-aware routing protocol for heterogeneous wireless sensor network](#)

A. M. Saad, H. M. Lahcen

1406 - 1419

[Comparison study of the structural properties of beam-column joints using reactive powder concrete \(RPC\) under reversed cyclic loading](#)

H. M. A. Al-Khuzai, R. S. Atea

1420 - 1433

[Secure and hidden text using AES cryptography and LSB steganography](#)

M. H. Abood, Z. K. Taha

1434 - 1450

[Investigation of mathematical models for hydro-vehicles which cross the liquid surface](#)

O. N. Mayboroda, O. O. Rasstrygin

1451 - 1465

[The effect of slope granulator on the characteristic of artificial geopolymers aggregate used in pavement](#)

A. H. Yuliana, I. D. M. A. Karyawan, S. Murtiadi, J. J. Ekaputri, E. Ahyudanari

1466 - 1481

[Mechanical and durability properties of coir fibre reinforced concrete](#)

A. J. Babafemi, J. T. Kolawole, O. B. Olajusi

1482 - 1496

[Fire risk analysis in FLNG processing facility using Bayesian network](#)

H. A. Ibrahim, P. J. Rao

1497 - 1519

[A review of failure modes of nuclear fuel cladding](#)

M. A. Khattak, A. A. B. Omran, S. Kazi, M. S. Khan, H. M. Ali, S. L. Tariq, M. A. Akram

1520 - 1541

[Design a prototype FPGA model for target detection by radars passive based on synthetic-aperture radar algorithm](#)

M. J. Fadhil, H. M. Farhan

1542 - 1557

[Monitoring and analysis of displacement using InSAR techniques for Gulaba landslide site](#)

A. S. Virk, A. Singh, S. K. Mittal

1558 - 1571

[A comparison of machine learning techniques for Android malware detection using Apache Spark](#)

L. U. Memon, N. Z. Bawany, J. A. Shamsi

1572 - 1586

[Radio frequency connector insertion loss measured from 300 kHz until 8.5 GHz by using network analyser and mechanical calibration kits](#)

T. M. Hui, A. Y. B. Hashim, M. R. Salleh

1587 - 1600

[An optimised support vector machine with ringed seal search algorithm for efficient text classification](#)

W. Sharif, I. T. Y. Yanto, N. A. Samsudin, M. M. Deris, A. Khan, M. F. Mushtaq, M. Ashraf

1601 - 1613

[A hybrid T-type multilevel inverter with a novel modulation strategy for isolated supply electric systems](#)

J. T. Jacob, D. Kirubakaran  
1614 - 1638

[Techo-economic analysis for the production of titanium dioxide nanoparticle produced by liquid-phase synthesis method](#)

R. Ragadhita, A. B. D. Nandiyanto, A. C. Maulana, R. Oktiani, A. Sukmafritri, A. Mahmud, E. Surachman  
1639 - 1652

[Temperature on the effectiveness of Arduino-based portable spectrophotometer with white light-emitting diode \(LED\) as a light source for analyzing solution concentration](#)

A. Sukmafritri, A. B. D. Nandiyanto, R. Oktiani, R. Ragadhita, A. G. Abdullah  
1653 - 1661

[Existence of alum on the effectiveness of extracted Miana leaves on Batik coloring](#)

R. Oktiani, R. Ragadhita, A. B. D. Nandiyanto, A. Sukmafritri, R. Shintabella, I. Widiaty  
1662 - 1671

[Coronal slices segmentation of mri images using active contour method on initial identification of alzheimer severity level based on clinical dementia rating \(CDR\)](#)

R. Supriyanti, A. R. Subhi, Y. Ramadhani, H. B. Widodo  
1672 - 1686

[Towards proposing an electronic information sharing model for the intelligence sector: A methodological framework](#)

T. Alameri, S. Abudulmajeed, A. S. Shibghatullah, M. M. Jaber  
1687 - 1702

[Injection pressure effects on combustion, performance and emission of a compression ignition engine with fish oil biodiesel using titanium and alumina nanoparticle as additive](#)

D. K. Ramesha, L. Bharath, T. D. Kumar, G. Trilok, A. L. Prasad  
1703 - 1716

[Internet-of-things: genesis, challenges and applications](#)

P. Matta, B. Pant  
1717 - 1750

[The performance of attached and suspended growth process in integrated fixed activated sludge](#)

H. A. Mohiyaden, L. M. Sidek, G. Hayder  
1751 - 1763

[Home](#)

[Editorial  
Board](#)

[Submit a  
paper](#)

[Indexing and  
Awards](#)

[Reviewers](#)

[Articles  
in Press](#)

[Archives](#)



## Editorial Board

[Home](#)

[Editorial Board](#)

[Submit a Paper](#)

[Indexing and Awards](#)

[Reviewers](#)

[Articles in Press](#)

[Publication Ethics](#)

[Archives](#)

### **Editor-In-Chief**

▪ **Abdulkareem Shafiq Mahdi Al-Obaidi**, Ph.D.  
Associate Professor, School of Computer Science and Engineering  
Faculty of Innovation and Technology  
Taylor's University  
Taylor's Lakeside Campus  
No. 1 Jalan Taylor's, 47500 Subang Jaya  
Selangor DE  
Malaysia

### **Editors**

▪ **G. Davies**, Ph.D.  
Professor, Dean, Faculty School of Engineering  
The University of New South Wales  
UNSW Sydney  
NSW 2052  
Australia

▪ **Rodney Chaplin**, Ph.D.  
Associate, Professor, Associate Dean (International)  
Faculty of Engineering  
The University of New South Wales  
UNSW Sydney  
NSW 2052  
Australia

▪ **Andrew Ooi**, Ph.D.  
Associate, Professor, Assistant Dean (International)  
School of Engineering  
The University of Melbourne  
Victoria 3010  
Australia

▪ **David WL Hukins**, Ph.D.  
B.Sc., Ph.D. (London), D.Sc. (Manchester), C.Phys., F.Inst.P., F.I.P.E.M., F.R.S.E.  
Professor of Bio-medical Engineering  
Head of Mechanical and Manufacturing Engineering  
School of Engineering  
Mechanical Engineering  
The University of Birmingham  
Edgbaston  
Birmingham  
B15 2TT  
United Kingdom

▪ **Takayuki Saito**, Ph.D.  
Professor, Shizuoka University  
Graduate School of Science and Engineering  
3-5-1 Johoku  
Hamamatsu  
Shizuoka 432-8561  
Japan

▪ **S. B. Chin**, Ph.D.  
Professor, The University of Sheffield  
Mechanical Engineering Department  
Mappin Street, Sheffield  
S1 3JD,  
United Kingdom

▪ **Xiaoyu Luo**, Ph.D.  
Professor, Department of Mathematics  
University of Glasgow  
Glasgow G12 8QW

▪ **Stephen B M Beck**, Ph.D.  
Professor in Mechanical Engineering  
Faculty Director of Learning and Teaching – Engineering  
Department of Mechanical Engineering  
The University of Sheffield  
Mappin Street  
Sheffield  
S1 3JD  
United Kingdom

- **Xiao (Yun) Xu**, Ph.D.  
Professor of Biofluid Mechanics  
Department of Chemical Engineering  
Imperial College  
London  
United Kingdom
- **Seeram Ramakrishna**, Ph.D.  
Professor, Dean, Faculty of Engineering  
Dean's Office, Block EA, #07-26  
9 Engineering Drive 1,  
National University of Singapore,  
Singapore 117576
- **Ramesh Singh Kuldip Singh**, Ph.D.  
Senior Professor of Mechanical and Materials Engineering  
Faculty of Engineering  
University of Malaya, 50603 Kuala Lumpur, Malaysia  
Universiti Teknologi Brunei, BE1410 Gadong, Brunei Darussalam
- **Gary Hawley**, Ph.D.  
Professor of Automotive Engineering  
Dean and Medlock Chair of Engineering,  
Faculty of Engineering and Design  
University of Bath,  
Claverton Down, Bath BA2 7AY  
United Kingdom
- **Yousif Abdall Abakr**, Ph.D.  
School of Mechanical Engineering  
The University of Nottingham, Malaysia Campus  
Jalan Broga, 43500 Semenyih, Selangor  
Malaysia
- **R. Rajesh @ Nithyanandam**, Ph.D, PGChETL, MICheM  
Professor, Department of Chemical Engineering  
Mohamed Sathak Engineering College  
Kilakarai, Tamil Nadu  
(Affiliated to Anna University)  
India
- **Chong Perk Lin**, Ph.D, PgCLTHE, FHEA, CEng, MIMechE  
Senior Lecturer of Mechanical Engineering  
Programme Leader of BEng Tech (Hons) Mechanical Engineering  
School of Computing, Engineering and Digital Technologies  
Teesside University, Middlesbrough, Tees Valley, TS1 3BX,  
United Kingdom.
- **Mohd Faizal Fauzan**, Ph.D.  
Programme Director, Mechanical Engineering  
School of Computer Science and Engineering  
Faculty of Innovation and Technology  
Taylor's University  
Taylor's Lakeside Campus  
No. 1 Jalan Taylor's, 47500 Subang Jaya  
Selangor DE  
Malaysia



# Source details

## Journal of Engineering Science and Technology

Scopus coverage years: from 2009 to Present

Publisher: Taylor's University

ISSN: 1823-4690

Subject area: Engineering: General Engineering

Source type: Journal

CiteScore 2021

1.6



SJR 2021

0.243



SNIP 2021

0.525



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

### i Improved CiteScore methodology



CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. [Learn more >](#)

CiteScore 2021 ▼

$$1.6 = \frac{2,274 \text{ Citations } 2018 - 2021}{1,391 \text{ Documents } 2018 - 2021}$$

Calculated on 05 May, 2022

CiteScoreTracker 2022 ⓘ

$$1.5 = \frac{2,198 \text{ Citations to date}}{1,440 \text{ Documents to date}}$$

Last updated on 05 April, 2023 • Updated monthly

## CiteScore rank 2021 ⓘ

Category	Rank	Percentile
Engineering		
General Engineering	#158/300	47th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

---

## About Scopus

[What is Scopus](#)

[Content coverage](#)

[Scopus blog](#)

[Scopus API](#)

[Privacy matters](#)

## Language

[日本語版を表示する](#)

[查看简体中文版本](#)

[查看繁體中文版本](#)

[Просмотр версии на русском языке](#)

## Customer Service

[Help](#)

[Tutorials](#)

[Contact us](#)

---

## ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies ↗.







PCI Approved Journal

Highest Citation Journal

Publish your paper in Best Pharmacy Journal Within 3 Days

iosrjournals.org

OPEN

# Journal of Engineering Science and Technology

**COUNTRY**

Malaysia



Universities and research institutions in Malaysia



Media Ranking in Malaysia

**SUBJECT AREA AND CATEGORY**

Engineering  
Engineering  
(miscellaneous)

**PUBLISHER**

Taylor's University



Taylor's University in Scimago Institutions Rankings

**H-INDEX**

34

**PUBLICATION TYPE**

Journals

**ISSN**

18234690

**COVERAGE**

2009-2022

**INFORMATION**

[Homepage](#)

[How to publish in this journal](#)

[g.davies@unsw.edu.au](mailto:g.davies@unsw.edu.au)



Connect your team on one platform that costs less than the industry standard



scopus indexed journal no

JETIR Research Journal (

#### SCOPE

JESTEC (Journal of Engineering Science and Technology) is a peer-reviewed journal that aims at the publication and dissemination of original research articles on the latest developments in all fields of engineering science and technology. The journal publishes original papers in English, which contribute to the understanding of engineering science and improvement of the engineering technology and education. Papers may be theoretical (including computational), experimental or both. The contribution should be unpublished before and not under consideration for publication elsewhere.


 Join the conversation about this journal

## Submit paper for publication

How to Publish Paper, free cost publication, ugc care journal policy follow

IJNRD Research Journal

Open

 Quartiles



# Submit paper for publication

How to Publish Paper, free cost publication, ugc care journal policy follow

IJNRD Research Journal

Open

## FIND SIMILAR JOURNALS ?

1  
**Arabian Journal for Science and Engineering**  
DEU

**47%**  
similarity

2  
**Cogent Engineering**  
GBR

**42%**  
similarity


3  
**International Journal of Engineering Research and**  
**Engineering Research and**  
IND

**41%**  
similarity


4  
**Journal of Engin**  
**Applied Science:**  
PAK

**39%**  
similarity


SJR

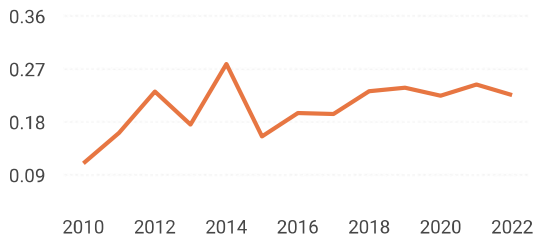


Total Documents

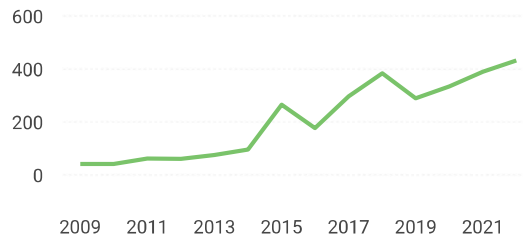


Total Cites Self-Cites

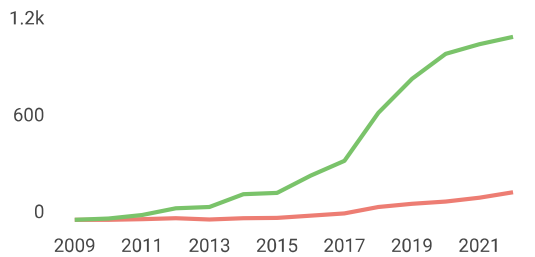


Citations per document

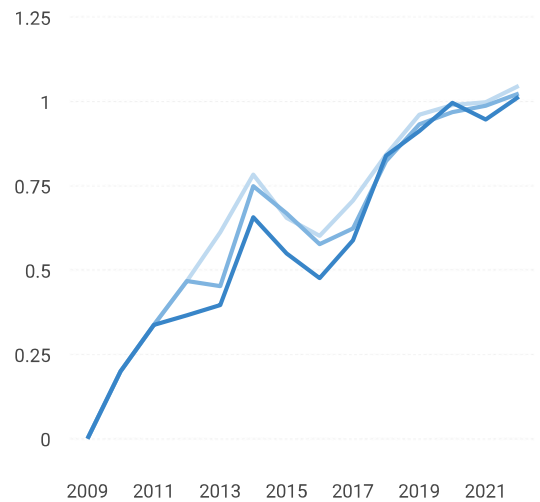

External Cites per Doc Cites per Doc




% International Collaboration

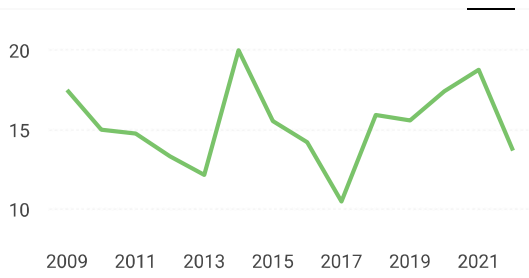


Citable documents

Non-citable documents

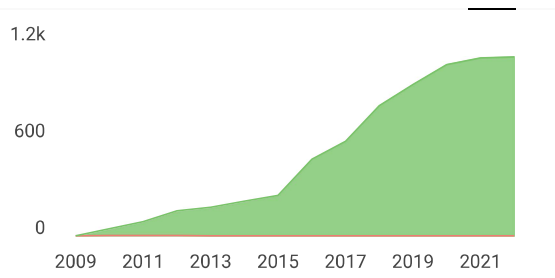

Cited documents

Uncited documents

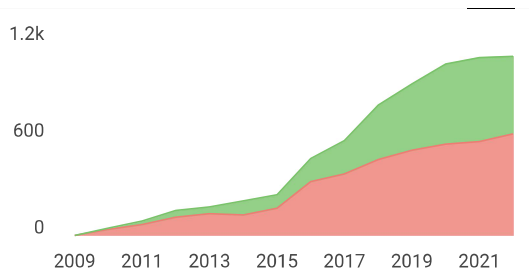

**Journal of Engineering Science and Technology**

Q3 Engineering (miscellaneous) best quartile

SJR 2022 0.23

powered by scimagojr.com


← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimag
```

### SCImago Graphica

Explore, visually communicate and make sense of data with our **new data visualization tool**.



Metrics based on Scopus® data as of April 2023

for the journal

if you can help , contact the journal through you

best regards

asmaa

reply



**Melanie Ortiz** 9 months ago

SCImago Team

Dear Asmaa,

Thank you for contacting us. Unfortunately, SCImago cannot help you with your request.

SJR is committed to help decision-making through scientometric indicators.

Best Regards, SCImago Team

**M** **M.Sivasankara Rao** 2 years ago

present how much time it will take to get acceptance and publication in this journal.

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear M.Sivasankara,

Thank you for contacting us.

Unfortunately, we cannot help you with your request.

Best Regards, SCImago Team

**P** **Ponum Almas** 2 years ago

hello ,

is this impact factor journal ? what is the publication fee for an aticle ? is there any discout for developing countries ?

reply



**Melanie Ortiz** 2 years ago

SCImago Team



Web of Science data source. For further information about this journal, please visit the journal's website or contact directly with the editorial staff.

Best Regards, SCImago Team

D **daus** 2 years ago

this is ecsi journal, not scie

reply



**Melanie Ortiz** 2 years ago

SCImago Team

Dear Daus, thanks for your participation! Best Regards, SCImago Team

K **kartik** 3 years ago

Hi,

Can i know what is the current Quartile ranking for this journal for the year 2020? tq

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Kartik,

Thank you for contacting us. You can consult that information just above. The SJR for 2019 was released on 11 June 2020.

Best Regards, SCImago Team

R **Raghad Hameed Ahmed** 3 years ago

good greeting

What is the time required to obtain a research acceptance letter.

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Raghad,

thank you for contacting us.



homepage or contact the journal's editorial staff , so they could inform you more deeply.  
Best Regards, SCImago Team

D **deepthi** 3 years ago

Hi,

Is it okey to cite an unpublished work can in the manuscript?

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Deepthi, thank you very much for your comment. Unfortunately, we cannot help you with your request, we suggest you contact the journal's editorial staff so they could inform you more deeply. Best Regards, SCImago Team

M **M.K.** 3 years ago

Dear Melanie

I have submitted a paper for this journal about 6 months ago, and I did not receive the decision yet. The problem is the website of this journal does show any contact details except the email of the Executive Editor, who did not respond to my emails since May 2020. Do you know any other contact details for this journal please?

Best regards  
M.K.

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear M.K.,

Thank you for contacting us. Unfortunately, it seems that there is no other email contact shown in their website.

Best Regards, SCImago Team

reply

K **K. Bhatti** 3 years ago

It's 300USD per article.



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Dr. Vijaya,  
thank you for contacting us.  
Unfortunately, we cannot help you with your request, we suggest you visit the journal's homepage or contact the journal's editorial staff , so they could inform you more deeply.  
Best Regards, SCImago Team

W **Waleed** 3 years ago

Why there is no response to our emails? Someone should tell them that other OA journals respond very fast. It is really a negative point about their performance. Pay attention to your costumers.

reply

N **Nibras Khalid** 3 years ago

Hello,  
I submitted a manuscript for publication more than a week ago, but I haven't received a confirmation email of delivery. Is there a way to know if all the required documents have been received??

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Nibras,  
thank you for contacting us.  
Unfortunately, we cannot help you with your request, we suggest you contact the journal's editorial staff , so they could inform you more deeply.  
Best Regards, SCImago Team



P **Phyu Phyu Thin** 3 years ago

---



Engineering Science and Technology.

Thanks

reply

S **sukanto wiryono** 3 years ago

Dear Melanie Ortiz

Please inform me, is this JESTEC indexed by Q2 Scopus?

Thanks you



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Sukanto, thank you very much for your comment, unfortunately we cannot help you with your request. We suggest you to consult the Scopus database directly.

Keep in mind that the SJR is a static image (the update is made one time per year) of a database (Scopus) which is changing every day. The SJR's Quartile for 2018 is available just above.

Best Regards, SCImago Team



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Phyu,  
thank you for contacting us.

We are sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage (See submission/author guidelines) or contact the journal's editorial staff, so they could inform you more deeply.

Best Regards, SCImago Team

B **B G Shivaleelavathi** 3 years ago

Sir/Madam,

i want to submit review paper. what is procedure.

reply

Dear Shivaleelavathi,  
thank you very much for your comment, we suggest you to look for author's  
instructions/submission guidelines in the journal's website. Best Regards, SCImago Team

F **Frans** 3 years ago

I want to know, what is journal not a notification after submitting?  
Thank you

reply

K **kareem** 3 years ago

Dear Scopus people  
I want to if this journal consideder as an ISI journal and what is its impact factor.  
Thanks

reply



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Kareem, SCImago Journal and Country Rank uses Scopus data, our impact indicator  
is the SJR. Check our web to locate the journal. We suggest you to consult the Journal  
Citation Report for other indicators (like Impact Factor) with a Web of Science data  
source. Best Regards, SCImago Team

N **Nacer** 3 years ago

Dear Abdulkareem

Please informe me if the publication is free or not?

Best regards

reply

A **abdulkareem** 3 years ago

no, it is not free, USD300/aper

Dear all  
Could you please tell me what is the impact factor of this journal.  
Best regards

reply



**Melanie Ortiz** 4 years ago

SCImago Team

Dear Nacer, SCImago Journal and Country Rank uses Scopus data, our impact indicator is the SJR. Check our web to locate the journal. We suggest you to consult the Journal Citation Report for other indicators (like Impact Factor) with a Web of Science data source. Best Regards, SCImago Team

**S** **supreetha B.S** 4 years ago

I have published my research work in JESTEC. It is a quality journal with systematic review process. I received review comments from 5 reviewers and I answered all the comments and finally after 2 round review process my paper was accepted. Thanks to Dr. Abdulkareem Sh Mahdi Al-obaidi

reply

**V** **VIJAY B G** 3 years ago

Hello madam, could you please tell me is there any processing charges that you have paid? also suggest some good Scopus indexed journal to publish my paper.  
Thank you



**Sudhakiran Gunda** 3 years ago

Could you please tell me the duration for this entire process.  
I would like to know the time taken for publication.

Thankyou



**Melanie Ortiz** 4 years ago

SCImago Team

Dear Supreetha, thanks for your participation! Best Regards, SCImago Team

Hello there!

I have a little question about the publication process timeline, Can i know please how long will take between sending an article and ( journal answer by acceptance/rejection) and finally the paper's online availability ????

Thanks in advance

reply

K **Khaled** 3 years ago

Thanks alot for your valuable response

Are there any publication fees or not ???????

A **Ali** 4 years ago

Dear khaled

The timeline for publishing in this journal about 2-3 months for final acceptance and may be 9 months for online publication

with my regards



**Melanie Ortiz** 3 years ago

SCImago Team

Dear Ali, thanks for your participation! Best Regards, SCImago Team



**Melanie Ortiz** 4 years ago

SCImago Team

Dear Khaled,

thank you for contacting us.

Sorry to tell you that SCImago Journal & Country Rank is not a journal. SJR is a portal with scientometric indicators of journals indexed in Elsevier/Scopus.

Unfortunately, we cannot help you with your request, we suggest you to visit the journal's homepage or contact the journal's editorial staff , so they could inform you more deeply.

You can see the updated journal's information just above .

Best Regards, SCImago Team

A **ASWANT KUMAR SHARMA** 4 years ago

I have published a paper with JESTEC in a proper time line. It is good if JESTEC provide DOI for article published with them

reply



M **Malathi Kunnudaiyan** 3 years ago

Have paid any fees for the publication sir?



**Melanie Ortiz** 4 years ago

SCImago Team

Dear user, thanks for your participation! Best Regards, SCImago Team

R **rati saluja** 4 years ago

The journal that provides best services, never a single follow up query left unanswered. I had written several research papers in numerous journals, but I feel pride the way "Journal of Engineering Science and Technology" works, they reviewed every mm of my manuscript. Their editing team is soul of the body. Mr. Obaidi shares every detail regarding the review process as well as time duration, that made the process easy. Publishing in a reputed journal takes time, So eagerly waiting for the same.

Thanks a million to Dr. Abdulkareem Sh. Mahdi Al-Obaidi for sharing a wonderful platform to enhance one's knowledge and research.

Hats off

A happy author

reply

M **Melva Silitonga** 4 years ago

This journal template has been used for the 2019 Kyoto APLSBE template that I have participated in, I am interested in the content of this journal and wish for publication in this journal

reply

W **Wajde Alyhya** 4 years ago

Hi

I sent a manuscript for publication in this journal and I received two months later seven reviewers' comments. I answered all their comments, however, I have not received an acceptance or rejection letter till now. I sent more than one emails regarding the status of my manuscript without an answer. I do not know what to do after nearly more than 6 months of waiting.

reply

Dear Wajde

We thank you for the comment.

As you mentioned your experience with JESTEC, i wonder why you did not mention that your paper is accepted and will be published soon.

It is good to give negative feedback for improvement, we thank you but it is also fair to tell positive feedback, right?

Best regards

Executive Editor of JESTEC

**E Emmanuel** 5 years ago

@ Elena:I humbly suggest that the web link of all journals should be published alongside their name.This will eliminate the faking of journals in your data base.

reply

**W Wajde Alyhya** 5 years ago

Dear All

Could you please tell me how long it takes to be accepted and published online.

Thanks

reply

**D Dr. mohammed alwazzan** 4 years ago

3 to 4 month



**Elena Corera** 5 years ago

SCImago Team

Dear Wadje, in the link below you will find the information corresponding to the author's instructions of this journal. Best regards, SCImago Team

<http://jestec.taylors.edu.my/instructions.html>

#### Leave a comment

Name

Email

(will not be published)



I'm not a robot  
reCAPTCHA  
Privacy - Terms


Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®

EST MODUS IN REBUS

Horatio (Satire 1,1,106)

[Cookie settings](#)

[Cookie policy](#)



## THE EFFECT OF SLOPE GRANULATOR ON THE CHARACTERISTIC OF ARTIFICIAL GEOPOLYMER AGGREGATE USED IN PAVEMENT

HILDA YULIANA A.<sup>1</sup>, I. DEWA MADE ALIT KARYAWAN<sup>1</sup>,  
SURYAWAN MURTIADI<sup>1</sup>, JANUARTI JAYA EKAPUTRI<sup>2</sup>,  
ERVINA AHYUDANARI<sup>2,\*</sup>

<sup>1</sup>Department of Civil Engineering, Faculty of Engineering, University of Mataram,  
83125 Mataram, Nusa Tenggara Barat-Indonesia

<sup>2</sup>Department of Civil Engineering, Faculty of Civil, Environmental and Geo Engineering,  
Institut Teknologi Sepuluh Nopember, 60111 Surabaya, East Java-Indonesia

\*Corresponding Author: [ervina@ce.its.ac.id](mailto:ervina@ce.its.ac.id)

### Abstract

Infrastructure development uses aggregate as the main material. However, aggregate stocks in nature are limited because of the increasing demand. On the other hand, there is an accumulation of fly ash as a result of coal combustion in the power plant. Fly ash geopolymer can be formed into aggregate by cold bounding method with granulator machine. It is expected to replace the role of natural aggregate as a pavement material. The artificial aggregate is made by mixing fly ash with alkali activator using a granulator machine. The variation slope of granulator is 45°, 50°, and 55°. Artificial aggregates follow the specifications of Indonesian pavement material. The artificial aggregates obtained are examined through one way-ANOVA to determine the effect of the slope to the aggregate characteristic. The results show that the values of aggregate durability, hardness, and bitumen adhesion meet the requirement. However, the absorption and specific gravity fail to meet the requirement. The ANOVA test showed that the slope of the granulator affects the aggregate characteristics, those are the absorption and specific gravity of artificial aggregates. Artificial aggregate at a slope of greater than 50° formed more rapidly.

Keywords: Alkali, Artificial aggregate, Fly ash, Geopolymer, Pavement, The slope of the granulator.



## **1. Introduction**

Aggregate is natural mineral granules functioning as fillers in the mixture of mortar, concrete and asphalt concrete. This aggregate occupies approximately 60%-75% by mix volume [1, 2]. Aggregate strongly affect the characteristics of concrete or asphalt concrete due to its gradation. Therefore, the aggregate selection is the fundamental aspect of preparing the mixture of asphalt pavement. As the infrastructure requires a large volume of aggregates, the availability of the natural aggregate also will decrease. On the other hand, the accumulation of coal waste [3] raised another problem. There is a need to manage the coal waste disposal [4].

Chugh and Behum [4] proposed to deal with coal waste disposal, waste management. They consider the variation on the waste generation rate, engineering properties that influence the requirement of water discharge and the period of waste placement. The excessive production of coal waste, drove the researcher to find the formula to reduce the number of coal waste. Some of them create bricks [5, 6] and artificial aggregate [7, 8]. The production of artificial aggregate that makes use of coal waste was not clearly published. This research aim is to share the results related to processing artificial aggregate production. The artificial aggregate introduced in this paper is to make used coal waste, i.e., fly ash. The fly ash will form new material after mixing with alkali. This new material called geopolymer.

Geopolymer is a material produced from the synthesis of polymeric aluminosilicate and alkali resulting in a tetrahedral bounding polymer of  $\text{SiO}_3$  and  $\text{AlO}_4$  [9]. Rattanasak and Chindapasirt [10] explained that the fly ash, which is rich with silica and alumina has the full potential to be used as one of the sources for polymer binder. Artificial aggregate utilizes fly ash as basis material in the manufacture. Fly ash-based aggregates are a necessity for current construction to reduce heavy load structures and reduce construction costs because of its lightweight [11]. The geopolymer characteristics of fly ash have been studied extensively in the last decade [12]. Many studies conducted to maximize the utilization of fly ash waste. To make of paste binder geopolymer with a variation of alkali solution ratio between 0.5-2.5 to obtain the high compressive strength [13, 14]. The geopolymer paste binder made of fly ash is used as filler with several variations on the alkaline ratio to obtain high compressive strength. It was made using an alkaline solution with a variation ratio of 1.5-2.5 [15]. Production of artificial aggregate based on fly ash geopolymer uses several methods such as palletisation with pellet disk, cold-bonded, sintering, autoclaving. The effectiveness of the method depends on the speed, the slope, and the duration of the tools [16-21]. Previous studied produces aggregates from fly ash using a disc (pan) pelletizer machine at an angle of  $36^\circ$  to  $50^\circ$ , the efficiency production was the higher and perfect shape of the pellet at an angle of  $36^\circ$  produce with sized between 9-11 mm [16, 17, 22]. Other studies by Gesoglu et al. [19] shown that the efficiency of pellets is more efficient on the pelletizer angle, the angle of pelletizer lower than  $35^\circ$  or greater than  $45^\circ$  can result in the fly ash aggregates could not be made a higher strength pellets. The production of artificial geopolymer aggregate with a sintering method with a  $36^\circ$  angle obtained aggregates with a maximum size of 20 mm with SSD and OD values 1.68 and 1.21, while the absorption value was 39.01% [18]. Others showed that an angle of  $55^\circ$  is maintained as per previous studies, which give better palletisation efficiency and good grading of pellets [23].

The artificial aggregate using geopolymer fly ash uses the granulation technique. Granulation is the process of creating large particles called granules of a powder having a binding power. According to Mashinchian et al. [24], the granulation process uses two methods: wet granulation and dry granulation. Several factors affect the process of granulation; one of those is the slope of the granulator pan. A good granulator slope rate will release the best granules, the extreme high erect levels will make the material difficult to granulate while the extreme slight of the granular slope will cause the granules to have a large size but granules resulted are not dense enough [25]. The pan/disc granulation proves to be an effective method to produce artificial aggregate easier than compared to drum or cone granulation [23]. The different types of granulation machine were used to make the granule such as disc or pan type, drum type, cone type, and mixer type. With disc (pan) type the size distribution is easier to control than drum type. With pan type for granulation, the small grains are formed initially and are subsequently increased in large particle size [21]. Based on the description above, it is necessary to conduct in-depth and specific research on the effect of slope granulator on the artificial geopolymer aggregate.

This research aimed at identifying the effect of slope granulator on the characteristic and the grain size of artificial aggregate. The aggregate characteristic test was performed by referring to the third revision of the general specification of Bina Marga 2010. Bina Marga is one of directorate general of Ministry of Public Works in Indonesia that specialises in road infrastructure.

## 2. Experimental Program

Fly ash used in this study was coal-burning residue from Suralaya 1 - 4 steam power plant, Pulo Merak district, Cilegon city, Banten, Indonesia. Testing chemical element content in fly ash was carried out at Energy Laboratory, Institut Teknologi Sepuluh Nopember Surabaya. Fly ash Suralaya is classified as fly ash class F according to ASTM C-36. This is indicated by the amount of  $\text{Al}_2\text{SiO}_3$ ,  $\text{SiO}_3$  and  $\text{Fe}_2\text{O}_3$  content of 81.5% greater than 70% [26, 27]. The alkaline solution is made of aqueous NaOH and  $\text{Na}_2\text{SiO}_3$  liquid [15, 28]. The aquadus NaOH was prepared with eight molar molarity, NaOH flakes with 98% purity and aqueous and waited for 24 hours [15, 27, 29]. Meanwhile,  $\text{Na}_2\text{SiO}_3$  acts as a binder used in the form of a viscous liquid, which is ready to use [30].

In this study by Hardjito et al. [13], Ekaputri and Damayanti [14], Karyawan et al. [15], Memon et al. [27], Aravindan et al. [28] and Dutta et al. [29], the mass of fly ash/alkali activator is 25:75%, while the ratio of  $\text{Na}_2\text{SiO}_3/\text{NaOH}$  is 2.5:1 and they keep constant. Artificial geopolymer aggregate is made by using a granulator machine consisting of a granulator pan driven at a rotational speed of 26 rpm, a pan diameter of 120 cm and weight of about 20-50 kg with variations of the slope are 45°, 50°, and 55°. The artificial geopolymer aggregate was made then tested according to the aggregate testing procedure on SNI and analysed in accordance with the specifications of pavement material on the third revision of general specification of Bina Marga 2010 as shown in Table 1 and used the One Way ANOVA to know the effect of slope granulator on the grain size and the characteristic of artificial geopolymer aggregate, with the initial hypothesis that slope has an effect on the size and characteristics of artificial geopolymer aggregate.

The specification adopted is Bina Marga, an Indonesian Public Work authority, since the characteristics of each coal waste will be different following the geographical position of the coal mining, and the process of the coal waste [31].

Artificial geopolymer aggregate testing requires artificial aggregate material. Artificial geopolymer aggregate must meet the aggregate requirement for each artificial geopolymer aggregate characteristic test, the amount of artificial geopolymer aggregate requirements is shown in Table 2.

Table 2 shows the total aggregate requirements artificial geopolymer aggregate for each test. Each test requires 2 samples, thereby, the total aggregate requirements artificial aggregate is 53.400 gram.

**Table 1. Parameter of aggregate as a materials pavement based on third revision of general specification of Bina Marga 2010.**

Test	Standard	Value [32]
<b>Water absorption</b>	SNI 1969:2008 [33]	Max 3 %
<b>Durability</b>	Natrium sulfate (Na <sub>2</sub> SO <sub>4</sub> ) Magnesium sulfate (MgSO <sub>4</sub> )	Max 12% Max 18%
<b>Hardness</b>	AC modification	100 rounds
	mixture	500 rounds
	Asphalt mixture	100 rounds
	in other graded	500 rounds
<b>Adhesion</b>	SNI 2417:2008 [35]	Max 6% Max 30% Max 8% Max 40%
	SNI 2439:2011 [36]	Min 95%

**Table 2. Summary of artificial geopolymer aggregate needs.**

Sieve number	Type of test			
	Durability (grams) [34]	Hardness (grams) [35]	Adhesion (grams) [36]	Specific gravity and absorption (grams) [33]
1" (25 mm)	-	-	-	-
3/4"(19.1 mm)	-	2500	-	-
1/2"(12.5 mm)	670	2500	-	-
3/8"(9.5 mm)	330	-	-	2500
No. 4 (4.75 m)	300	-	100	-
<b>Required weight (grams)</b>	1300	5000	100	2500
<b>Required for one variation of slope</b>	= 8.900 grams			
<b>Slope variation</b>	= 3 (45°, 50°, 55°)			
<b>A sample for each test</b>	= 2 sample			
<b>Total of required weights</b>	<b>= 53.400 grams</b>			

### 3. Manufacturing Process of Artificial Geopolymer Aggregate

In the manufacturing process defined in four stages with variation angle of slope as shown in Figs. 1 and 2. The first step is to put in fly ash into a pan in the idle condition in stage 1 of Fig. 1(a). Turn on the granulator machine driven at a constant rotating speed of 26 rpm and spray the alkaline solution to fly ash.

Fly ash will react with alkaline solutions and begin to granulate after 2-3 minutes of spraying as seen in stage 2 in Figs. 1(c) and (d). Turn off the granulator machine when the aggregate has started out from granulator pan as the last stage in

Fig. 1(d). Repeat the steps in Figs. 1(a) to (d) in each variation of slope granulator. The aggregate that has made-up is rolled over the fly ash. Within one granulation process, the aggregate produced different grain size depending on the slope of granulator [16, 17, 37-40].

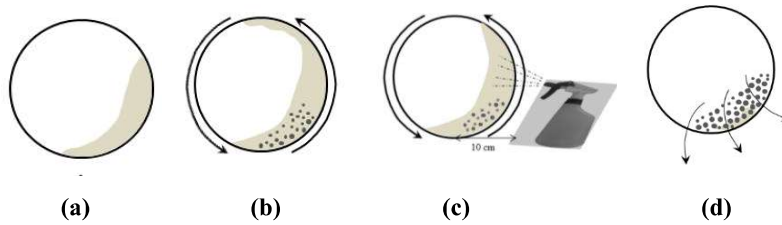


Fig. 1. Manufacturing process of artificial geopolymer aggregates.

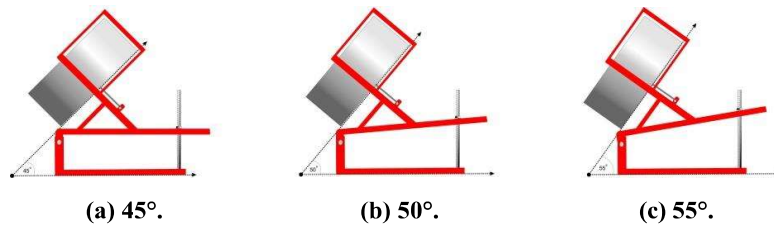


Fig. 2. Variation of slope granulator.

### 3.1. Testing and analysis

Geopolymer aggregate testing would be performed after 28 days of treatment at a normal temperature [41-43]. Aggregate characteristic testing includes specific gravity, absorption, abrasion, durability, and bitumen adhesion of aggregate. Test of specific gravity and aggregate absorption is intended to determine the artificial geopolymer aggregate weight and its ability to absorb the water [33]. Test of the durability aggregate aims to determine the durability of aggregate by the sodium sulfate solution [34]. Test of the hardness aggregate aims to determine the hardness of aggregate resistance with the Los Angeles machine [35]. While the test of bitumen adhesion aims to determine the percentage of aggregate surface area covered by asphalt to the aggregate surface [36].

One way ANOVA is a process of analysing data obtained from the experiment with various levels of a factor, usually more than two levels of the factor. The purpose of this analysis is to identify important independent variables and determine how they affect the response. The model for this statistical analysis is as follows [44].

$$y_{ij} = \mu + \tau_i + \epsilon_{ij} \quad \begin{cases} i=1,2,\dots,a \\ j=1,2,\dots,n \end{cases} \quad (1)$$

The null and alternative hypotheses for this statistical analysis are:

$$H_0: \mu_1 = \mu_2 = \dots = \mu_a \text{ or equivalently, } H_0: \tau_1 = \tau_2 = \dots = \tau_a = 0$$

$H_1: \mu_i \neq \mu_j$  for at least one pair  $(i,j)$

The  $H_0$  hypothesis should be rejected and conclude that there are differences in the treatment means if:

$$F > F_{\infty, a-1, n-a} \tag{2}$$

#### 4. Results and Discussion


##### 4.1. Aggregate gradation

The result of gradation test of the artificial geopolymer aggregate by each variation of the slope is shown in Fig. 3.

Figure 3 shows that the 50° slope presents a higher gap graded. The size of 9.5 mm and 12.5 mm indicates that the results have a larger range of variation compare to other sizes.

Based on the result of aggregate gradation, in different types of slope, in general, all types of slope released aggregate in size of 25 mm-2.36 mm. The manufacturing process of artificial geopolymer aggregate used 75% of fly ash and 25% of alkali solution. In practice, the alkaline solution has not completely used but fly ash was perfectly granulated, from the residual alkali obtained ratio value of fly ash/alkaline solution ranges between 0.30-0.32. As shown in Fig. 3, artificial geopolymer aggregate produced at different slope and rotated at the same speed produce aggregate with different weights on each aggregate size.

The difference in weight of each aggregate size is due to the duration in the aggregate manufacturing process, if the aggregate duration is ±15 minutes or more, then the aggregate that has granulated well on the size of 19.1 mm or 12.5 mm will crack and become a new granule, which is smaller but with the less good shape. Also, in the process, there is a fly ash material that sticks on the pan granulator and does not form the granules thus, reducing the amount of aggregate that is formed. In addition, it can be seen the slope of 50° does not produce aggregate with size 2.36 mm.

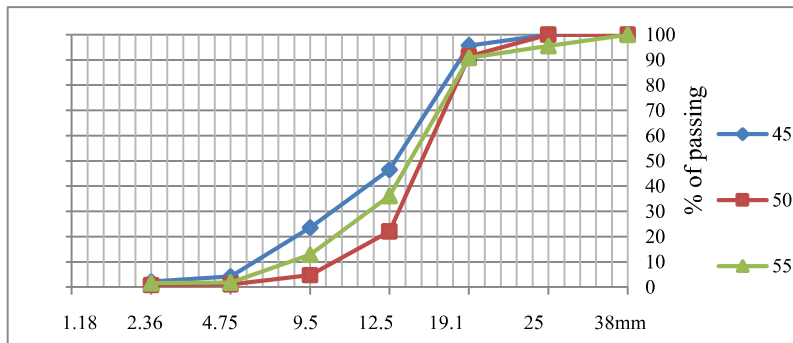

**Fig. 3. Artificial geopolymer aggregate gradation.**


The aggregate of this size is formed by certain treatments such as those formed from materials that have not granulated well during the aggregate production process from the aggregate pan in rolled over the fly ash. As a result, of the process

size aggregate size of 2.36 mm is formed, besides the special treatment that can be done to obtain aggregate with this size is to let fly ash that has not granulate well in the pan and rotated with the same speed while sprinkling the new fly ash so that granule formed the size of 2.36 mm. This is can also be seen in the aggregate shape as shown in Fig. 4, which is the result of manufacturing the aggregates in one time granulation process at each slope. The aggregates produced in a round shape almost resemble natural aggregates, the rounded shape of artificial geopolymer aggregate gives better workability compared to the natural aggregate [45]. In addition, aggregate at a slope of 45° and 55° have more ash particles with moisture film than the aggregate at a slope of 50°. Ash particles with moisture film unfinished react with the alkali solution, it cause aggregates not to form and only moisturize fly ash into small lumps that are not good, not dense and do not resemble aggregates.

As shown in Table 3, the value of calculated  $F = 5.79$ . The value of  $F$  critical ( $F_{0.05, 2, 15}$ ) by using the significant level of 95% ( $\alpha = 0.05$ ), with the degree of freedom is  $2(a-1)$  and the degree of freedom error is 15 ( $N-a$ ) then from the table  $F$ -distribution it can be found that  $F_{(0.05, 2, 15)} = 3.11$ . Because the value of  $F = 5.79 > 3.11$ ,  $H_0$  will be rejected, which mean the level is different. It indicates that the slope of granulator has a significant effect on the size of the artificial geopolymer aggregate.

**Table 3. Result of one way ANOVA on the gradation data.**

Source variation	Sum of squares	Degree of freedom	Mean squares	$F_0$	$F_{critical}$
Between treatments	2114515	5	422903.1	5.79	3.11
Within treatments	876614.7	12	73051.22		
Total	2991130	17			

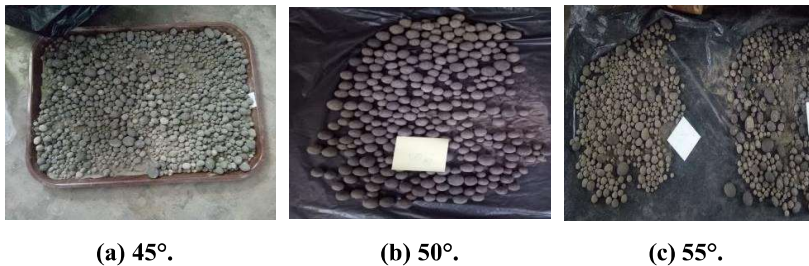

**Fig. 4. Artificial geopolymer aggregates.**

#### 4.2. Characteristic of artificial geopolymer aggregate

The result of the test of the characteristics of artificial geopolymer aggregate by each variation of a complete slope angle is shown in Table 4.

Statistical analysis of one-way anova on characteristic of artificial geopolymer aggregate shows that the value of the calculated  $F$  on the specific gravity and aggregate absorption is greater than the  $F$  critical ( $F_{0.05, 2, 3}$ ). Meanwhile, the value of the calculated  $F$  on the other test is less than the  $F$  critical. Based on this, it can be claimed that the slope of granulator has a significant effect on the values of

specific gravity and aggregate absorption, but it does not affect the values of aggregate hardness, durability, and bitumen adhesion.


**Table 4. Resume of value of aggregate characteristic.**

No.	Test	45°	50°	55°	Specification of	
					Bina Marga 2010	ASTM
1	Specific gravity	1.87	1.85	1.81	> 2.50	> 2.50
2	Absorption (%)	6.80	6.08	10.24	Max 3	Max 2
3	Durability (%)	6.13	5.22	3.27	Max 12	Max 12
4	Hardness (%)	23.27	22.78	24.35	Max 40	Max 50
5	Bitumen adhesion (%)	95.50	97.00	97.50	Min 95	-

Referring to the result of the test of the characteristics of aggregate from Table 5 and Fig. 5, indicated that the specific gravity and aggregate absorption of all variations of aggregate slope do not fulfill the requirements of the third revision of General Specification of Bina Marga 2010. However, the slope of 50° can be regarded as the preferred slope in producing the aggregate because it has the best shape and surface. Additionally, this slope gives the lowest absorption value compared to the other slope.


**Table 5. Result of one way ANOVA on aggregate characteristic.**

Source variation	Sum of squares	Degree of freedom	Mean squares	$F_0$	$F_{critical}$
<b>Specific gravity</b>					
Between treatments	0.0046	2	0.0023	17.29	9.55
Within treatments	0.0004	3	0.000133		
Total	0.005	5			
<b>Absorption</b>					
Between treatments	19.77	2	9.88	33.94	9.55
Within treatments	0.87	3	0.29		
Total	20.64	5			
<b>Durability</b>					
Between treatments	8.56	2	4.28	0.87	9.55
Within treatments	14.69	3	4.89		
Total	23.25	5			
<b>Hardness</b>					
Between treatments	2.58	2	1.29	0.54	9.55
Within treatments	7.08	3	2.36		
Total	9.66	5			
<b>Bitumen adhesion</b>					
Between treatments	4.33	2	2.17	0.92	9.55
Within treatments	7	3	2.33		
Total	11.33	5			

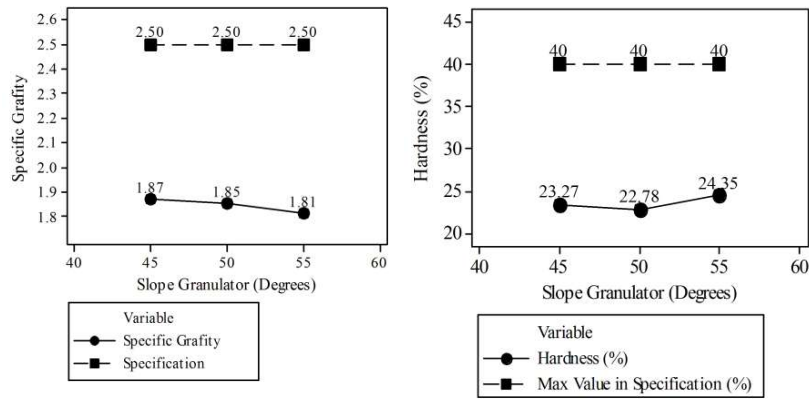


(a) Value of specific gravity.

(b) Value of hardness.

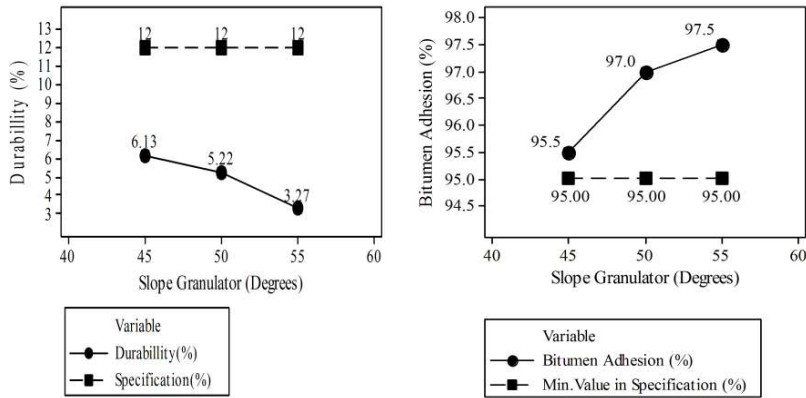

(c) Value of durability.

(d) Value of bitumen adhesion.

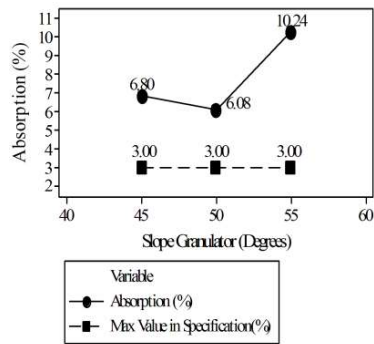

(e) Value of absorption.

Fig. 5. Result of test of characteristics of artificial geopolymer aggregate.



The other aggregate characteristic values that have fulfilled a third of specification of Bina Marga 2010 also result from this slope. The low value of specific gravity and the amount of absorption is caused by several factors such as the number of pores in artificial geopolymer aggregate; according to the statement that flies ash based geopolymer material is very porous [28].

The granulator with an angle more than 50° will produce the aggregate with more pores but the producing process easier. The angle under 50° also produced aggregate with pore but the process of producing more difficult. Consequently, it is necessary to change the mix design such as changes in ratio value or concentration of NaOH solution to obtain specific gravity and absorption according to the specification.

Table 6 shows a comparison of the characteristics of aggregates with different slope variations. Previous research shows low specific gravity values, greater absorption and hardness values. The process of manufacturing artificial geopolymer aggregate is best obtained at a slope of 50°, NaOH and Na<sub>2</sub>SiO<sub>3</sub> as an alkali activator with a ratio of 2.5. This can be seen from the aggregates characteristic values that are relatively better than artificial aggregates with other slopes.

**Table 6. Comparison of characteristic values of artificial aggregates with previous research.**


Test	45°	50°	55°	36° [16]	45° [37]	45° [38]	35° [39]
Specific gravity	1.87	1.85	1.81	1.89	1.69	2.14	1.55
Absorption (%)	6.80	6.08	10.24	21.26	12.9	10.30	29.4
Durability (%)	6.13	5.22	3.27	-	-	1.42	-
Hardness (%)	23.27	22.78	24.35	50.47	30.7	34.00	-
Bitumen adhesion (%)	95.50	97.00	97.50	-	-	15	-
Shape	Round	Round	Round	Round	Round	Round	Round

### 4.3. Scanning electron microscope (SEM)

An artificial aggregate is derived from fly ash based on geopolymer paste [15]. This research shows that slope affects the grain size and aggregate characteristic values, especially the value of specific gravity and absorption. The values of specific gravity and aggregate absorption do not fulfil the characteristic as a pavement material. This suggests that artificial geopolymer aggregate have more pores. It can be seen in Fig. 6, the result SEM as follows.

The microscopic structure of the fly ash aggregates revealed in low and high magnification by Scanning Electron Microscopy (SEM). It can be seen in Fig. 6 that all the above SEM Images of Fly ash aggregates and arrangement of fly ash particles are occupied very compact and homogeneous [46]. The crystalline structure of fly ash remains and resulting in pores on artificial geopolymer aggregates. Based on the statement that the presence of pores in the aggregate filled with particles crystals of fly ash, which absorbs more water and also the pores in the inner and outer core of the aggregates resulting in more absorption [46]. On the process of manufacturing artificial geopolymer aggregate fly ash is moisturized forms a liquid on the surface of the grains, which forms the granule, then they formed ball shapes structure with increased bonding force between the grains due to centrifugal and gravitational forces based on the slope granulator. In the process

of granulation the fly ash that has not granulate or not reacted with alkali, which then granulates with ball shape that has been perfect, so that, the pores formed. This process produces aggregate with a relatively large size but has more pores.

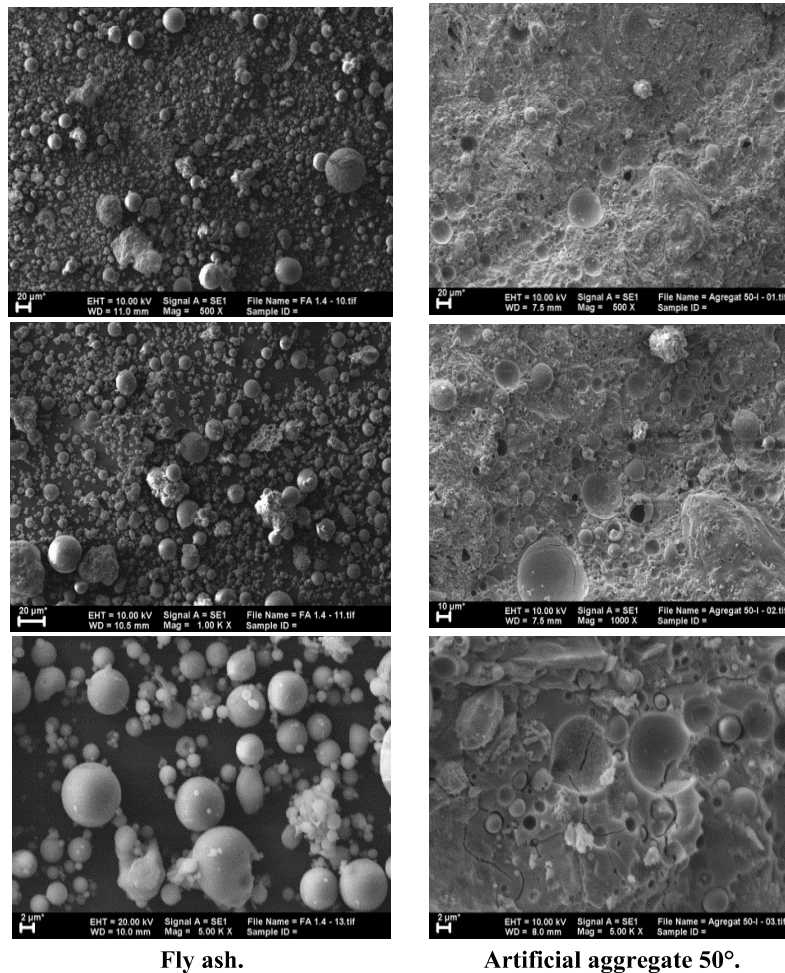

**Fig. 6. Resulting tests SEM the fly ash and artificial geopolymer aggregate.**

Other characteristics of artificial geopolymer aggregate such as aggregate hardness with low angles to find out compressive strength. The aggregate hardness value was determined to confirm whether it is less than 30% and 45% and the low value of specific gravity compare to natural aggregate proves it to be used in road construction and building construction as a lightweight aggregate on the concrete mix [16, 47]. The use of aggregates in concrete presents a positive aspect, some benefits including the concrete density achieved by artificial geopolymer aggregate, which allows reducing the dead load structure, column dimensions, slabs, and beams.

Overall, artificial geopolymer aggregate has not fulfilled the third revision of the General Specification of Bina Marga 2010 namely the values of specific gravity and aggregate absorption. However, by principles of pavement engineering, there is six tasks that pavement has to fulfill, namely, protect the subgrade, guard against deformation in the pavement layers, guard against the break-up of the pavement layers, protect from environmental attack, provide a suitable surface, and ensure maintainability. When follows the six principles of pavement engineering. Therefore, artificial geopolymer aggregate can replace the role of natural aggregate as an aggregate on pavement material.

#### **4. Conclusions**

The production of artificial geopolymer aggregate has been done so that the geopolymer aggregate obtained, which is then tested for the characteristics of artificial geopolymer aggregate and statistical analysis using one-way anova. some conclusions obtained from the research are given below.

- Artificial aggregate results from each slope of 45°, 50°, and 55° have relatively small aggregate size differences. In general, the artificial geopolymer aggregate released is the aggregate in size 3/4 inch (19.1 mm) - No. 8 (2.36 mm), but at an angle of 55°, there is the relatively large amount of 1 inch (25 mm) aggregate.
- From the result of the aggregate characteristic test, the highest specific gravity value at a slope of 45° is 1.87 while the best absorption at a slope of 50° is 6.08%. However, the value of specific gravity and water absorption of each slope has not fulfilled the third revision of the general specification of Bina Marga as road pavement material because the value of the specific gravity is still below 2.5 and aggregate absorption is still above 3%, it indicates that the artificial geopolymer aggregate has a relatively large pore. The low value of specific gravity and the high absorption value of aggregate with natural aggregates to be lightweight aggregates, which causes artificial geopolymer aggregate has been consumed in a large volume of asphalt when it is used as a pavement material.
- The best aggregate hardness value obtained at a slope of 50° with a value of 22.78%, while at a slope of 45° it is equal to 23.27% and 55° with a value of 24.35%.
- The best value of durability aggregate obtained on the slope 55° with a value of 3.27% and the highest is at a slope of 45° is 6.13%.
- The best value of bitumen adhesion aggregate obtained on the slope 55° is 97.50%, and the lowest is at a slope of 45° is 95.50%.
- The best slope in the process of manufacturing artificial geopolymer aggregate with a slope of 50°. In this slope, artificial geopolymer aggregate has the best hardness value with low absorption values and relatively small specific gravity. Moreover, the other aggregate characteristic values have fulfilled a third of specification of Bina Marga 2010. Artificial geopolymer aggregate can be used as a lightweight aggregates replacement for natural aggregates as road pavement material and can also be applied as a concrete mixture.

## Acknowledgement

This research is sponsored by Research Scheme EPI UNET Program-Eastern Part Indonesian University Network Year 2017. This research grant scheme is coordinated by Institut Teknologi Sepuluh Nopember.

### Nomenclatures

$F$	Response of the $i^{\text{th}}$ observation
$H_1$	Hypothesis not ok
$H_0$	Hypothesis ok
$Y_{ij}$	Response of $i^{\text{th}}$ observation

### Greek Symbols

$\epsilon_{ij}$	Random error component
$\mu$	Overall mean
$\tau_i$	$i^{\text{th}}$ treatments effect

### Abbreviations

SNI	Standard Nasional Indonesia
ASTM	American Standard Testing and Materials
ANOVA	Analysis One Variance

## References

1. Cachim, P.B. (2009). Mechanical properties of brick aggregate concrete. *Construction and Building Material*, 23(3), 1292-1297.
2. Nadesan, M.S.; and Dinakar, P. (2017). Mix design and properties of fly ash waste lightweight aggregates in structural lightweight concrete. *Case Studies in Construction Materials*, 7, 336-347.
3. Lievanos, R.S.; Greenberg, P.; and Wishart, R. (2018). In the shadow of production: Coal waste accumulation and environmental inequality formation in Eastern Kentucky. *Social Science Research*, 71, 37-55.
4. Chugh, Y.P.; and Behum, P.T. (2014). Coal waste management practices in the USA: An overview. *International Journal Coal Science and Technology*, 1(2), 163-176.
5. Taha, Y.; Benzaazoua, M.; Hakkou, R.; and Mansori, M. (2017). Coal mine wastes recycling for coal recovery and eco-friendly bricks production. *Minerals Engineering*, 107, 123-138.
6. Stolboushkin, A.Y.; Ivanov, A.I.; and Fomina, O.A. (2016). Use of coal-mining and processing wastes in production of bricks and fuel for their burning. *Procedia Engineering*, 150, 1496-1502.
7. Sijo. (2018). Types of aggregates - Natural and artificial aggregates. Retrieved October 10, 2018, from <https://readcivil.com/types-of-aggregates/>.
8. Singh, G.B. (2016). Artificial aggregate production from fly ash. Retrieved October 10, 2018, from <https://www.masterbuilder.co.in/data/edata/Articles/April2016/52.pdf>.

9. Davidovits, J. (1994). Properties of geopolymer cements. *Proceedings of the First International Conference on Alkaline Cements and Concretes*. Kiev, Ukraine, 131-149.
10. Rattanasak, U.; and Chindaprasirt, P. (2009). Influence of NaOH solution on the synthesis of fly ash geopolymer. *Minerals Engineering*, 22(12), 1073-1078.
11. Lijiu, W.; Shuzhong, Z.; and Guofan, Z. (2005). Investigation of the mix ratio design of lightweight aggregate concrete. *Cement and Concrete Research*, 35(5), 931-935.
12. Pu, S.; Duan, P.; Yan, C.; and Ren, D. (2016). Influence of sepiolite addition on mechanical strength and microstructure of fly ash-metakaolin geopolymer paste. *Advanced Powder Technology*, 27(6), 2470-2477.
13. Hardjito, D.; Cheak, C.C.; and Ing, C.H.I. (2008). Strength and setting times of low calcium fly ash-based geopolymer mortar. *Modern Applied Science*, 2(4), 3-11.
14. Ekaputri, J.J.; and Damayanti, O. (2007). Sifat mekanik beton geopolimer berbahan dasar fly ash jawa power paiton sebagai material alternatif. *Jurnal Pondasi*, 13(2), 124-134.
15. Karyawan, I.D.M.A.; Ahyudanari, E. and Ekaputri, J.J. (2017). Potential use of fly ash base-geopolymers aggregate substitution in asphalt concrete mixtures. *International Journal of Engineering and Technology*, 9(5), 3744-3752.
16. Gomathi, P.; and Sivakumar, A. (2014). Synthesis of geopolymer based class-F fly ash aggregates and its composite properties in concrete. *Archives of Civil Engineering*, 60(1), 55-75.
17. Gomathi, P.; and Sivakumar, A. (2013). Crushing strength properties of furnace slag-fly ash blended lightweight aggregates. *ARPJ Journal Engineering and Applied Sciences*, 8(4), 246-251.
18. Gomathi, P.; and Sivakumar, A. (2012). Characterization on the strength properties of pelletized fly ash aggregate. *ARPJ Journal Engineering and Applied Sciences*, 7(11), 1523-1532.
19. Gesoglu, M.; Guneyisi, E.; and Oz, H.O. (2012). Properties of lightweight aggregates produced with cold-bonding pelletization of fly ash and ground granulated blast furnace slag. *Material and Structures*, 45(10), 1535-1546.
20. Geetha, S.; and Ramamurthy, K. (2011). Properties of sintered low calcium bottom ash aggregate with clay binders. *Construction and Building Materials*, 25(4), 2002-2013.
21. Harikrishnan, K.I.; and Ramamurthy, K. (2006). Influence of pelletization process on the properties of fly ash aggregates. *Waste Management*, 26(8), 846-852.
22. Gomathi, P.; and Sivakumar, A. (2014). Performance evaluation of alkali activated fly ash lightweight aggregates. *Engineering Journal*, 18(1), 77-85.
23. Bijen, J.M.J.M. (1986). Manufacturing processes of artificial lightweight aggregates from fly ash. *International Journal Cement Composites and Lightweight Concrete*, 8(3), 191-199.
24. Mashinchian, O.; Johari-Ahar, M.; Ghaemi, B.; Rashidi, M.; Barar, J.; and Omid, Y. (2014). Impacts of quantum dots in molecular detection and bioimaging of cancer. *BioImpacts*, 4(3), 149-166.

25. Isroi. (2009). Pupuk organik granul sebuah petunjuk praktis. Retrieved May 5, 2018, from <https://isroi.com/2013/05/13/pupuk-organik-granul-sebuah-petunjuk-praktis/>.
26. ASTM International. (2019). Standard specification for coal fly ash and raw or calcined natural pozzolan for use in concrete. *ASTM C-618-19*.
27. Memon, F.A.; Nuruddin, M.F.; Khan, S.; Shafiq, N. and Ayub, T. (2013) Effect of sodium hydroxide concentration on fresh properties and compressive strength of self-compacting geopolymer concrete. *Journal of Engineering Science and Technology (JESTEC)*, 8(1), 44-56.
28. Aravindan, S.; Jagadish, N.; and Peter, G.A. (2015). Experimental investigation of alkali-activated slag and flyash based geopolymer concrete. *ARPN Journal of Engineering and Applied Sciences*, 10(10), 4701-4705.
29. Dutta, D.; Thokchom, S.; Ghosh, P.; and Ghosh, M. (2010). Effect of silica fume additions on porosity of fly ash geopolymers. *ARPN Journal of Engineering and Applied Science*, 5(10), 74-79.
30. Komnitsas, K.; and Zaharaki, D. (2007). Geopolymerisation: A review and prospects for the minerals industry. *Minerals Engineering*, 20(14), 1261-1277.
31. Nyashina, G.S.; Kurgankina, M.A.; and Strizhak, P.A. (2018). Environmental, economic and energetic benefits of using coal and oil processing waste instead of coal to produce the same amount of energy. *Energy Conversion and Management*, 174, 175-187.
32. Department Pekerjaan Umum. (2010). *Spesifikasi umum bina marga 2010 revisi 3*. Direktorat Jenderal Bina Marga, Republik Indonesia.
33. Badan Standardisasi Nasional. (2008). Cara uji berat jenis dan penyerapan air agregat kasar. Standar Nasional Indonesia. *SNI 1969:2008*.
34. Badan Standardisasi Nasional. (2008). Cara uji sifat kekekalan agregat dengan cara perendaman menggunakan larutan natrium sulfat atau magnesium sulfat. Standar Nasional Indonesia. *SNI 3407:2008*.
35. Badan Standardisasi Nasional. (2008). Cara uji keausan agregat dengan mesin abrasi Los Angeles. Standar Nasional Indonesia. *SNI 2417:2008*.
36. Badan Standardisasi Nasional. (2011). Metode uji penyelimutan dan pengelupasan pada campuran agregat-aspal. Standar Nasional Indonesia. *SNI 2439:2011*.
37. Shivaprasad, K.N.; and Das, B.B. (2018). Determination of optimized geopolymerization factors on the properties of pelletized fly ash aggregates. *Construction and Building Materials*, 163, 428-437.
38. Sudrajat. (2016). *Penilaian agregat buatan berbahan dasar fly ash untuk bahan perkerasan jalan di berbagai variasi suhu perawatan*. Master Thesis. Faculty of Civil Engineering and Planning. Surabaya, Jawa Timur, Indonesia: Institut Teknologi Sepuluh Nopember.
39. Samal, D.K. (2016). *An investigation of pelletisation of fly ash*. Master Dissertation. Department of Civil Engineering, Indian Institute of Technology Roorkee, Roorkee:India.
40. Sivakumar, A.; and Gomathi, P. (2012). Pelletized fly ash lightweight aggregate concrete: A promising material. *Journal of Civil Engineering and Construction Technology*, 3(2), 42-48.

41. Davidovits, J. (1999). *Geopolymer chemistry and applications* (4<sup>th</sup> ed.). Saint-Quentin, France: Institut Geopolymere.
42. Hardjito, D.; Wallah, S.E.; Sumajouw, D.M.J.; and Rangan, B.V. (2004). Factors influencing the compressive strength of fly ash-based geopolymer concrete. *Civil Engineering Dimension*, 6(2), 88-93.
43. Lazarescu, A.V.; Szilagyi, H.; Baera, C.; and Ioani, A. (2017). The effect of alkaline activator ratio on the compressive strength of fly ash-based geopolymer paste. *Proceedings of the International Conference on Innovative Research (ICIR EUROINVENT)*. Iasi, Romania, 6 pages.
44. Wackerly, D.D.; Mendenhall III, W.; and Scheaffer, R.L. (2008). *Mathematical statistics with applications* (7<sup>th</sup> ed.). Stamford, Connecticut, United States of America: Thomson Learning, Inc.
45. Priyadharshini, P.; Ganesh, M.G.; Santhi, A.S. (2011). Experimental study on cold bonded fly ash aggregates. *International Journal of Civil and Structural Engineering*, 2(2), 493-501.
46. Suresh, G.V.; and Karthikeyan, J. (2016). Influence of chemical curing technique on the properties of fly ash aggregates prepared without conventional binders. *Journal of Structural Engineering*, 43(4), 381-389.
47. Srinivasan, K.; Mutharasi, M.; Vaishnavi, R.; Mohan, S.; and Logeswaran, V. (2016). An experimental study on manufacture of artificial aggregates incorporating flyash, rice husk ash and iron ore dust. *International Journal Science, Engineering and Technology Research*, 5(1), 163-168.