



Road and Airfield Pavement Technology, pp 269–280

[Home](#) > [Road and Airfield Pavement Technology](#) > Conference paper

Texture and Skid Resistance of Asphalt Concrete Surface Course Incorporating Geopolymer Artificial Aggregates

[I Dewa Made Alit Karyawan](#) , [Iswandaru Widyatmoko](#),
[Januarti Jaya Ekaputri](#) & [Erвина Ahyudanari](#)

Conference paper | [First Online: 30 January 2022](#)

501 Accesses

Part of the [Lecture Notes in Civil Engineering](#) book series
(LNCE, volume 193)

Abstract

Skid resistance is required to prevent vehicle wheels from slipping on a road surface. The skid resistance is influenced by surface texture of the road, which is a function of aggregate properties and grading characteristics. This study aimed to examine the effect of using artificial aggregates on the texture depth and the skid resistance of two asphalt concrete surface course (ACSC) mixtures (dense and open

graded). The artificial aggregate, which was made from a mixture of a locally sourced fly ash geopolymer paste and an alkaline activator, was used to partially substituting the coarse aggregate in these ACSC mixtures. ACSC slab samples, without and with 25% artificial aggregate, were produced in laboratory. The texture depth and skid resistance characteristics were subsequently determined. This study found that the differences in texture depth and skid resistance of the two ACSC mixtures were contributed by the difference in gradation of the mixtures and the properties of the coarse aggregate in the mixtures. The ACSC mixture containing 100% natural coarse aggregate (crushed stone) has a deeper and rougher texture depth than those containing 25% rounded artificial aggregate. Post-wheel track loading, the texture depth and skid resistance of open graded ACSC were found to be higher than those of dense graded ACSC. These trends were consistent regardless the type of aggregates used in these ACSC samples. Overall, all tested samples showed skid resistance values meeting the requirements for heavily trafficked roads in urban areas where the traffic speed does not exceed 95 km/h.

Keywords

Artificial aggregate Asphalt concrete

Geopolymer Skid resistance Texture depth

This is a preview of subscription content, [access via your institution.](#)

▼ Chapter

EUR 29.95

Price includes VAT (Indonesia)

- DOI: 10.1007/978-3-030-87379-0_19
- Chapter length: 12 pages
- Instant PDF download
- Readable on all devices
- Own it forever
- Exclusive offer for individuals only
- Tax calculation will be finalised during checkout

Buy Chapter

▼ eBook

EUR 192.59

Price includes VAT (Indonesia)

- ISBN: 978-3-030-87379-0
- Instant EPUB and PDF download
- Readable on all devices
- Own it forever
- Exclusive offer for individuals only
- Tax calculation will be finalised during checkout

Buy eBook

▼ Softcover Book

EUR 229.99

Price excludes VAT (Indonesia)

- ISBN: 978-3-030-87381-3
- Dispatched in 3 to 5 business days
- Exclusive offer for individuals only
- Free shipping worldwide
[See shipping information.](#)
- Tax calculation will be finalised during checkout

Buy Softcover Book

▼ Hardcover Book

EUR 229.99

Price excludes VAT (Indonesia)

- ISBN: 978-3-030-87378-3
- Dispatched in 3 to 5 business days
- Exclusive offer for individuals only
- Free shipping worldwide
[See shipping information.](#)
- Tax calculation will be finalised during checkout

Buy Hardcover Book

[Learn about institutional subscriptions](#)

References

1. Bhadane KR, Naktode DPL (2020) A literature review: surface texture characteristics and frictional noise of the pavement. *Aegaeum J* 8(5):745–751
 2. Kienle R, Ressel W, Götz T, Weise M (2018) The influence of road surface texture on the skid resistance under wet conditions. February 6, 2018
 3. Li QJ, Zhan Y, Yang G, Wang KCP (2020) Pavement skid resistance as a function of pavement surface and aggregate texture properties. *Int J Pavement Eng* 21(10):1159–1169
-

4. Mataei B, Zakeri H, Zahedi M, Nejad FM (2016) Pavement friction and skid resistance measurement methods: a literature review. Open J Civ Eng 6:537–565

5. Wang GC (2016) Slag use in asphalt paving; the utilization of slag in civil infrastructure construction, 2016.
<https://www.sciencedirect.com/topics/engineering/skid-resistance>

6. Dunlap DF, Fancher PS, Scott RE, MacAdam CC, Segel L (1976) Transp Res Rec 584:15–21

7. Yager TJ (2013) Retired NASA research engineer consultant on tire/pavement friction issues. Presented at Tenth ALACPA Airport Pavement Seminar Mexico City, Mexico; 30 September–4 October 2013

8. Pasindu HR, Fwa TF, Ong GP (2012) Analysis of skid resistance variation on a runway during an aircraft landing operation. In: Seventh international conference on maintenance and rehabilitation of pavements and technological control, Auckland, January 2012. New Zealand

9. Sekartadji R, Karyawan IDMA (2021) Analysis of the causes and prevention of runway excursions. In: ICST conference, December 14th 2020, Proceeding ICST (2021) vol 2, June 2021. e-ISSN: 2722-7375
-
10. Sengoz B, Onson A, Topal A (2014) Effect of aggregate shape on the surface properties of flexible pavement; properties of flexible pavement. KSCE J Civ Eng 18(5):1–8
-
11. Karyawan IDMA, Ekaputri JJ, Widyatmoko I, Ahyudanari E (2019) The effects of $\text{Na}_2\text{SiO}_3/\text{NaOH}$ ratios on the volumetric properties of fly ash geopolymer artificial aggregates. Mater Sci Forum 967:228–235
-
12. Yuliana HA, Karyawan IDMA, Murtiadi S, Ekaputri JJ, Ahyudanari E (2019) The Effect of slope granulator on the characteristic of artificial geopolymer aggregate. J Eng Sci Technol 14(3):1466–1481
-
13. Karyawan IDMA, Ekaputri JJ, Widyatmoko I, Ahyudanari E (2020) The effect of various $\text{Na}_2\text{SiO}_3/\text{NaOH}$ ratios on the physical properties and microstructure of artificial aggregates. J Eng Sci Technol 15(2):1139–1154

-
14. Spesifikasi Umum Bina Marga Konstruksi Jalan dan Jembatan. Ditjen Bina Marga. Kementerian PUPR. 2018
-
15. Yaacob H, Bituminous pavement surface texture and skid resistance testing: the investigation of surface roughness of bituminous pavements
-
16. ASTM E965-06 (2006) Standard test method for measuring pavement macro texture depth using a volumetric technique. ASTM
-
17. BS EN 13036-4 (2011) Road and airfield surface characteristics—test methods part 4: method for measurement of slip/skid resistance of a surface: the pendulum test. BSI
-
18. Road Note 27 (1969) Instructions for using the portable skid-resistance tester. Road Research Laboratory. HMSO London
-

Author information

Authors and Affiliations

Civil Engineering Department, University of Mataram, Mataram, 83125, Indonesia

I Dewa Made Alit Karyawan

**Transportation and Infrastructure Materials
Research, AECOM, Nottingham, NG9 6RZ, UK**

Iswandaru Widyatmoko

**Civil Engineering Department, Universitas
Pertamina, Jakarta, 12220, Indonesia**

Iswandaru Widyatmoko

**Civil Engineering Department, Institut Teknologi
Sepuluh Nopember, Surabaya, 60111, Indonesia**

Januarti Jaya Ekaputri & Ervina Ahyudanari

Corresponding author

Correspondence to [I Dewa Made Alit Karyawan](#).

Editor information

Editors and Affiliations

**Department of Civil Engineering, University of
Moratuwa, Moratuwa, Sri Lanka**

Dr. H. R. Pasindu

**Department of Civil Engineering, University of
Moratuwa, Moratuwa, Sri Lanka**

Dr. Saman Bandara

**Department of Civil Engineering, University of
Moratuwa, Moratuwa, Sri Lanka**

Dr. W. K. Mampearachchi

**Department of Civil and Environmental
Engineering, National University of Singapore,
Singapore, Singapore**

Dr. T. F. Fwa

Rights and permissions

[Reprints and Permissions](#)

Copyright information

© 2022 The Author(s), under exclusive license to Springer Nature Switzerland AG

About this paper

Cite this paper

Karyawan, I.D.M.A., Widyatmoko, I., Ekaputri, J.J., Ahyudanari, E. (2022). Texture and Skid Resistance of Asphalt Concrete Surface Course Incorporating Geopolymer Artificial Aggregates. In: Pasindu, H.R., Bandara, S., Mampearachchi, W.K., Fwa, T.F. (eds) Road and Airfield Pavement Technology. Lecture Notes in Civil Engineering, vol 193. Springer, Cham. https://doi.org/10.1007/978-3-030-87379-0_19

[.RIS](#) [.ENW](#) [.BIB](#)

DOI

https://doi.org/10.1007/978-3-030-87379-0_19

Published	Publisher Name	Print ISBN
30 January 2022	Springer, Cham	978-3-030-87378-3

Online ISBN	eBook Packages
978-3-030-87379-0	Engineering Engineering (RO)

Not logged in - 103.190.47.83

Not affiliated

SPRINGER NATURE

© 2023 Springer Nature Switzerland AG. Part of [Springer Nature](#).



Source details

Lecture Notes in Civil Engineering

Scopus coverage years: 1975, from 2016 to Present

Publisher: Springer Nature

ISSN: 2366-2557 E-ISSN: 2366-2565

Subject area: Engineering: Civil and Structural Engineering

Source type: Book Series

CiteScore 2021

0.5



SJR 2021

0.133



SNIP 2021

0.176



[View all documents >](#)

[Set document alert](#)

[Save to source list](#) [Source Homepage](#)

[CiteScore](#) [CiteScore rank & trend](#) [Scopus content coverage](#)

i Improved CiteScore methodology



CiteScore 2021 counts the citations received in 2018-2021 to articles, reviews, conference papers, book chapters and data papers published in 2018-2021, and divides this by the number of publications published in 2018-2021. [Learn more >](#)

CiteScore 2021

$$0.5 = \frac{4,260 \text{ Citations 2018 - 2021}}{8,469 \text{ Documents 2018 - 2021}}$$

Calculated on 05 May, 2022

CiteScoreTracker 2022

$$0.7 = \frac{8,226 \text{ Citations to date}}{12,263 \text{ Documents to date}}$$

Last updated on 05 April, 2023 • Updated monthly

CiteScore rank 2021

Category	Rank	Percentile
Engineering		
Civil and Structural Engineering	#296/326	9th

[View CiteScore methodology >](#) [CiteScore FAQ >](#) [Add CiteScore to your site](#)

About Scopus

[What is Scopus](#)

[Content coverage](#)

[Scopus blog](#)

[Scopus API](#)

[Privacy matters](#)

Language

[日本語版を表示する](#)

[查看简体中文版本](#)

[查看繁體中文版本](#)

[Просмотр версии на русском языке](#)

Customer Service

[Help](#)

[Tutorials](#)

[Contact us](#)

ELSEVIER

[Terms and conditions](#) ↗ [Privacy policy](#) ↗

Copyright © Elsevier B.V. ↗. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the use of cookies ↗.





Submit Your VMI Jrnl Article

Veterinary Medicine International Invites Papers on All Areas of Vete Research.

Hindawi

Lecture Notes in Civil Engineering

COUNTRY

Switzerland



Universities and research institutions in Switzerland



Media Ranking in Switzerland

SUBJECT AREA AND CATEGORY

Engineering
Civil and
Structural
Engineering

PUBLISHER

Springer Singapore

H-INDEX

18

PUBLICATION TYPE

Book Series

ISSN

23662565, 23662557

COVERAGE

1975, 2016-2023

INFORMATION

[Homepage](#)

[How to publish in this journal](#)

giovanni.solari@unige.it



Perusahaan Terkenal Glo

Fokus dengan Klien, Akses Platform di Setiap Perangkat & Akun Manajer Pribadi

✕ ⓘ

SCOPE

Lecture Notes in Civil Engineering (LNCE) publishes the latest developments in Civil Engineering - quickly, informally and in top quality. Though original research reported in proceedings and post-proceedings represents the core of LNCE, edited volumes of exceptionally high quality and interest may also be considered for publication. Volumes published in LNCE embrace all aspects and subfields of, as well as new challenges in, Civil Engineering.

🗨️ Join the conversation about this journal

Submit paper for publication

How to Publish Paper, free cost publication, ugc care journal policy follow

IJNRD Research Journal

Open

↕️ Quartiles




Submit paper for publication

How to Publish Paper, free cost publication, ugc care journal policy follow


IJNRD Research Journal

Open


SJR

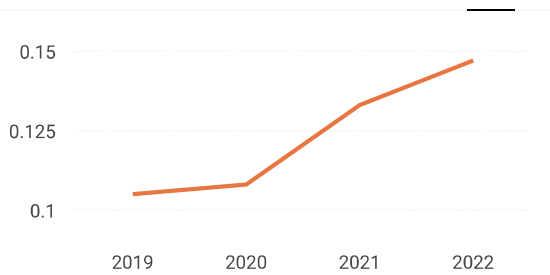


Total Documents

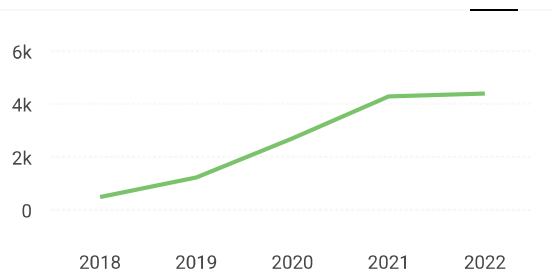


Total Cites Self-Cites

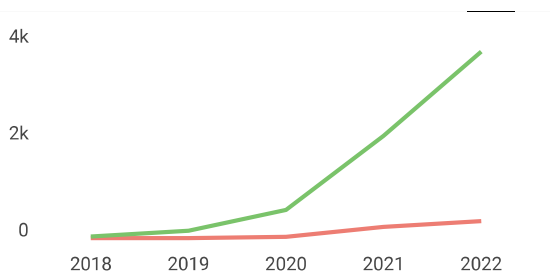


Citations per document

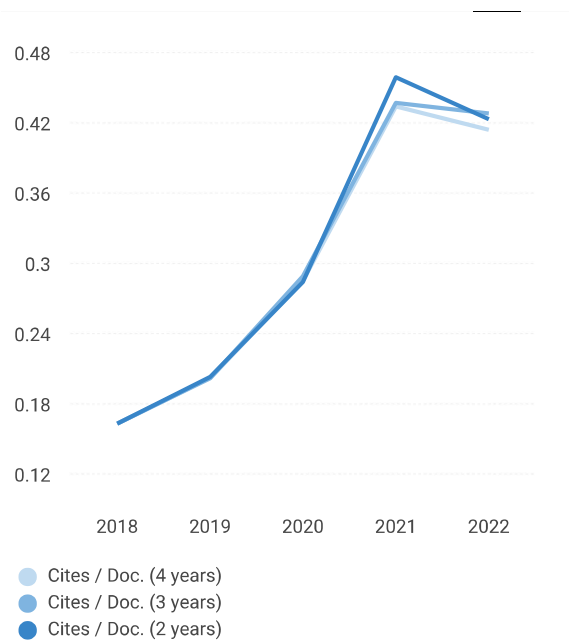


External Cites per Doc Cites per Doc

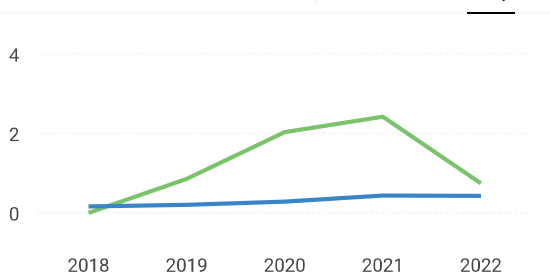


% International Collaboration

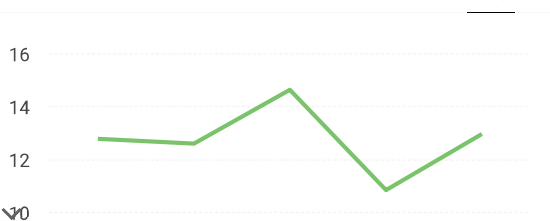

Citable documents Non-citable documents

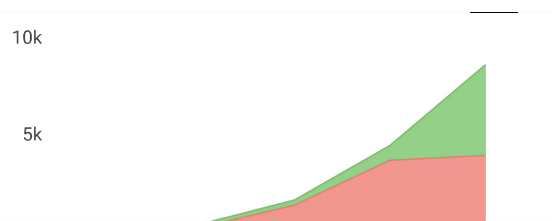

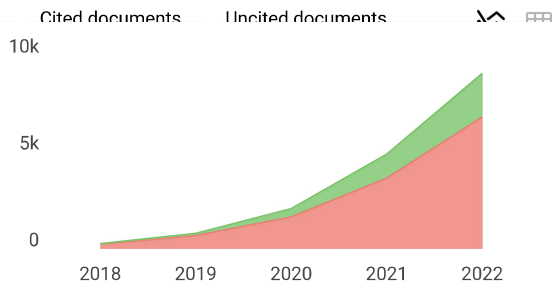


← Show this widget in your own website

Just copy the code below and paste within your html code:

```
<a href="https://www.scimag
```

SCImago Graphica

Explore, visually communicate and make sense of data with our [new data visualization tool](#).

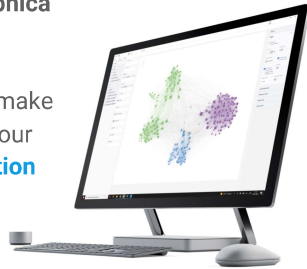

Metrics based on Scopus® data as of April 2023

B MAHENDRA 1 year ago

im an post graduate student in structural engineering, how much time it will take for acceptance and publishing the journal

reply



Melanie Ortiz 1 year ago

Dear Mahendra,

SCImago Team



they could inform you more deeply.
Best Regards, SCImago Team

Leave a comment

Name

Email

(will not be published)

I'm not a robot reCAPTCHA
Privacy - Terms


Submit

The users of Scimago Journal & Country Rank have the possibility to dialogue through comments linked to a specific journal. The purpose is to have a forum in which general doubts about the processes of publication in the journal, experiences and other issues derived from the publication of papers are resolved. For topics on particular articles, maintain the dialogue through the usual channels with your editor.

Developed by:



Powered by:



Follow us on @ScimagoJR

Scimago Lab, Copyright 2007-2022. Data Source: Scopus®



EST MODUS IN REBUS

[Cookie settings](#)

[Cookie policy](#)



Texture and Skid Resistance of Asphalt Concrete Surface Course Incorporating Geopolymer Artificial Aggregates



I Dewa Made Alit Karyawan, Iswandaru Widyatmoko,
Januarti Jaya Ekaputri, and Ervina Ahyudanari

Abstract Skid resistance is required to prevent vehicle wheels from slipping on a road surface. The skid resistance is influenced by surface texture of the road, which is a function of aggregate properties and grading characteristics. This study aimed to examine the effect of using artificial aggregates on the texture depth and the skid resistance of two asphalt concrete surface course (ACSC) mixtures (dense and open graded). The artificial aggregate, which was made from a mixture of a locally sourced fly ash geopolymer paste and an alkaline activator, was used to partially substituting the coarse aggregate in these ACSC mixtures. ACSC slab samples, without and with 25% artificial aggregate, were produced in laboratory. The texture depth and skid resistance characteristics were subsequently determined. This study found that the differences in texture depth and skid resistance of the two ACSC mixtures were contributed by the difference in gradation of the mixtures and the properties of the coarse aggregate in the mixtures. The ACSC mixture containing 100% natural coarse aggregate (crushed stone) has a deeper and rougher texture depth than those containing 25% rounded artificial aggregate. Post-wheel track loading, the texture depth and skid resistance of open graded ACSC were found to be higher than those of dense graded ACSC. These trends were consistent regardless the type of aggregates used in these ACSC samples. Overall, all tested samples showed skid resistance values meeting the requirements for heavily trafficked roads in urban areas where the traffic speed does not exceed 95 km/h.

Keywords Artificial aggregate · Asphalt concrete · Geopolymer · Skid resistance · Texture depth

I D. M. A. Karyawan (✉)

Civil Engineering Department, University of Mataram, Mataram 83125, Indonesia
e-mail: dewaalit@unram.ac.id

I. Widyatmoko

Transportation and Infrastructure Materials Research, AECOM, Nottingham NG9 6RZ, UK

Civil Engineering Department, Universitas Pertamina, Jakarta 12220, Indonesia

J. J. Ekaputri · E. Ahyudanari

Civil Engineering Department, Institut Teknologi Sepuluh Nopember, Surabaya 60111, Indonesia

1 Introduction

Surface textures can represent different levels of roughness and/or smoothness of pavement surfacing. One of them is macrotexture that is broadly formed by graded aggregate mixtures, bonded and compacted to produce a relatively smooth running surface but with some irregularities. In this context, larger irregularities can be associated with voids between aggregate particles, and these are often contributed by size and physical characteristics of aggregate particles [1]. Macrotexture is also essential in providing escape channels to water during the dynamic tyre-surface interactions, and therefore reducing risk to hydroplaning [2]. The macrotexture parameter is often represented as either texture depth or mean profile depth [3].

Skid resistance is the most important safety parameter in preventing incidents on road and airfield runway pavements. Therefore, careful consideration should be taken when selecting the right material, design, and construction of these pavements [4, 5]. Skid resistance can prevent the wheels from slipping on the pavement surface [6]. External factors such as traffic speed, wheel load, surface water film thickness, and depth of wheel tyre-tread, can also affect skid resistance. Low skid resistance increases the stopping distance of running vehicles and can increase the risk of safety incidents [7–9]. Variations in vehicle speed and thickness of surface water are known to compromise skid resistance [8]. In the context of carrying out mix design for asphalt concrete surface course (ACSC), excessive bitumen content must be avoided to prevent bleeding which can cause slippery on the pavement surface. Aggregate characteristics such as micro texture, shape, size and resistance to polishing, are known to influence skid resistance of the compacted asphalt mixture [5, 10].

Previous research has reported development of artificial aggregate, manufactured from by-product of manufacturing industry [11–13]. The resulting construction materials can help reduce dependence on non-renewable resource materials [5]. In addition, it will help the environment with regard to waste and reduce high energy consumption in the procurement of these materials [11]. However, the manufacturing process resulted in aggregate having relatively porous but rounded shape. The apparent shape and microstructure (under Scanning Electron Microscopy, SEM) of the artificial aggregate are illustrated in Fig. 1.

Figure 1a shows the form of artificial aggregate produced using granulator. The size of artificial aggregate depends on the addition of alkali activator, the angle of granulator and the rotation speed of granulator [12]. Figure 1b presents the microstructure of the artificial aggregate [13].

Further study was considered necessary to assess the impact from incorporating the relatively porous but rounded artificial aggregate on the macrotexture and skid resistance of ACSC. This paper presents findings from the study, aiming to examine the impact from using the artificial aggregate on the macrotexture (texture depth) and skid resistance of dense and open graded ACSC mixtures.

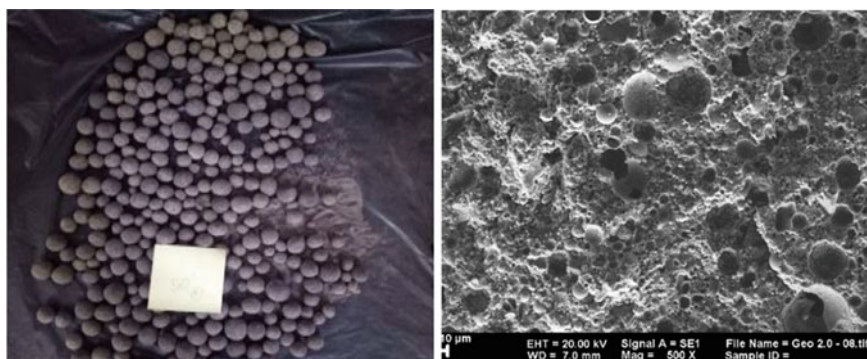


Fig. 1 Artificial aggregate: **a** apparent shape [12] and **b** microstructure [13]

2 Material

2.1 Component Materials

Based on the recommendation from the previous studies [11, 13], artificial aggregate was manufactured from a mixture of fly ash geopolymer paste and activator alkali at a ratio of 75:25%. The alkali activator was a mixture of sodium hydroxide and sodium silicate with a ratio of 2.5 [11–13]. In addition, natural material is mineral quarried aggregate which have been crushed into different fractions, namely: coarse aggregate, fine aggregate and filler. The physical properties of the natural and the artificial aggregates, as well as the organoleptic check of the apparent shape and surface texture (microtexture) of these aggregates, are summarized in Table 1.

The binder used to produce asphalt mixture was paving grade bitumen 60/70. The component materials used for producing the asphalt mixture met the requirements of the Indonesia National Specification (SNI) [14]. These component materials are illustrated in Fig. 2.

Table 1 Properties of artificial and natural aggregates

Properties	Unit	Test method	Artificial aggregate	Natural aggregate
Specific gravity	gr/cm ³	SNI 1969:2008	1.9	2.5
Water absorption	%	SNI 1969:2008	6.1	2.3
Durability (soundness)	%	SNI 3407:2008	5.2	9.7
Toughness (Los Angeles)	%	SNI 2417:2008	22.8	30.8
Apparent shape	–	–	Rounded	Angular
Apparent microtexture	–	–	Porous	Dense

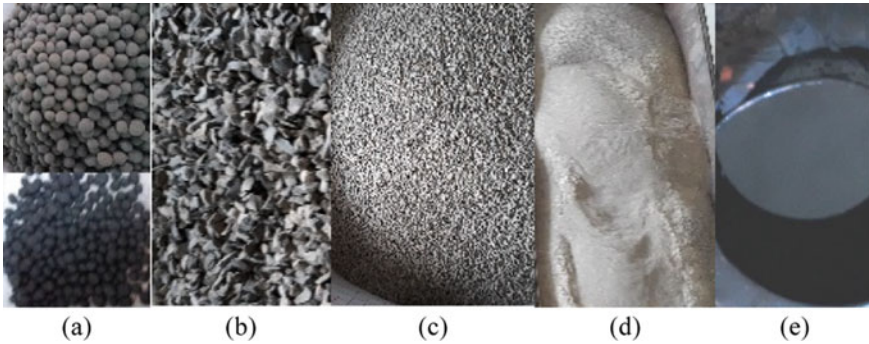


Fig. 2 a Artificial aggregate, b coarse aggregate, c fine aggregate, d filler, and e bitumen

2.2 Target ACSC Mixtures

Two sets of ACSC mixtures were produced, namely open and dense graded ACSC mixtures. These two mixture gradations are illustrated in Fig. 3.

Each sample set comprises either 100% natural aggregate (therefore without artificial aggregate), or, a mixture of 25% artificial aggregate and 75% natural aggregate. The proportions between artificial aggregate, natural aggregate and bitumen in each sample set are summarized in Table 2.

3 Methodology

This section presents the methodology for sample manufacturing and testing.

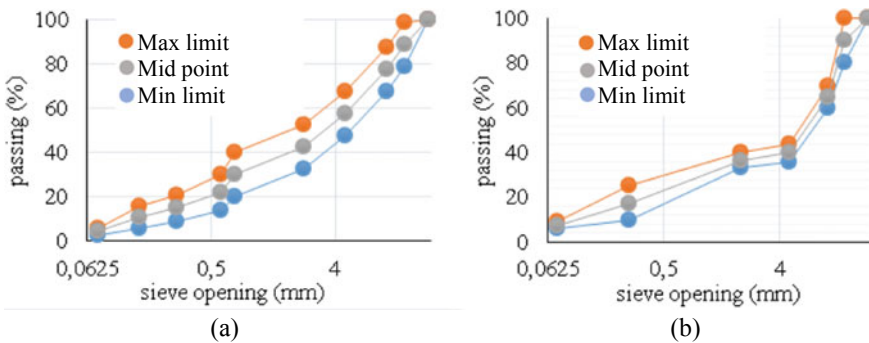
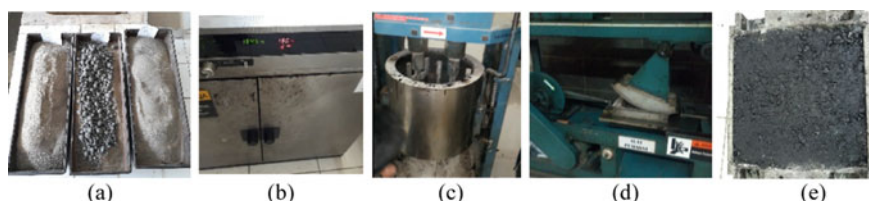


Fig. 3 Combined aggregate gradations: a dense graded and b open graded ACSC mixtures

Table 2 The proportions of material for each set of asphalt mixture

Sample set	Density (g/cm ³)	Total sample weight (g)	Artificial aggregate weight (g)	Natural aggregate (g)	Bitumen weight (g)
Dense graded without artificial aggregates	2.330	10,490	0	9871	619
Dense graded with 25% artificial aggregate	2.180	9810	2328	6982	500
Open graded without artificial aggregates	2.320	10,440	0	9814	626
Open graded with 25% artificial aggregate	2.220	9990	2345	7036	609

**Fig. 4** Asphalt slab manufacturing process: **a** material preparation, **b** heating of the material, **c** mixing process, **d** compaction process, **e** samples ready to be tested

3.1 Sample Manufacturing

The four sets of ACSC samples were manufactured by using a laboratory roller compactor. Each loose asphalt mixture was compacted in a mould with a dimension of 30 cm × 30 cm × 5 cm (see Fig. 4). The four sets of compacted ACSC samples are illustrated in Fig. 5.

3.2 Macrotexture and Skid Resistance Measurements of Samples

Surface characteristics of the ACSC sample sets were assessed under two conditions: (1) pre-wheel track loading and (2) post-wheel-track loading. Wheel track loading was carried out using a laboratory small scale wheel track tester, running at 21 passes

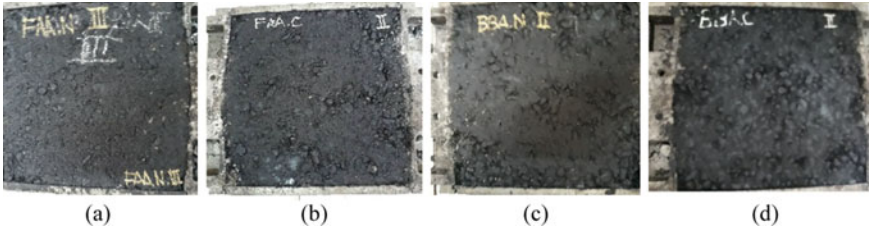


Fig. 5 Four asphalt mixture sample sets: **a** dense graded without artificial aggregate, **b** dense graded with 25% artificial aggregate, **c** open graded without artificial aggregate, **d** open graded with 25% artificial aggregate

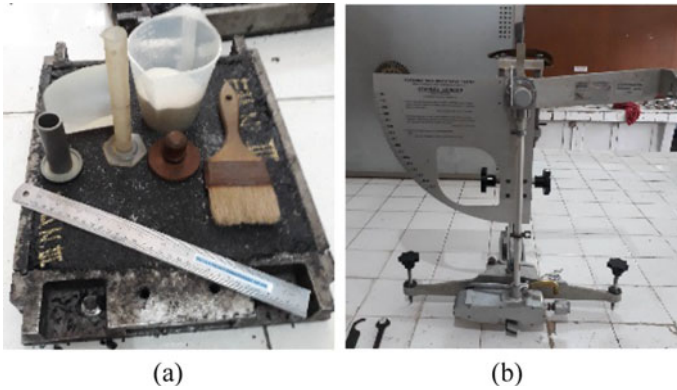


Fig. 6 **a** Sand patch to measure texture depth, **b** BPT to measure skid resistance

per minute for 60 min at 60 °C. Measurement of surface characteristics includes: (a) determining texture depth using the sand patch method, and (b) assessing skid resistance using a British Pendulum Tester (BPT). These methods are illustrated in Fig. 6. Test results and discussions are presented in Sect. 4.

3.2.1 Macrotexture

The sand patch tests were carried out on the test section to determine an equivalent mean texture depth (MTD) [15]. The texture depth was calculated based on the amount of fine sand that is required to cover irregularity and pores of the sample surface. This process involves pouring fine sand with a certain volume (V_s) over the sample surface and then spread evenly with a circular motion in a circle until the sand is levelled with the surface (ASTM E965-06) [16]. The final diameter of the circled sand (d) is measured in 4 directions (horizontal, vertical, and diagonal) and the results are averaged. The area of the circle ($A_s = 1/4\pi d^2$), then the mean texture depth (MTD), can be calculated using “Eq. (1)”.

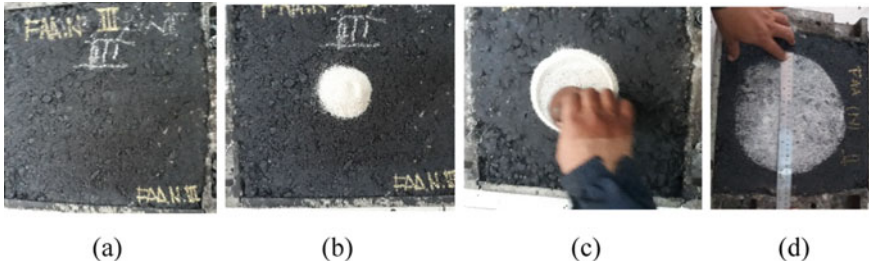


Fig. 7 Texture measurements on the ACSC sample (pre-wheel track loading): **a** the sample, **b** the sand is poured onto the sample surface, **c** the sand is leveled using a circular motion, **d** measurement of the diameter of the sand circle in four positions

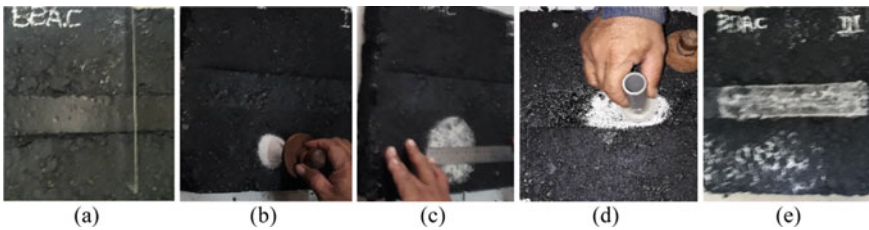


Fig. 8 Texture measurements on the ACSC sample (post-wheel track loading): **a** the sample under the wheel track load conditions, **b** the sand is poured onto the sample surface (outside the track), then leveled, **c** measurements in the four directions of the circle diameter, **d** the sand is poured and smoothed on the track, **e** measurement of the length of the sand distribution on the track

$$MTD = V_s/A_s = V_s/(1/4\pi d^2) = 4V_s/\pi d^2 \tag{1}$$

The texture depth was measured in two conditions: pre- and post-wheel track loading. For the post-wheel track loading condition, two set of measurements were made, namely outside and inside the wheel track. The pre loading test process is shown in Fig. 7, and post loading in Fig. 8.

3.2.2 Skid Resistance

Skid resistance was determined using a BPT. For this test, a small rubber foot (75 mm × 25 mm) was used. The pendulum was released, swinging over the test surface and the skid resistance value was determined as the British Pendulum Number (BPN). The final BPN value is the average of the five readings after temperature correction was applied to normalize the test condition to 20 °C, according BS EN 13036-4; see Table 3 [17].

Table 3 Temperature correction for BPN when tested at other than 20 °C [17]

Measured slider temperature (°C)	Correction to measured value
36–40	+3
30–35	+2
23–29	+1
19–22	0
16–18	–1
11–15	–2
8–10	–3
5–7	–4

Note The temperature correction can be affected by the texture of the surface

The samples used for skid resistance testing were the same sample as those subjected to the texture depth assessment. With a note that the skid resistance assessment was carried out before measuring the texture, so that the test surface remained clean without contamination from traces of sand on the surface.

The skid resistance assessment was carried out under two conditions: pre and post wheel track loading. In the post-loading condition, the skid resistance test was only carried out on the outside of the wheel track. The section within the wheel track was not tested, because the pendulum head is wider than the track width, which prevented it from reaching the tracked surface. The pre loading test process is shown in Fig. 9, and post loading in Fig. 10.

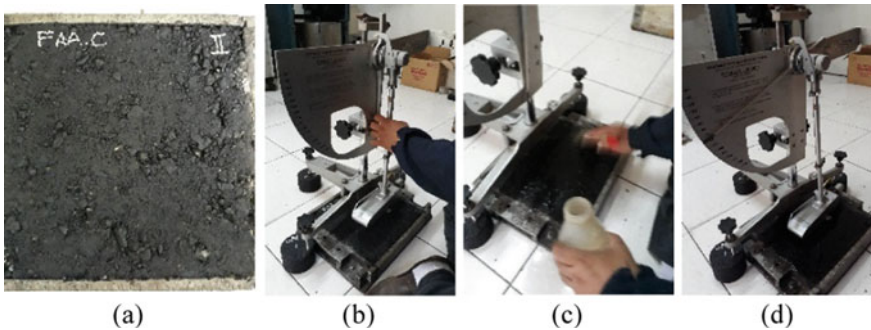


Fig. 9 Measure the skid resistance on the ACSC plate using a BPT (pre-wheel track loading): **a** the sample, **b** setting the BPT, **c** wetting the sample surface, then swinging the pendulum, **d** reading the dial

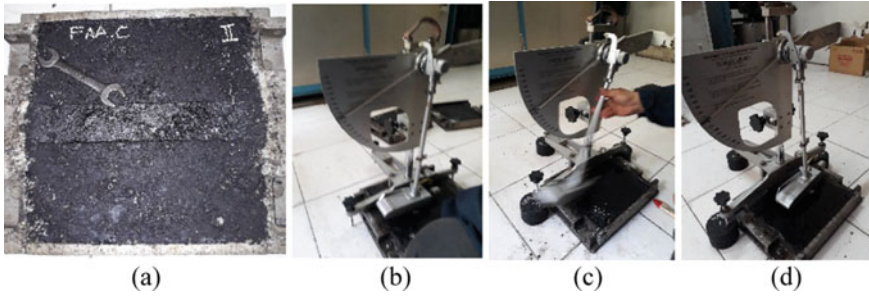


Fig. 10 Measuring the slip resistance on the ACSC plate using a BPT (post-wheel track loading): **a** a sample plate that has been given a wheel track load, **b** setting the BPT, **c** wetting the sample surface, then swinging the pendulum, **d** reading the dial

4 Results and Discussion

The properties of artificial aggregates show advantages over the natural aggregates, specifically in terms of durability and toughness, as shown in Table 1. The durability by soundness test showed that the artificial aggregate has better resistance to degradation than the natural aggregate. Also, the toughness by Los Angeles abrasion test showed that the artificial aggregate has better wearing resistance than the natural aggregate. The organoleptic check of the apparent shape and microtexture of these aggregates suggested that the more rounded and porous artificial aggregate has surface characteristics which are less favourable than those of the more angular and dense natural aggregate. These can be seen as potential risks to compromising the surface characteristics of the asphalt mixtures, therefore, subsequent assessment of texture depth and skid resistance on the ACSC samples containing these aggregates were carried out.

Figure 11 shows that the inclusion of artificial aggregate did not have practical

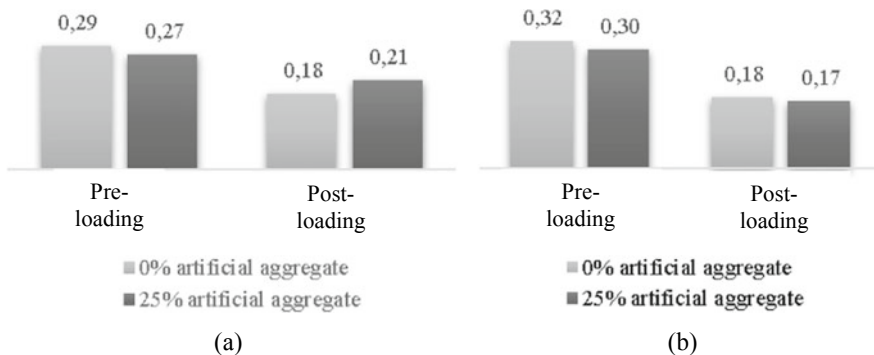


Fig. 11 Comparison of the results of ACSC texture depth measurements without (0%) and with 25% artificial aggregate **a** dense graded, **b** open graded, pre- and post-wheel track loading

impact to the texture depths of both sets of ACSC samples, dense and open graded. The texture depth values appear to be comparable for both samples sets. Similar trend is also observed for the texture depth values obtained before and after wheel track loading where the observed reduction in texture depths appear to be of a similar magnitude for both sample sets. Note that the reporting requirement for texture depth values is typically to the nearest 0.1 mm, however the test results are presented to the nearest 0.01 mm for the purpose demonstrating the slight differences in the values.

Higher skid resistance value is known to be related to rougher surface. In the BPT test, the measurement scale starts from 0 to 120. A scale of 0 means that the surface is very slippery (zero resistance against skidding). Conversely, the value 120 is the maximum value at which the pendulum does not swing further, after touching on the test surface. The test results show that for dense graded ACSC samples, the skid resistance value for those without artificial aggregate is higher than those with artificial aggregate. In contrast, for open graded ACSC samples, the skid resistance of those with artificial aggregates is slightly higher than those without artificial aggregate, after being loaded by the wheel tracking test (see Fig. 12).

Figure 12 explains the impact from apparent aggregate shape on skid resistance. For the ACSC mixture without artificial aggregate (therefore containing 100% angular natural aggregate), the skid resistance value seems to be higher than those containing 25% artificial aggregate. As stated previously, the apparent shape of the artificial aggregates was rounded. These results suggest that the rounded artificial coarse aggregate used in the mixture has contributed to the skid resistant values being lower than those containing 100% crushed natural aggregate. Overall however the skid resistant values for these samples are not less than BPN 65, indicating good skid resistance characteristics under the adopted test condition. When compared against the site category for the minimum values of ‘skid resistance’ as measured with the portable tester suggested by Road Note 27 [18], the BPN results for these samples

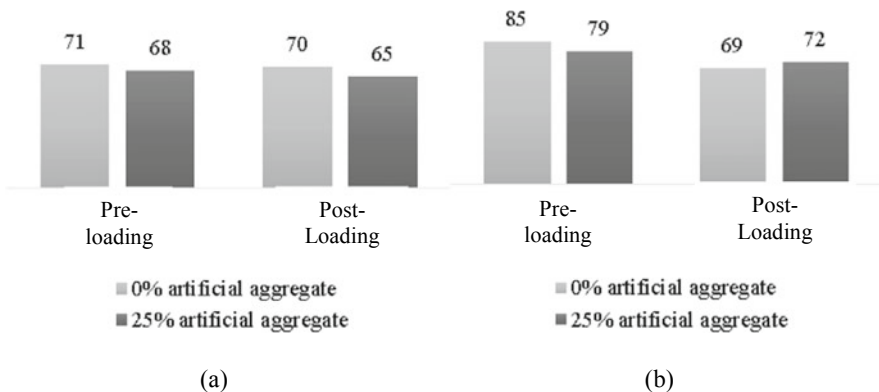


Fig. 12 Comparison of the results of ACSC skid resistance measurements without (0%) and with 25% artificial aggregate **a** dense graded, **b** open graded, pre- and post-wheel track loading

Table 4 Suggested minimum values of 'skid resistance' [18]

Category	Type of site	Minimum 'skid-resistance' (wet surface)
A	Difficult sites such as: (a) Roundabouts (b) Bends with radius less than 150 m on unrestricted roads (c) Gradients, 1 in 20 or steeper, of lengths greater than 100 m (d) Approaches to traffic lights on unrestricted roads	65
B	Motorways, trunk and class 1 roads and heavily trafficked roads in urban areas (carrying more than 2000 vehicles per day)	55
C	All other sites	45

Note For category A and B sites where speed of traffic is high (in excess of 95 km/h) an additional requirement is a minimum 'texture depth' of 0.65 mm

meet the requirements for category B, for site where traffic speed does not exceed 95 km/h (reproduced in Table 4).

5 Conclusion and Recommendation

Tests on aggregate properties demonstrated durability and toughness values of the artificial aggregate being better than those of the natural aggregate. The macrotexture of the ASCS produced with a blend of artificial and natural aggregates was found to be comparable to that produced with 100% natural aggregate. The apparent aggregate shape and surface texture seems to have influenced the skid resistance. The results showed that the use of 25% artificial aggregate resulted a decrease in skid resistance of the ACSC surface. Dense graded ACSC showed slightly lower texture depth and skid resistance values than the open graded ACSC. Post-wheel track loading, the texture depth and skid resistance of open graded ACSC were found to be higher than those of dense graded ACSC, regardless the type of aggregates used in these ACSC samples.

It is necessary to explore in the next research how to increase the skid resistance on the ACSC surface. The scope of the study on the shape of the aggregate, the strength of the aggregate, its impact on the area of contact with tyre and the grading of the aggregate still needs to be developed. Therefore, further research is recommended to explore these and other influencing factors such as finding alternatives to assess the sensitivity of the dimension of the contact area between the rubber wheel and the ACSC surface on the skid resistance value and carrying out field validation testing.

References

1. Bhadane KR, Naktode DPL (2020) A literature review: surface texture characteristics and frictional noise of the pavement. *Aegaeum J* 8(5):745–751
2. Kienle R, Ressel W, Götz T, Weise M (2018) The influence of road surface texture on the skid resistance under wet conditions. February 6, 2018
3. Li QJ, Zhan Y, Yang G, Wang KCP (2020) Pavement skid resistance as a function of pavement surface and aggregate texture properties. *Int J Pavement Eng* 21(10):1159–1169
4. Mataei B, Zakeri H, Zahedi M, Nejad FM (2016) Pavement friction and skid resistance measurement methods: a literature review. *Open J Civ Eng* 6:537–565
5. Wang GC (2016) Slag use in asphalt paving; the utilization of slag in civil infrastructure construction, 2016. <https://www.sciencedirect.com/topics/engineering/skid-resistance>
6. Dunlap DF, Fancher PS, Scott RE, MacAdam CC, Segel L (1976) *Transp Res Rec* 584:15–21
7. Yager TJ (2013) Retired NASA research engineer consultant on tire/pavement friction issues. Presented at Tenth ALACPA Airport Pavement Seminar Mexico City, Mexico; 30 September–4 October 2013
8. Pasindu HR, Fwa TF, Ong GP (2012) Analysis of skid resistance variation on a runway during an aircraft landing operation. In: Seventh international conference on maintenance and rehabilitation of pavements and technological control, Auckland, January 2012. New Zealand
9. Sekartadji R, Karyawan IDMA (2021) Analysis of the causes and prevention of runway excursions. In: ICST conference, December 14th 2020, Proceeding ICST (2021) vol 2, June 2021. e-ISSN: 2722-7375
10. Sengoz B, Onsoni A, Topal A (2014) Effect of aggregate shape on the surface properties of flexible pavement; properties of flexible pavement. *KSCE J Civ Eng* 18(5):1–8
11. Karyawan IDMA, Ekaputri JJ, Widyatmoko I, Ahyudanari E (2019) The effects of $\text{Na}_2\text{SiO}_3/\text{NaOH}$ ratios on the volumetric properties of fly ash geopolymer artificial aggregates. *Mater Sci Forum* 967:228–235
12. Yuliana HA, Karyawan IDMA, Murtiadi S, Ekaputri JJ, Ahyudanari E (2019) The Effect of slope granulator on the characteristic of artificial geopolymer aggregate. *J Eng Sci Technol* 14(3):1466–1481
13. Karyawan IDMA, Ekaputri JJ, Widyatmoko I, Ahyudanari E (2020) The effect of various $\text{Na}_2\text{SiO}_3/\text{NaOH}$ ratios on the physical properties and microstructure of artificial aggregates. *J Eng Sci Technol* 15(2):1139–1154
14. Spesifikasi Umum Bina Marga Konstruksi Jalan dan Jembatan. Ditjen Bina Marga. Kementerian PUPR. 2018
15. Yaacob H, Bituminous pavement surface texture and skid resistance testing: the investigation of surface roughness of bituminous pavements
16. ASTM E965-06 (2006) Standard test method for measuring pavement macro texture depth using a volumetric technique. ASTM
17. BS EN 13036-4 (2011) Road and airfield surface characteristics—test methods part 4: method for measurement of slip/skid resistance of a surface: the pendulum test. BSI
18. Road Note 27 (1969) Instructions for using the portable skid-resistance tester. Road Research Laboratory. HMSO London